PRODUCT SPECIFICATION

DATE：05/05/2011

cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 1 OF 6	

Optoisolators TRIAC Driver Output

(600V Volts Peak)

● Features

1. Compact long creepage distance type package.
2. 600V peak blocking voltage.
3. Isolation voltage between input and output (Viso：5000Vrms).

● For 115/240 Vac(rms) Application：


1. Solenoid/Valve Controls.
2. Lighting Controls.
3. Static Power Switches.
4. AC Motor Drives.
5. Temperature Controls.
6. E.M. Contactors.
7. AC Motor Starters.
8. Solid State Relays.
9. Programmable controllers.

PRODUCT SPECIFICATION

DATE：05/05/2011


cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 2 OF 6	

1. OUTSIDE DIMENSION：UNIT (mm)

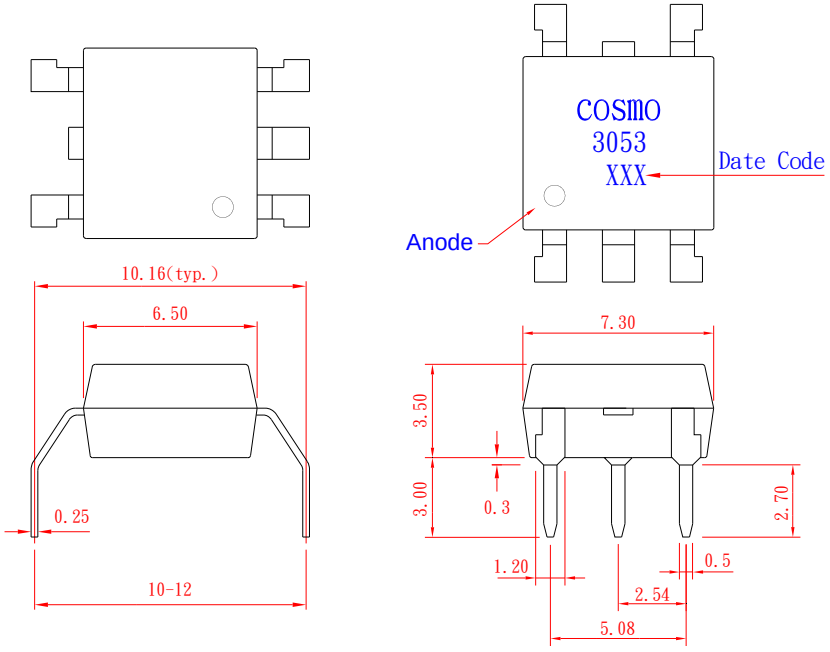

TOLERANCE：±0.2mm

2. SCHEMATIC：TOP VIEW

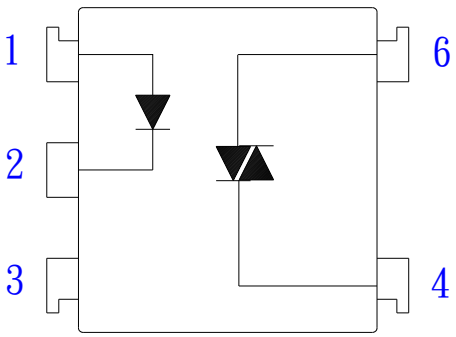

1. Anode
2. Cathode
3. NC
4. Main Terminal
6. Main Terminal

PRODUCT SPECIFICATION

DATE：05/05/2011

cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 3 OF 6	

● Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	70	mW
Output	Off-State Output Terminal voltage	V_{DRM}	600	V_{PEAK}
	On-State R.M.S. Current	$I_{T(RMS)}$	100	mA
	Peak Repetitive Surge Current (PW=10ms.DC 10%)	I_{TSM}	1	A
	Power dissipation	P_D	300	mW
Total power dissipation		Ptot	330	mW
Isolation voltage 1 minute		Viso	5000	Vrms
Operating temperature		Topr	-40 to +100	℃
Storage temperature		Tstg	-50 to +125	℃
Soldering temperature 10 second		Tsol	260	℃

● Electro-optical Characteristics

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	I_F=10mA	-	1.2	1.4	V
	Peak forward voltage	V_{FM}	I_{FM}=0.5A	-	-	3.5	V
	Reverse current	I_R	V_R=4V	-	-	10	uA
Output	Peak Blocking Current	I_{DRM}	V_{DRM}=600V	-	-	100	nA
	ON-State Voltage	V_{TM}	I_{TM}=100mA	-	1.6	3	V
Tranfer charac-teristics	Holding Current	I_H		-	0.1	-	mA
	Critical rate of rise of OFF-state voltage	dV/dt	$V_{DRM}=(1/\sqrt{2})$*Rated	600	-	-	V/uS
	Isolation resistance	Riso	DC500V	$5x10^{10}$	10^{11}	-	Ohm
	Minimum trigger current	I_{FT}	Main Terminal Voltage=3V	-	-	5	mA
	Turn-on time	Ton	V_D=6V,R_L=100Ohm,I_F=20mA	-	-	100	uS

PRODUCT SPECIFICATION

DATE：05/05/2011

cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 4 OF 6	

Fig.1 Forward Current vs. Ambient Temperature

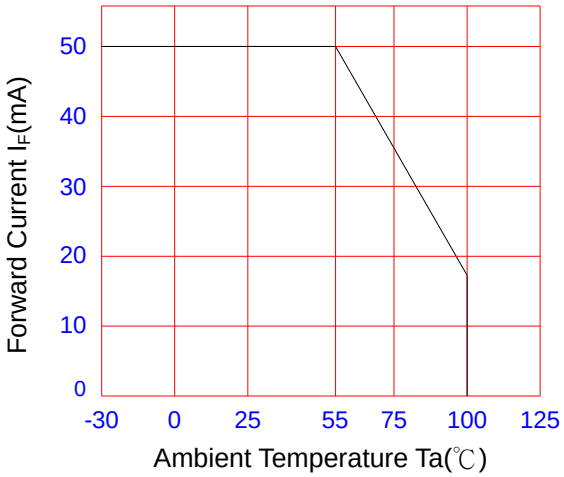


Fig.2 Diode Power Dissipation vs. Ambient Temperature

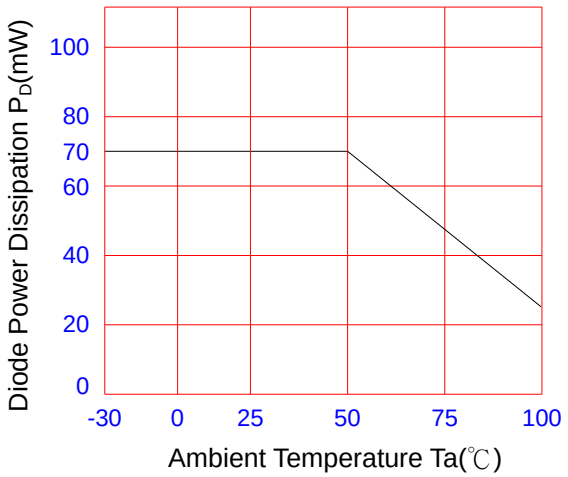


Fig.3 On-State R.M.S. Current vs. Ambient Temperature

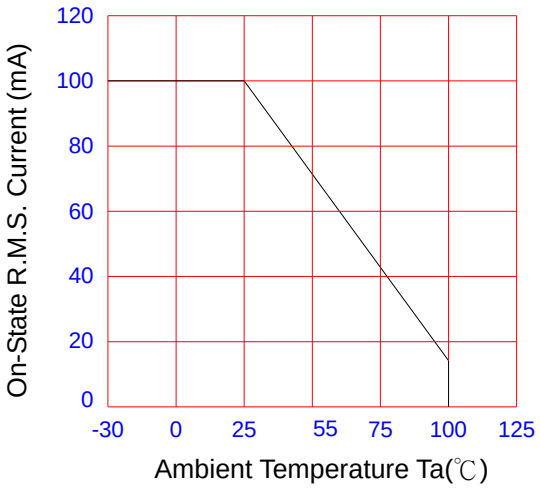


Fig.4 Total Power Dissipation vs. Ambient Temperature

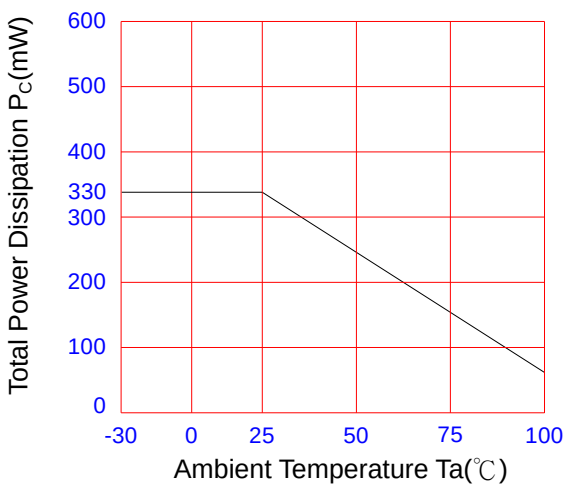


Fig.5 Peak Forward Current vs. Duty Ratio


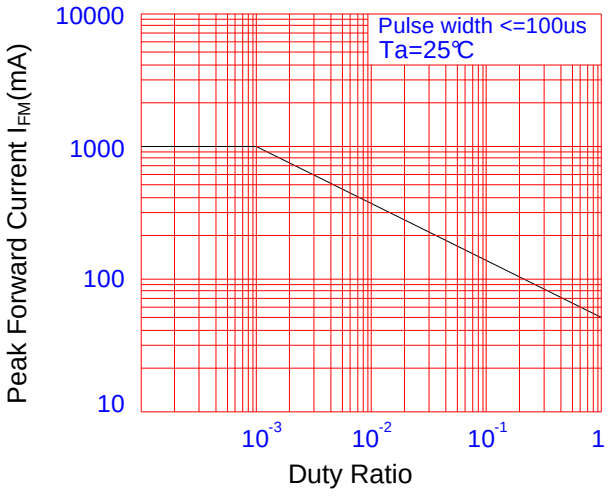


Fig.6 Forward Current vs. Forward Voltage

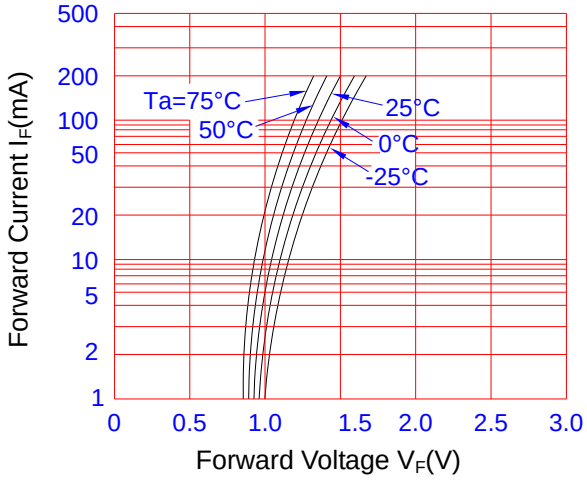

PRODUCT SPECIFICATION

DATE：05/05/2011

cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 5 OF 6	

Fig.7 On-State Characteristics

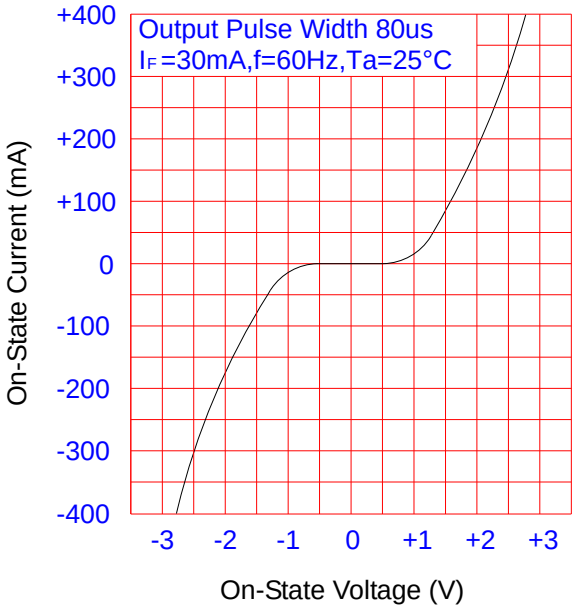


Fig.8 Leakage with LED off vs. Ambient Temperature


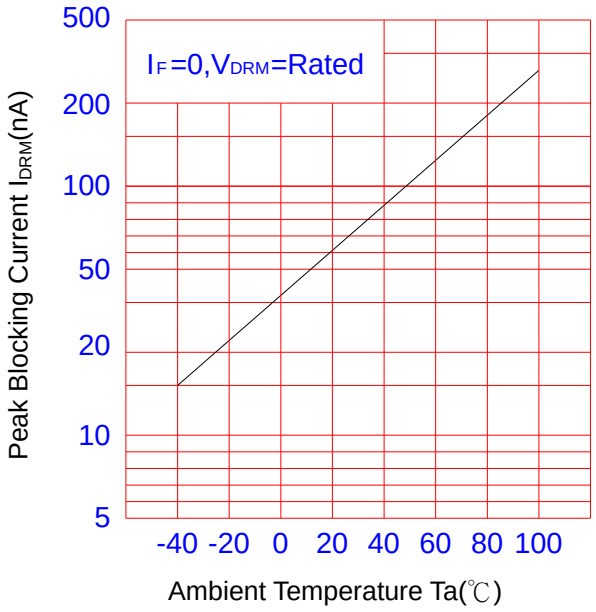


Fig.9 Trigger Current vs. Ambient Temperature

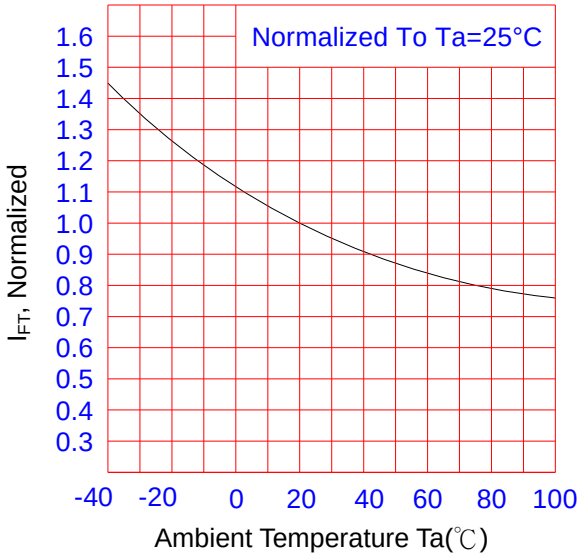

PRODUCT SPECIFICATION

DATE：05/05/2011

cosmo ELECTRONICS CORPORATION	Photocoupler： KMOC3053H	NO.62P41004	REV. 3
		SHEET 6 OF 6	

NOTICE

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo . No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as：

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.