



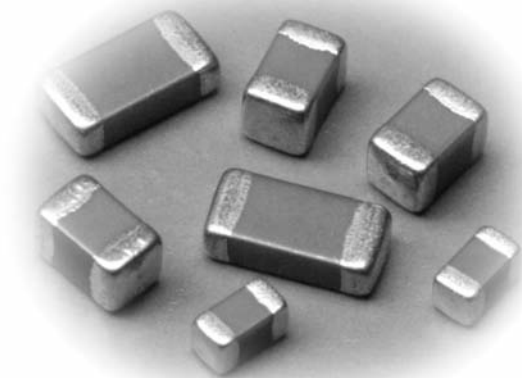

features

- High Q factor
- Low T.C.C.
- Available in high capacitance values (up to 100 μ F)
- Products with lead-free terminations meet EU RoHS requirements

dimensions and construction

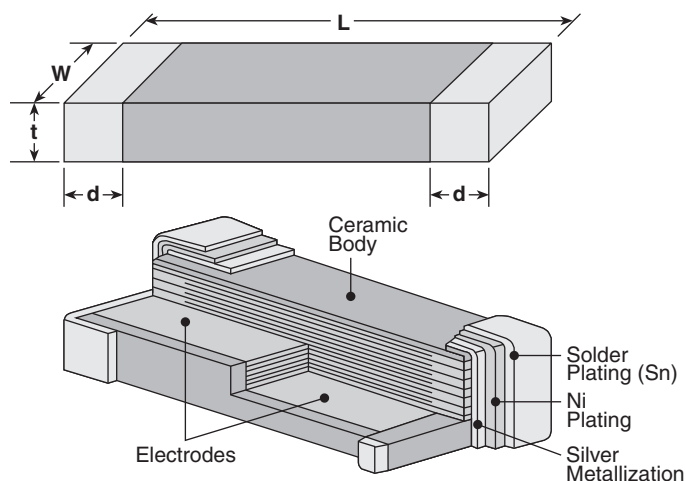

Case Size	Dimensions inches (mm)			
	L	W	t (Max.)	d
0402	.039 $\pm$.004 (1.0 $\pm$ 0.1)	.02 $\pm$.004 (0.5 $\pm$ 0.1)	.021 (0.55)	.01 $\pm$.006 (0.25 $\pm$ 0.15)
0603	.063 $\pm$.006 (1.6 $\pm$ 0.15)	.032 $\pm$.006 (0.81 $\pm$ 0.15)	.035 (0.9)	.014 $\pm$.006 (0.35 $\pm$ 0.15)
0805	.079 $\pm$.008 (2.01 $\pm$ 0.2)	.049 $\pm$.008 (1.25 $\pm$ 0.2)	.051 (1.3)	.02 $\pm$.01 (0.50 $\pm$ 0.25)
1206	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.063 $\pm$.008 (1.6 $\pm$ 0.2)	.059 (1.5)	.02 $\pm$.01 (0.5 $\pm$ 0.25)
1210	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.098 $\pm$.008 (2.5 $\pm$ 0.2)	.067 (1.7)	.02 $\pm$.01 (0.5 $\pm$ 0.25)

ordering information

New Part #	NPO	0805	H	T	TD	101	K
	Dielectric	Size	Voltage	Termination Material	Packaging	Capacitance	Tolerance
	NPO X5R X7R Y5V	0402 0603 0805 1206 1210	A = 10V C = 16V E = 25V H = 50V I = 100V J = 200V K = 6.3V	T: Sn	TP: 7" 2mm pitch (0402 only) TD: 7" paper tape TE: 7" embossed plastic TDB: 13" paper tape TEB: 13" embossed plastic	NPO, X5R, X7R, Y5V: 2 significant digits + no. of zeros. "R" indicates decimal point	B: $\pm$ 0.1pF C: $\pm$ 0.25pF D: $\pm$ 0.5pF F: $\pm$ 1% G: $\pm$ 2% J: $\pm$ 5% K: $\pm$ 10% M: $\pm$ 20% Z: +80, -20%

For further information on packaging,
please refer to Appendix B.


applications and ratings

Dielectric	Capacitance Range	Capacitance Tolerance*	Voltage Ratings	Dissipation Factor	T.C.C.	Test Voltage	Operating Temperature	Insulation Resistance
NPO	0.47pF - 0.010μF	.47pF~8.2pF= C:±0.25pF 5.6pF~8.2pF= D±0.5pF 10pF~ 10000pF= F:±1%, G:±2%,J:±5%	16V 25V 50V 100V 200V	For Values >30pF: 0.1% max., ≤30pF: Q = 400 + 20 x C DF = 1/Q C is in pF	0 ± 30 ppm/°C	1.0 ± 0.2 Vrms	-55°C to +125°C	+25°C 100,000MΩ min. or 1000 MΩ - μF min. whichever is less
X5R	0.068μF - 22μF	K: ±10%	6.3V 10V	6.3V = 7.5% max. 10V = 10% max.	±15% (0 VDC)	1.0 ± 0.2 Vrms	-55°C to +85°C	+25°C 100,000MΩ min. or 500 MΩ - μF min. whichever is less
X7R	100pF - 4.7μF	K: ±10%	10V 16V 25V 50V 100V 200V	10V = 10% max. 16V = 3.5% max. 25V, 50V, 100V = 2.5% max.	±15% (0 VDC)	1.0 ± 0.2 Vrms	-55°C to +125°C	+25°C 100,000MΩ min. or 1000 MΩ - μF min. whichever is less
Y5V	10000pF - 22μF	Z: +80, -20%	10V 16V 25V 50V	16V & 25V = 7.0% 50V = 5.0%	+22% to -82% max.	1.0 ± 0.2 Vrms	-30°C to +85°C	+25°C 10,000MΩ min. or 1000 MΩ - μF min. whichever is less


* Special tolerances available, please consult factory.

environmental applications


Insulation Resistance vs Temp.

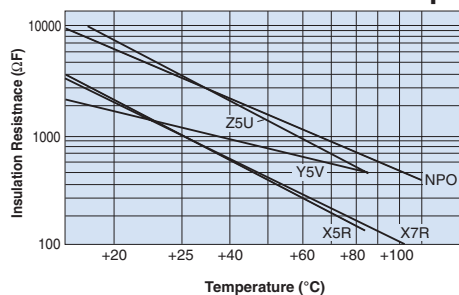


NPO - Temperature Coefficient

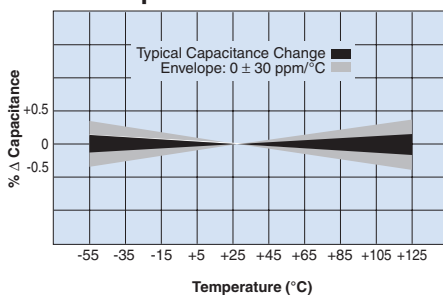


X5R - Temperature Coefficient

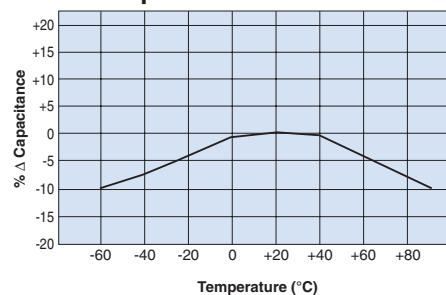

X7R - Temperature Coefficient

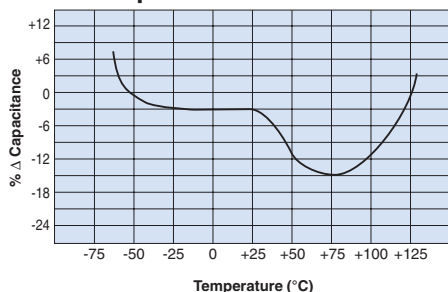

Y5V - Temperature Coefficient

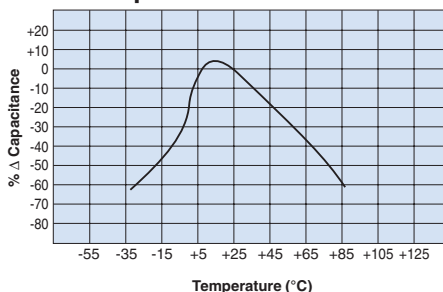

NPO capacitance voltage availability

Size				0402*			0603*		0805			1206			1210	
Capacitance values pF	Cap. Code	WVDC		16 (C)	25 (E)	50 (H)	50 (H)	100 (I)	50 (H)	100 (I)	200 (J)	50 (H)	100 (I)	200 (J)	50 (H)	200 (J)
0.47	R47															
0.56	R56															
0.68	R68															
0.82	R82															
1	1R0															
1.2	1R2															
1.5	1R5															
1.8	1R8															
2.2	2R2															
2.7	2R7															
3.3	3R3															
3.9	3R9															
4.7	4R7															
5.6	5R6															
6.8	6R8															
8.2	8R2															
10	100															
12	120															
15	150															
18	180															
22	220															
27	270															
33	330															
39	390															
47	470															
56	560															
68	680															
82	820															
100	.0001 101															
120	.00012 121															
150	.00015 151															
180	.00018 181															
220	.00022 221															
270	.00027 271															
330	.00033 331															
390	.00039 391															
470	.00047 471															
560	.00056 561															
680	.00068 681															
820	.00082 821															
1000	.0010 102															
1200	.0012 122															
1500	.0015 152															
1800	.0018 182															
2200	.0022 222															
2700	.0027 272															
3300	.0033 332															
3900	.0039 392															
4700	.0047 472															
5600	.0056 562															
6800	.0068 682															
8200	.0082 822															
10000	.010 103															
12000	.012 123															
15000	.015 153															
18000	.018 183															
22000	.022 223															
27000	.027 273															
33000	.033 333															
39000	.039 393															

Capacitance tolerance available:

.47pF~8.2pF = C: $\pm 0.25\text{pF}$

5.6pF~8.2pF = D: $\pm 0.5\text{pF}$

10pF~10000pF = F: $\pm 1\%$, G: $\pm 2\%$, J: $\pm 5\%$

X5R capacitance voltage availability

Size		0402			0603				0805				1206				1210	
Capacitance values pF μF		6.3 (K)	10 (A)	16 (C)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)
100																		
150																		
220																		
330																		
470																		
680																		
1000																		
1200																		
1500																		
1800																		
2200																		
2700																		
3300																		
3900																		
4700																		
5600																		
6800																		
8200																		
0.010																		
0.012																		
0.015																		
0.018																		
0.022																		
0.027																		
0.033																		
0.039																		
0.047																		
0.056																		
0.068																		
0.082																		
0.10																		
0.12																		
0.15																		
0.18																		
0.22																		
0.27																		
0.33																		
0.47																		
0.56																		
0.68																		
0.82																		
1.0																		
1.2																		
1.5																		
1.8																		
2.2																		
3.3																		
4.7																		
6.8																		
10																		
22																		
47																		
100																		

Capacitance tolerance available: ±10%

X7R capacitance voltage availability

Size			0402				0603				0805						1206						1210		
Capacitance values			10	16	25	50	10	16	25	50	10	16	25	50	100	200	10	16	25	50	100	200	50	100	200
pF	μF	Cap. Code	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(I)	(J)	(A)	(C)	(E)	(H)	(I)	(J)	(H)	(I)	(J)
100	.0001	101																							
120	.00012	121																							
150	.00015	151																							
180	.00018	181																							
220	.00022	221																							
270	.00027	271																							
330	.00033	331																							
390	.00039	391																							
470	.00047	471																							
560	.00056	561																							
680	.00068	681																							
820	.00082	821																							
1000	.0010	102																							
1200	.0012	122																							
1500	.0015	152																							
1800	.0018	182																							
2200	.0022	222																							
2700	.0027	272																							
3300	.0033	332																							
3900	.0039	392																							
4700	.0047	472																							
5600	.0056	562																							
6800	.0068	682																							
8200	.0082	822																							
10000	.010	103																							
12000	.012	123																							
15000	.015	153																							
18000	.018	183																							
22000	.022	223																							
27000	.027	273																							
33000	.033	333																							
39000	.039	393																							
47000	.047	473																							
56000	.056	563																							
68000	.068	683																							
82000	.082	823																							
100000	.100	104																							
120000	.120	124																							
150000	.150	154																							
180000	.180	184																							
220000	.220	224																							
270000	.270	274																							
330000	.330	334																							
390000	.390	394																							
470000	.470	474																							
560000	.560	564																							
680000	.680	684																							
1000000	1.00	105																							
1200000	1.20	125																							
1500000	1.50	155																							
1800000	1.80	185																							
2200000	2.20	225																							
3900000	3.90	395																							
4700000	4.70	475																							

Capacitance tolerance available: ±10%

Y5V capacitance voltage availability

Size			0402		0603				0805				1206			
Capacitance values			10	16	10	16	25	50	10	16	25	50	10	16	25	50
pF	μF	Cap. Code	(A)	(C)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)
2200	.0022	222														
2700	.0027	272														
3300	.0033	332														
3900	.0039	392														
4700	.0047	472														
5600	.0056	562														
6800	.0068	682														
8200	.0082	822														
10000	.010	103														
12000	.012	123														
15000	.015	153														
18000	.018	183														
22000	.022	223														
27000	.027	273														
33000	.033	333														
39000	.039	393														
47000	.047	473														
56000	.056	563														
68000	.068	683														
82000	.082	823														
100000	.100	104														
120000	.120	124														
150000	.150	154														
180000	.180	184														
220000	.220	224														
270000	.270	274														
330000	.330	334														
390000	.390	394														
470000	.470	474														
560000	.560	564														
680000	.680	684														
820000	.820	824														
1000000	1.0	105														
1200000	1.2	125														
1500000	1.5	155														
1800000	1.8	185														
2200000	2.2	225														
2700000	2.7	275														
3300000	3.3	335														
3900000	3.9	395														
4700000	4.7	475														
5600000	5.6	565														
6800000	6.8	685														
10000000	10	106														
22000000	22	226														

Capacitance tolerance available: +80, -20%