

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
HH

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

ECN

DATE

DWN

APVD

D

INTEGRATION

ECO-06-017047

31-JUL-06

G. L

N. F

DRILLING DIAGRAM (BOTTM VIEW)
プリント基板加工図：底面図 (2/1)

2- $\phi 1.0$ 穴 4- $\phi 1.2$ 穴

7.5 ± 0.1

15 ± 0.1 5 ± 0.1

CONNECTION DIAGRAM (BOTTM VIEW)
接続図

24.80 ± 0.5

4 ± 0.5

0.45 0.30 0.50

0.90 0.90

D SEE DRAWING 3-1419124-9

7.50 ± 0.2 7.50 ± 0.2 12.90 ± 0.5

1.95 15 ± 0.2 5 ± 0.2 2.45

24.40 ± 0.5

TOLERANCE

Diagram dimension	Tolerance
max. 1mm	± 0.1 mm
1 - 3mm	± 0.2 mm
min. 3mm	± 0.3 mm

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

単位： 耗

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	\pm
1 PLC	\pm
2 PLC	\pm
3 PLC	\pm
4 PLC	\pm
ANGLES	\pm

MATERIAL

材料

FINISH

仕上

DWN H. SASAKI

CHK Y. OIKAWA

APVD A. NAGAI

PRODUCT SPEC
製品規格 -APPLICATION SPEC
取付通用規格 -

WEIGHT -

CUSTOMER DRAWING

Tyco Electronics EC K.K.
Tochigi, Japan

NAME

名称

OSA-SH-DM5, 600, 600M

SIZE

A3

CAGE CODE

00779

DRAWING NO

7-1440004-7

RESTRICTED TO

-


SCALE
尺度 4 : 1

SHEET 1 OF 2

REV D

4 3 2 1
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
HH								

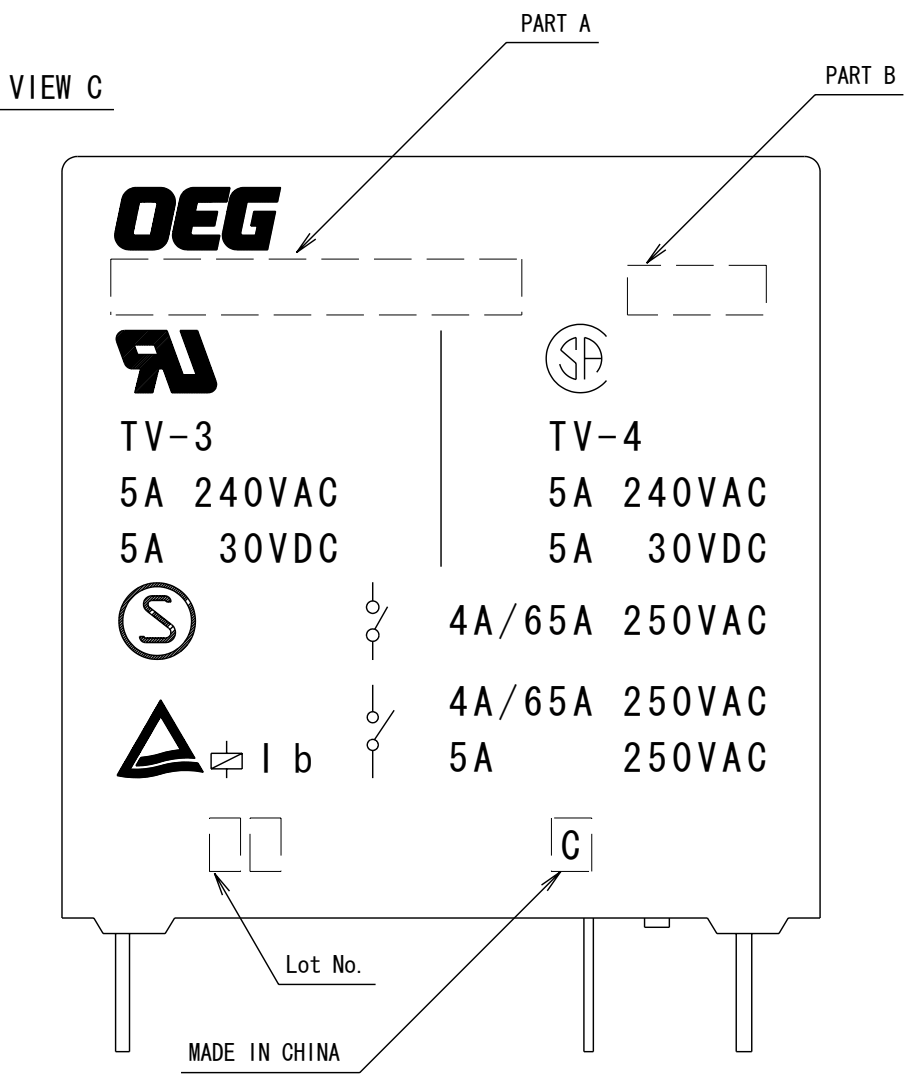

D SEE DRAWING 3-1419124-9

PART NO	EC TYPE NAME	PART B	PART A	ITEM
8-1440001-4	OSA-SH-224DM5 , 600M	24VDC	OSA-SH-224DM5	e
8-1440001-2	OSA-SH-212DM5 , 600M	12VDC	OSA-SH-212DM5	d
8-1440001-1	OSA-SH-212DM5 , 600	12VDC	OSA-SH-212DM5	c
7-1440001-9	OSA-SH-209DM5 , 600	9VDC	OSA-SH-209DM5	b
7-1440004-7	OSA-SH-205DM5 , 600	5VDC	OSA-SH-205DM5	a

RELAY TYPE

AR	AR	AR	AR	AR			UV RESIN	UV SEAL	ITEM
AR	AR	AR	AR	AR			EPOXY RESIN	SEAL	14
1	1	1	1	1	94V-0		PBT	CASE	13
1	1	1	1	1	94V-0		PA66	CARD	12
2	2	2	2	2			Ag ALLOY	STATIONARY CONTACT	11
2	2	2	2	2			Cu ALLOY	STATIONARY TERMINAL	10
2	2	2	2	2			Ag ALLOY	MOVABLE CONTACT	9
2	2	2	2	2			Cu ALLOY	MOVABLE SPRING	8
1	1	1	1	1		Cu-Ni PLATED	STEEL	ARMATURE	7
1	1	1	1	1		Cu-Ni PLATED	STEEL	CORE	6
1	1	1	1	1			PBS	HINGE SPRING	5
1	1	1	1	1		Ni PLATED	STEEL	YOKE	4
AR	AR	AR	AR	AR			UEW	MAGNETIC WIRE	3
2	2	2	2	2			CP WIRE	COIL TERMINAL	2
1	1	1	1	1	94V-0		PBT	BOBBIN	1
e	d	c	b	a	INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
 IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
 SHOULD BE CONTACTED FOR THE LATEST REVISION.

DWN
CHK
APVD

tyco Electronics Tyco Electronics EC K.K.
 Tochigi, Japan

NAME
 OSA-SH-DM5, 600 , 600M

PRODUCT SPEC
 製品規格 -

APPLICATION SPEC
 取付通用規格 -

WEIGHT -

SIZE A3 **CAGE CODE** 00779 **DRAWING NO** 7-1440004-7 **RESTRICTED TO** -

CUSTOMER DRAWING **SCALE** 4 : 1 **SHEET** 2 OF 2 **REV** D

DIMENSIONS:
 單位: 耗
 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL
 材料 -

FINISH
 仕上 -