Pushing Performance

Han High Temp 24B-HSM-DL-2xM32

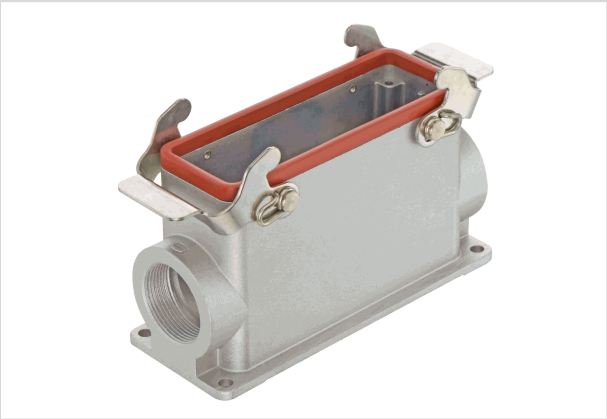


Image is for illustration purposes only. Please refer to product description.

Part number	19 62 824 0292
Specification	Han High Temp 24B-HSM-DL-2xM32
HARTING eCatalogue	https://b2b.harting.com/19628240292

Identification

Category	Hoods/Housings
Series of hoods/housings	Han® High Temp
Type of hood/housing	Surface mounted housing
Type	High construction

Version

Locking type	Double locking lever
Size	24 B
Version	Side entry
Cable entry	2x M32

Technical characteristics

Limiting temperature	-40 ... +200 °C With Han® High Temp components
Degree of protection acc. to IEC 60529	IP65

Material properties

Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	FPM
Colour (seal)	Red
Material (locking)	Stainless steel
RoHS	compliant

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com

Pushing Performance

Material properties

ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Commercial data

Packaging size	1
Net weight	480 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com