

FEATURES

- ◆ High Efficiency up to 81%
- ◆ 6KVDC Isolation
- ◆ DIP Package
- ◆ Low Isolation capacitance
- ◆ Temperature Range -40°C to +85°C
- ◆ No Heat Sink Require
- ◆ Internal SMD Construction
- ◆ No External Component Required
- ◆ Continuous short circuit protection
- ◆ Industry Standard Pinout
- ◆ RoHS Compliance

MODEL SELECTION

G^① 05^② 05^③ X^④ D^⑤ -2W^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Package Style
- ⑤ DIP Package
- ⑥ Rated Power

APPLICATIONS

The G_XD-2W & H_XD-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 6000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanded.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.



CE REACH

MICRODC reserves the copyright

PRODUCT PROGRAM

| Part Number | Input | | Output | | | Efficiency (% Typ) | Certificate | | |
|-------------|---------------|-----------|---------------|-------------|----------|--------------------|-------------|----|----|
| | Voltage (VDC) | | Voltage (VDC) | Current (A) | | | | | |
| | Nominal | Range | | Max | Min | | | | |
| H0505XD-2W | 5 | 4.5-5.5 | 5 | 400 | 40 | 75 | UL | | |
| H0509XD-2W | | | 9 | 222 | 23 | 76 | UL | | |
| H0512XD-2W | | | 12 | 167 | 17 | 78 | UL | | |
| H0515XD-2W | | | 15 | 133 | 13 | 77 | UL | | |
| G0505XD-2W | | | ± 5 | ± 200 | ± 20 | 75 | UL | | |
| G0509XD-2W | | | ± 9 | ± 111 | ± 12 | 77 | UL | | |
| G0512XD-2W | | | ± 12 | ± 84 | ± 9 | 79 | UL | | |
| G0515XD-2W | | | ± 15 | ± 67 | ± 7 | 78 | UL | | |
| H1205XD-2W | | | 12 | 10.8-13 | 5 | 400 | 40 | 75 | UL |
| H1209XD-2W | | | | | 9 | 222 | 23 | 78 | UL |
| H1212XD-2W | 12 | 167 | | | 17 | 80 | UL | | |
| H1215XD-2W | 15 | 133 | | | 14 | 78 | UL | | |
| G1205XD-2W | ± 5 | ± 200 | | | ± 20 | 76 | UL | | |
| G1209XD-2W | ± 9 | ± 111 | | | ± 12 | 78 | UL | | |
| G1212XD-2W | ± 12 | ± 84 | | | ± 9 | 80 | UL | | |
| G1215XD-2W | ± 15 | ± 67 | | | ± 7 | 78 | UL | | |
| H2405XD-2W | 24 | 21.6-26.4 | | | 5 | 400 | 40 | 77 | |
| H2409XD-2W | | | | | 9 | 222 | 23 | 78 | |
| H2412XD-2W | | | 12 | 167 | 17 | 81 | | | |
| H2415XD-2W* | | | 15 | 133 | 14 | 80 | | | |
| G2405XD-2W* | | | ± 5 | ± 200 | ± 20 | 77 | | | |
| G2409XD-2W* | | | ± 9 | ± 111 | ± 12 | 78 | | | |
| G2412XD-2W* | | | ± 12 | ± 84 | ± 9 | 81 | | | |
| G2415XD-2W* | | | ± 15 | ± 67 | ± 7 | 80 | | | |

*Designing.

Note: The G_XD-1W/H_XD-1W series also are available in our company.

ISOLATION SPECIFICATIONS

| Item | Test conditions | Min. | Typ. | Max | Unit |
|-----------------------|---------------------------------|------|------|-----|------------|
| Isolation voltage | Tested for 1 minute and 1mA max | 6000 | | | VDC |
| Isolation resistance | Test at 500VDC | 1000 | | | M Ω |
| Isolation capacitance | | | 3.5 | | PF |



COMMON SPECIFICATIONS

| Item | Test conditions | Min | Typ. | Max | Unit |
|--------------------------|--------------------------------|---------------------|------|-----|---------|
| Storage humidity | | | | 95 | % |
| Operating temperature | | -40 | | 85 | °C |
| Storage temperature | | -55 | | 125 | |
| Temp. rise at full load | | | 15 | 30 | |
| Lead temperature | 1.5mm from case for 10 seconds | | | 300 | |
| Short circuit protection | | Continuous | | | |
| Cooling | | Free air convection | | | |
| Case material | | Plastic(UL94-V0) | | | |
| MTBF | | 3500 | | | K hours |
| Weight | | | 8.2 | | g |

| OUTPUT SPECIFICATIONS | | | | | |
|-------------------------|--------------------------|------------------------------|------|------|-------|
| Item | Test conditions | Min. | Typ. | Max. | Units |
| Output power | | 0.2 | | 2 | W |
| Line regulation | For Vin change of 1% | | | ±1.2 | |
| Load regulation | 10% to 100% load | 5V output | 10 | 15 | % |
| | | 9V output | 8.3 | 15 | |
| | | 12V output | 6.8 | 15 | |
| | | 15V output | 6.3 | 15 | |
| Output voltage accuracy | | See tolerance envelope graph | | | |
| Temperature drift | 100% full load | | | 0.03 | %/°C |
| Ripple & Noise* | 20MHz Bandwidth | | 150 | 250 | mVp-p |
| Switching frequency | Full load, nominal input | 5V input | 35 | | KHz |
| | | 12V,24V input | 50 | | |


*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note: Dual output models unbalanced load: ±5%

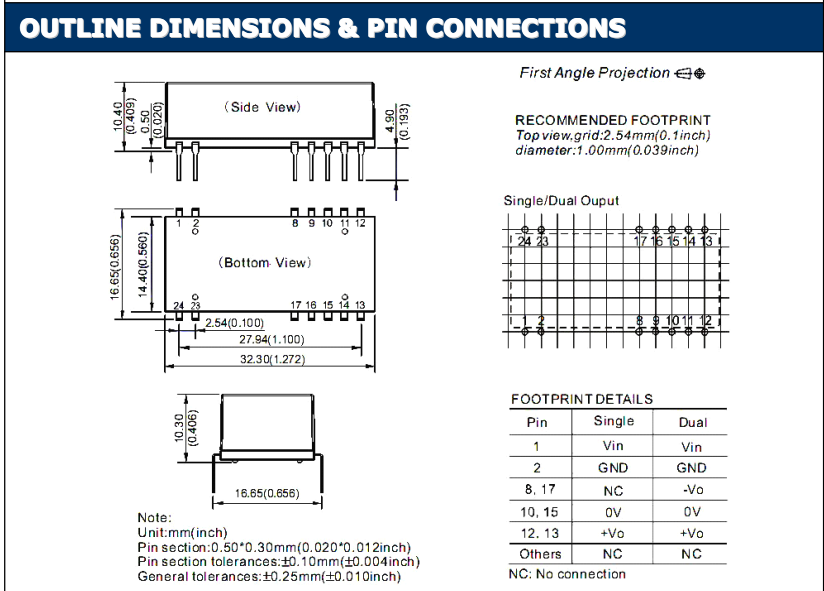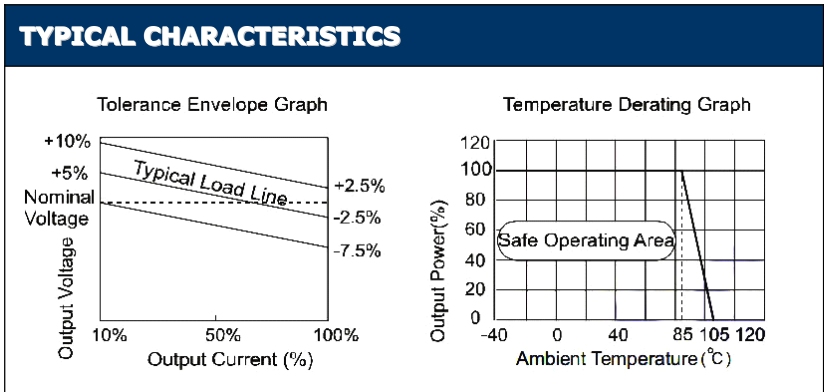

Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

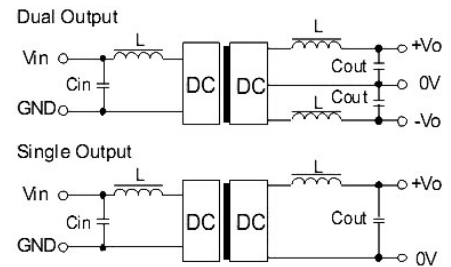

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).


EXTERNAL CAPACITOR TABLE (Table 1)

| Vin (VDC) | Cin (μF) | Single Vout (VDC) | Cout (μF) | Dual Vout (VDC) | Cout (μF) |
|-----------|----------|-------------------|-----------|-----------------|-----------|
| 5 | 4.7 | 5 | 10 | ±5 | 4.7 |
| 12 | 2.2 | 9 | 4.7 | ±9 | 2.2 |
| 24 | 1 | 12 | 2.2 | ±12 | 1 |
| -- | -- | 15 | 1 | ±15 | 1 |

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

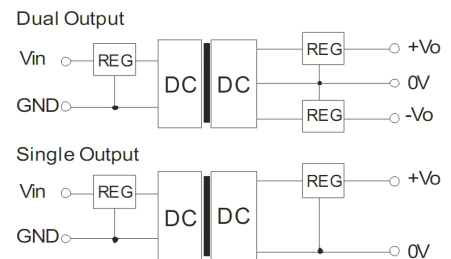

(Figure 2)

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

No parallel connection or plug and play.

Note:

1. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. Only typical models listed, other models may be different, please contact our technical person for more details.
3. Operation under minimum load will not damage the converter; However, they may not meet all specification listed.

MICRODC
Professional Power Module

Microdc Professional Power Module, Inc.
 Tel: 0086-20-86000646 E-mail: tech@microdc.cn
 Website: http://www.microdc.cn

RoHS COMPLIANT INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.