



Major League Electronics .079 cl Board Stacker Socket Strips - Custom - using .020"sq. pins

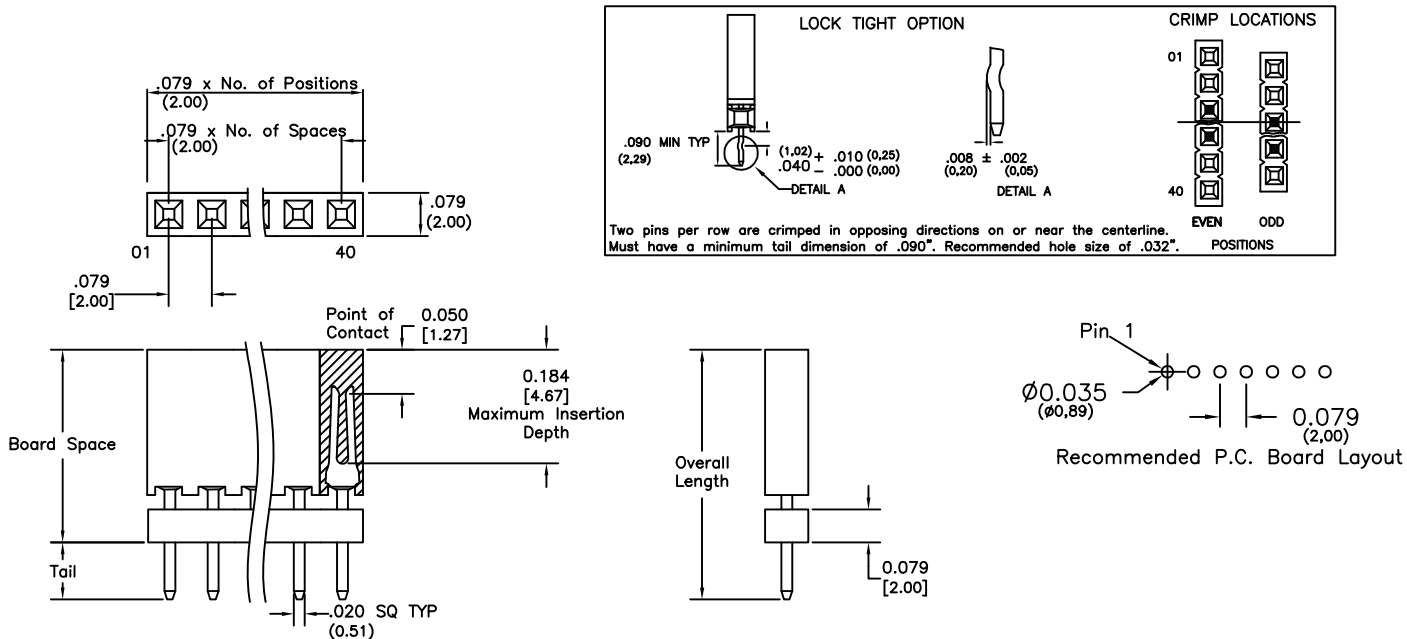

Length (L) – Board Space (B) = Tail Length (T)

Tails may be clipped to achieve desired pin length

Ordering Information



Pins Per Row
01 - 40

Row Specification
S = Single Row

Lead Free

Polarized Position
Leave blank if not needed
If required, specify empty pin position, e.g. 012 for Pin 12

Lock Tight "LT" Option
Leave blank if not needed
LT = With

Desired Board Space
Please specify
e.g. .100 (2.54) = 100

Pin Options					
Overall Length	Max. Tail length	Max. Board Space			
.414	10.52mm	.104	2.64mm	.364	9.25mm 04
.458	11.63mm	.148	3.76mm	.408	10.36mm 05
.534	13.56mm	.224	5.69mm	.484	12.29mm 06
.692	17.58mm	.382	9.70mm	.642	16.31mm 07
.850	21.59mm	.540	13.72mm	.800	20.32mm 08

Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Mates with:

- BSTC,
- BSTCM,
- BSTCR,
- BSTCRSM,
- BSTS,
- TBSTC,
- TBSTCM,
- TBSTS,
- TBSTCR,
- TSHC,
- TSHCR,
- TSHCRE,
- TSHCRSM,
- TSHR,
- TSHRE,
- TSHS,
- TSHSCM,
- TTSHC,
- TTSHCR,
- TTSHCRE,
- TTSHR,
- TTSHRE,
- TTSHS,
- TTSHSM

Specifications

Insertion Force - Single Contact only - H Plating:

4oz. (1,11N) avg with .079 (2,00mm) sq. pin

Withdrawal Force - Single Contact only - H Plating:

3oz. (0,83N) avg with .079 (2,00mm) sq. pin

Current Rating: 2.0 Ampere

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 10 mΩ Max.

Operating Temperature: -40°C to + 105°C

Max. Process Temperature:

Peak: 260°C up to 10 secs.

Process: 230°C up to 60 secs.

Wave: 260°C up to 6 secs.

Manual Solder: 350°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze

Insulator Material: Nylon 6T

Plating: Au or Sn over 50µ" (1,27) Ni

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

BSSQC-2-S SERIES

.079cl Board Stacker Socket Strips

19 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020

ANGLES
±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1