
MTP PressFit IGBT Power Module
Primary Dual Forward

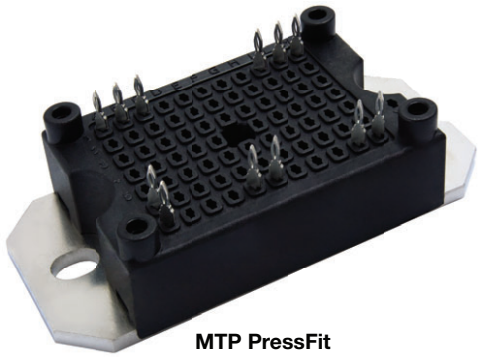

MTP PressFit
(package example)

FEATURES

- Buck PFC stage with warp 3 IGBT and FRED Pt® hyperfast diode
- Integrated thermistor
- Isolated baseplate
- Very low stray inductance design for high speed operation
- Ultrafast switching IGBT
- PressFit pins locking technology. Patent # US.263.820 B2
- Designed and qualified for industrial level
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free

RoHS COMPLIANT

BENEFITS

- Lower conduction losses and switching losses
- Optimized for welding, UPS, and SMPS applications
- PressFit pins technology
- Direct mounting to heatsink

PRIMARY CHARACTERISTICS	
IGBT, T_J = 150 °C	
V_{CES}	600 V
$V_{CE(on)}$ at 25 °C at 80 A	2.11 V
I_C at 80°C	96 A
FRED Pt® AP DIODE, T_J = 150 °C	
V_{RRM}	600 V
$I_{F(DC)}$ at 80 °C	11 A
V_F at 25 °C at 5 A	1.1 V
FRED Pt® CHOPPER DIODE, T_J = 150 °C	
V_R	600 V
$I_{F(DC)}$ at 80 °C	22 A
V_F at 25 °C at 60 A	2.07 V
Speed	30 kHz to 150 kHz
Package	MTP
Circuit configuration	Dual forward

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
IGBT	Collector to emitter voltage	V_{CES}		600	V
	Gate to emitter voltage	V_{GE}		± 20	V
	Maximum continuous collector current at V_{GE} = 15 V, T_J = 150 °C maximum	I_C	T_C = 25 °C	138	A
			T_C = 80 °C	96	
	Pulse collector current	I_{CM} (1)		330	
	Clamped inductive load current	I_{LM}		330	
	Maximum power dissipation	P_D	T_C = 25 °C	543	W
Antiparallel diode	Repetitive peak reverse voltage	V_{RRM}		600	V
	Maximum continuous forward current T_J = 150 °C maximum	$I_{F(DC)}$	T_C = 25 °C	17	A
			T_C = 80 °C	11	
	Maximum non-repetitive peak current	I_{FSM}	10 ms sine or 6 ms rectangular pulse, T_J = 25 °C	60	
	Maximum power dissipation	P_D	T_C = 25 °C	24	W

PATENT(S): www.vishay.com/patents
This Vishay product is protected by one or more United States and International patents.

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
Chopper diode	Repetitive peak reverse voltage	V_{RRM}		600	V
	Maximum continuous forward current T_J = 150 °C maximum	I_F	T_C = 25 °C	33	A
			T_C = 80 °C	22	
	Maximum non-repetitive peak current	I_{FSM}	10 ms sine or 6 ms rectangular pulse, T_J = 25 °C	135	
	Maximum power dissipation	P_D	T_C = 25 °C	57	W
	Maximum operating junction temperature	T_J		150	°C
	Storage temperature range	T_{Stg}		-40 to +150	
	Isolation voltage	V_{ISOL}	T_J = 25 °C, all terminals shorted, f = 50 Hz, t =1 s	3500	V

Notes

- Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur

(1) V_{CC} = 300 V, V_{GE} = 15 V, L = 500 µH, R_g = 4.7 Ω, T_J = 150 °C

ELECTRICAL SPECIFICATIONS (T_J = 25 °C unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
IGBT	Collector to emitter breakdown voltage	BV_{CES}	V_{GE} = 0 V, I_C = 1.5 mA	600	-	-	V
	Temperature coefficient of breakdown voltage	$\Delta V_{BR(CES)}/\Delta T_J$	I_C = 1.0 mA (25 °C to 125 °C)	-	0.6	-	V/°C
	Collector to emitter voltage	$V_{CE(on)}$	V_{GE} 15 V, I_C = 80 A	-	2.11	2.48	V
			V_{GE} = 15 V, I_C = 80 A, T_J = 125 °C	-	2.43	-	
	Gate threshold voltage	$V_{GE(th)}$	V_{CE} = V_{GE}, I_C = 750 µA	3.2	4.4	6.2	V
	Temperature coefficient of threshold voltage	$\Delta V_{GE(th)}/\Delta T_J$	V_{CE} = V_{GE}, I_C = 1.0 mA (25 °C to 125 °C)	-	-12	-	mV/°C
	Forward transconductance	g_{fe}	V_{CE} = 20 V, I_C = 80 A	-	97	-	S
	Transfer characteristics	V_{GE}	V_{CE} = 20 V, I_C = 80 A	-	6.6	-	V
	Collector to emitter leakage current	I_{CES}	V_{GE} = 0 V, V_{CE} = 600 V	-	8	100	µA
			V_{GE} = 0 V, V_{CE} = 600 V, T_J = 125 °C	-	0.1	-	mA
	Gate to emitter leakage	I_{GES}	V_{GE} = ± 20 V	-	-	± 250	nA
AP diode	Blocking voltage	BV_{RRM}	I_R = 1.5 mA	600	-	-	V
	Forward voltage drop	V_{FM}	I_F = 5 A	-	1.1	1.27	V
			I_F = 5 A, T_J = 125 °C	-	0.96	-	
Chopper diode	Forward voltage drop	V_{FM}	I_F = 60 A	-	2.07	2.53	V
			I_F = 60 A, T_J = 125 °C	-	1.87	-	
	Blocking voltage	BV_{RM}	I_R = 100 µA	600	-	-	
	Reverse leakage current	I_{RM}	V_{RRM} = 600 V	-	2	70	µA
			V_{RRM} = 600 V, T_J = 125 °C	-	12	-	

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SWITCHING CHARACTERISTICS (T_J = 25 °C unless otherwise noted)							
	PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
PFC IGBT	Total gate charge (turn-on)	Q_g	I_C = 60 A, V_{CC} = 400 V, V_{GE} = 15 V	-	540	-	nC
	Gate to emitter charge (turn-on)	Q_{ge}		-	84	-	
	Gate to collector charge (turn-on)	Q_{gc}		-	192	-	
	Turn-on switching loss	E_{on}	I_C = 150 A, V_{CC} = 300 V, V_{GE} = 15 V, R_g = 4.7 Ω, L = 500 µH, T_J = 25 °C (1)	-	0.51	-	mJ
	Turn-off switching loss	E_{off}		-	2.66	-	
	Total switching loss	E_{tot}		-	3.17	-	
	Turn-on delay time	$t_{d(on)}$		-	173	-	ns
	Rise time	t_r		-	79	-	
	Turn-off delay time	$t_{d(off)}$		-	374	-	
	Fall time	t_f		-	66	-	
	Turn-on switching loss	E_{on}	I_C = 150 A, V_{CC} = 300 V, V_{GE} = 15 V, R_g = 4.7 Ω, L = 500 µH, T_J = 125 °C (1)	-	0.66	-	mJ
	Turn-off switching loss	E_{off}		-	2.75	-	
	Total switching loss	E_{tot}		-	3.41	-	
	Turn-on delay time	$t_{d(on)}$		-	167	-	ns
	Rise time	t_r		-	80	-	
	Turn-off delay time	$t_{d(off)}$		-	389	-	
	Fall time	t_f		-	69	-	
	Input capacitance	C_{ies}	V_{GE} = 0 V, V_{CC} = 30 V, f = 1 MHz	-	14 020	-	pF
	Output capacitance	C_{oes}		-	1010	-	
	Reverse transfer capacitance	C_{res}		-	174	-	
	Reverse bias safe operating area	RBSOA	I_C = 330 A, V_{CC} = 300 V, V_P = 600 V, R_g = 4.7 Ω, V_{GE} = 15 V, L = 500 µH, T_J = 150 °C	Full square			

Note

(1) Energy losses include “tail” and diode reverse recovery

RECOVERY PARAMETER (T_J = 25 °C unless otherwise noted)							
	PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
AP diode	Peak reverse recovery current	I_{rr}	I_F = 10 A, dI/dt = 200 A/µs, V_{rr} = 200 V	-	10	-	A
	Reverse recovery time	t_{rr}		-	104	-	ns
	Reverse recovery charge	Q_{rr}		-	537	-	nC
Chopper diode	Peak reverse recovery current	I_{rr}	I_F = 50 A, dI/dt = 200 A/µs, V_{rr} = 200 V	-	4.7	-	A
	Reverse recovery time	t_{rr}		-	73	-	ns
	Reverse recovery charge	Q_{rr}		-	171	-	nC
	Peak reverse recovery current	I_{rr}	I_F = 50 A, dI/dt = 200 A/µs, V_{rr} = 200 V, T_J = 125 °C	-	10.3	-	A
	Reverse recovery time	t_{rr}		-	140	-	ns
	Reverse recovery charge	Q_{rr}		-	716	-	nC

THERMISTOR ELECTRICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Resistance	R	T_J = 25 °C	-	30 000	-	Ω
B value	B	T_J = 25 °C/T_J = 85 °C	-	4000	-	K

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

THERMAL AND MECHANICAL SPECIFICATIONS						
	PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS
IGBT	Junction to case IGBT thermal resistance	R_{thJC}	-	-	0.23	°C/W
AP FRED Pt	Junction to case diode thermal resistance		-	-	5.1	
FRED Pt	Junction to case diode thermal resistance		-	-	2.2	
	Case to sink, flat, greased surface per module	R_{thCS}	-	0.06	-	°C/W
	Mounting torque ± 10 % to heatsink (1)		-	-	4	Nm
	Approximate weight		-	65	-	g

Note

(1) A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound

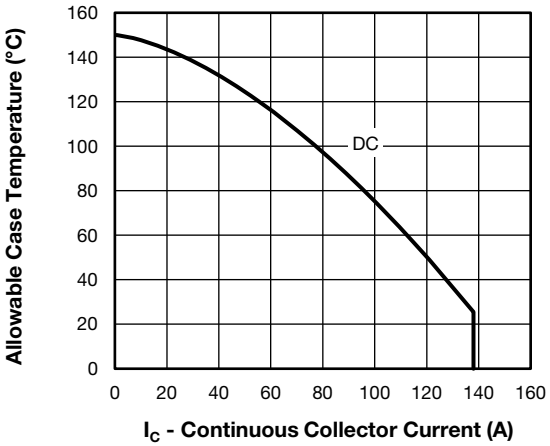


Fig. 1 - Allowable Case Temperature vs. Continuous Collector Current (Maximum IGBT Continuous Collector Current vs. Case Temperature)

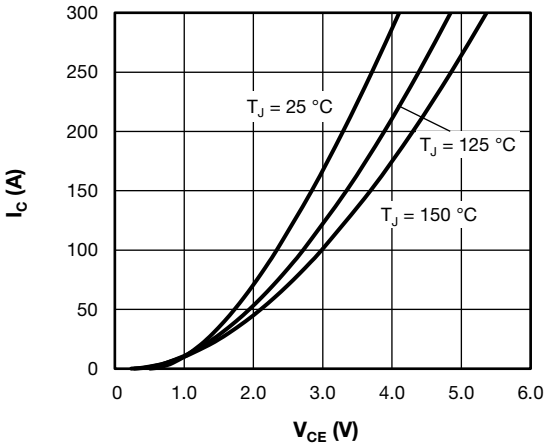


Fig. 3 - I_C vs. V_{CE}
(Typical IGBT Output Characteristics, V_{GE} = 15 V)

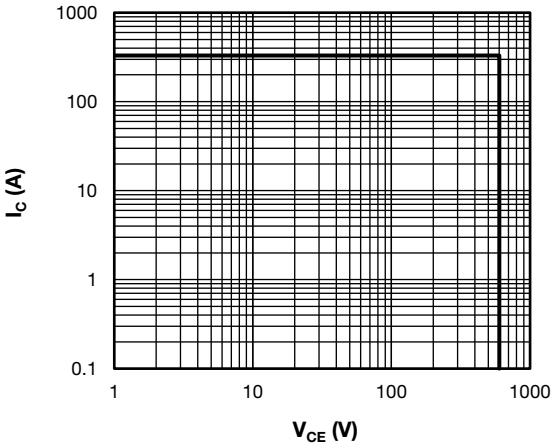


Fig. 2 - I_C vs. V_{CE}
(IGBT Reverse BIAS SOA, T_J = 150 °C, V_{GE} = 15 V)

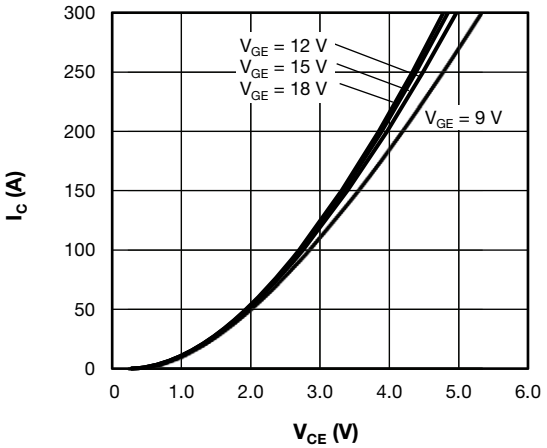


Fig. 4 - I_C vs. V_{CE}
(Typical IGBT Output Characteristics, T_J = 125 °C)

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

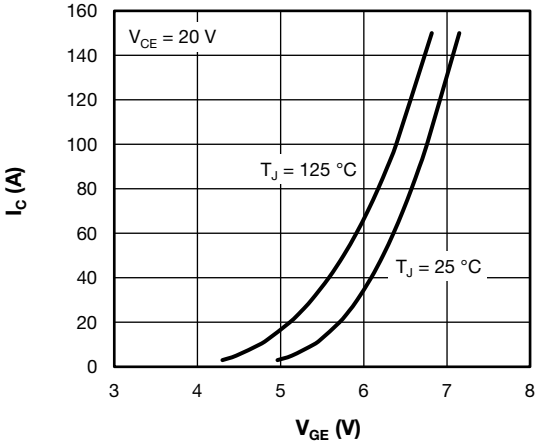


Fig. 5 - I_C vs. V_{GE}
(Typical IGBT Transfer Characteristics)

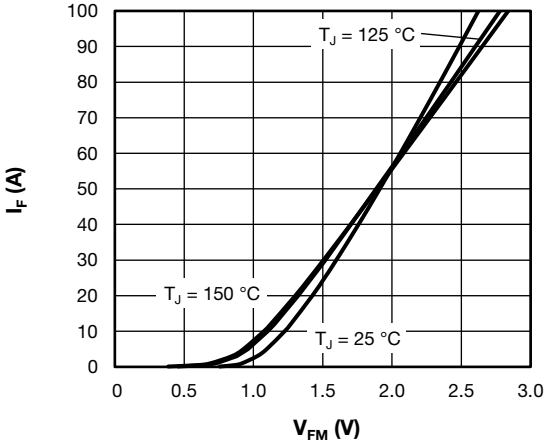


Fig. 8 - I_F vs. V_{FM}
(Typical Antiparallel Diode Forward Characteristics)

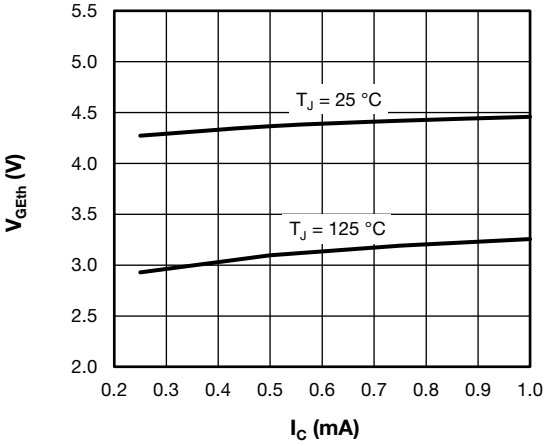


Fig. 6 - V_{GEth} vs. I_C
(Typical IGBT Gate Threshold Voltage)

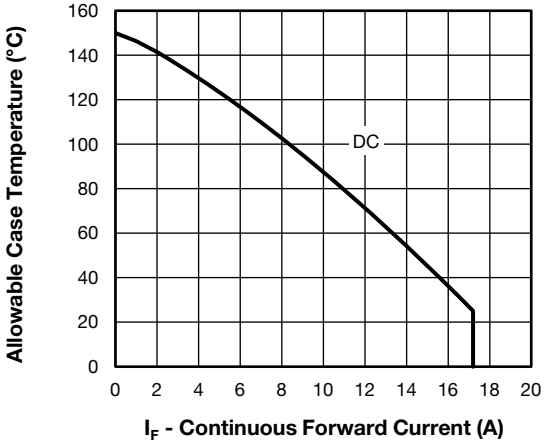


Fig. 9 - Allowable Case Temperature vs. Continuous Forward Current (Maximum Antiparallel Diode Continuous Forward Current vs. Case Temperature)

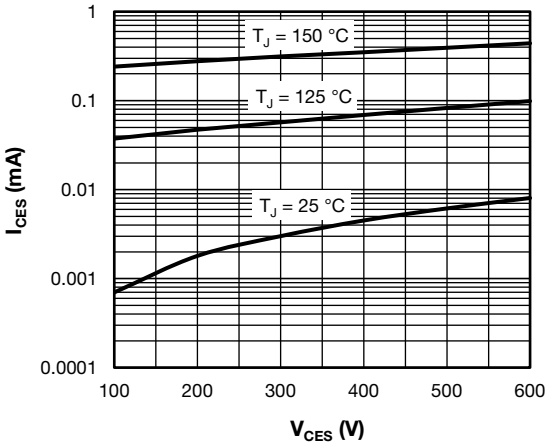


Fig. 7 - I_{CES} vs. V_{CES}
(Typical IGBT Zero Gate Voltage Collector Current)

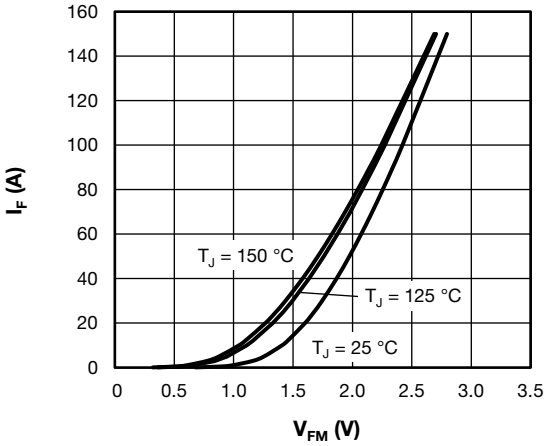


Fig. 10 - I_F vs. V_{FM}
(Typical Chopper Diode Forward Characteristics)

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

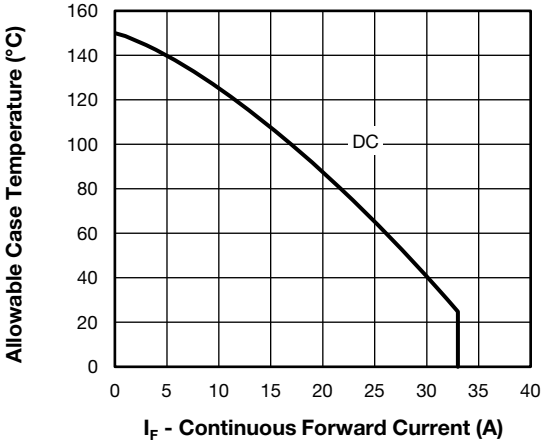


Fig. 11 - Allowable Case Temperature vs. Continuous Forward Current (Maximum Chopper Diode Continuous Forward Current vs. Case Temperature)

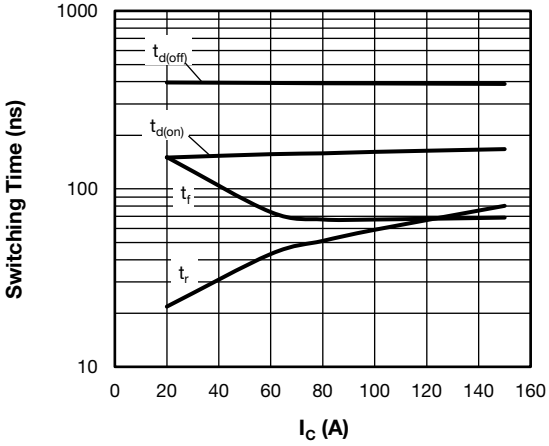


Fig. 14 - Switching Time vs. I_C
(Typical IGBT Switching Time vs. I_C)
T_J = 125 °C, V_{CC} = 300 V, R_g = 4.7 Ω, V_{GE} = 15 V, L = 500 µH

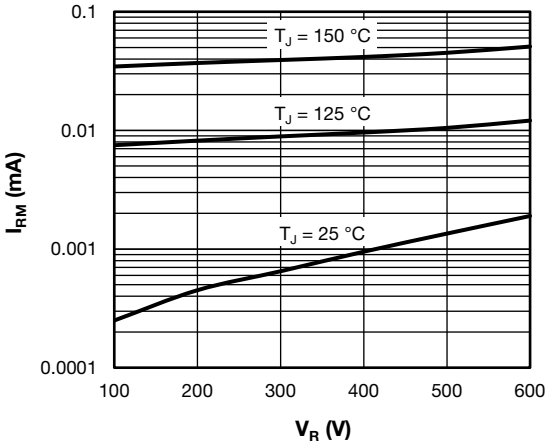


Fig. 12 - I_{RM} vs. V_R
(Typical Chopper Diode Reverse Leakage Current)

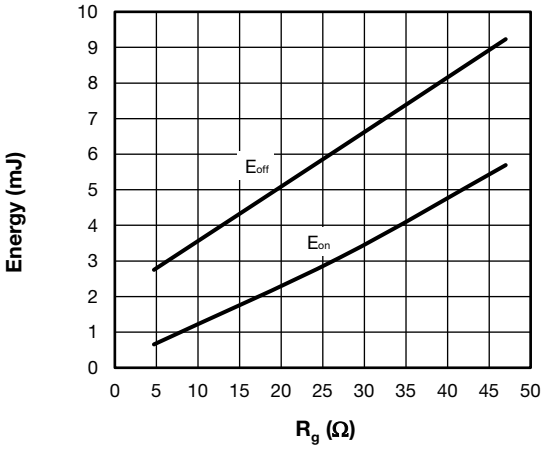


Fig. 15 - Energy Loss vs. R_g
(Typical IGBT Energy Loss vs. R_g)
T_J = 125 °C, V_{CC} = 300 V, I_C = 150 A, V_{GE} = 15 V, L = 500 µH

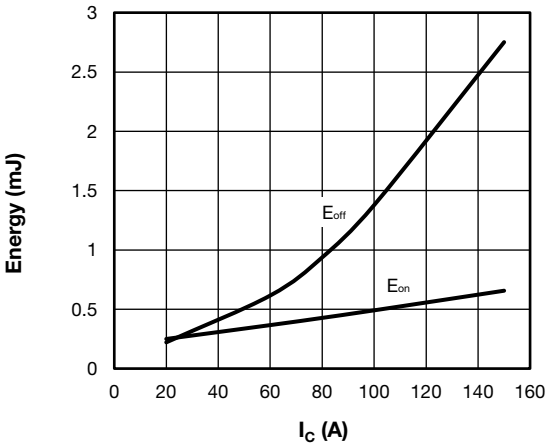


Fig. 13 - Energy Loss vs. I_C
(Typical IGBT Energy Loss vs. I_C)
T_J = 125 °C, V_{CC} = 300 V, R_g = 4.7 Ω, V_{GE} = 15 V, L = 500 µH

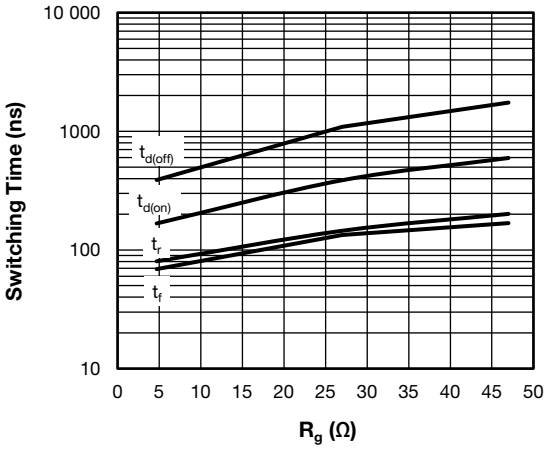


Fig. 16 - Switching Time vs. R_g
(Typical IGBT Switching Time vs. R_g)
T_J = 125 °C, V_{CC} = 300 V, I_C = 150 A, V_{GE} = 15 V, L = 500 µH

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

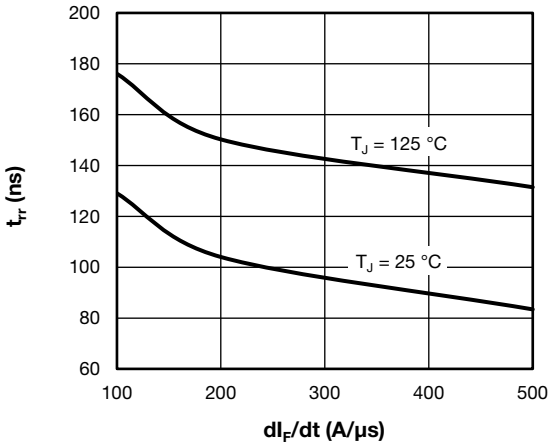


Fig. 17 - t_{rr} vs. dI_F/dt
(Typical Antiparallel Diode Reverse Recovery Time vs. dI_F/dt)
V_{rr} = 200 V, I_F = 10 A

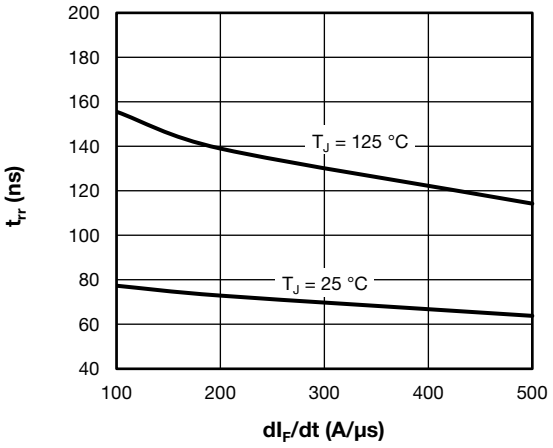


Fig. 20 - t_{rr} vs. dI_F/dt
(Typical Chopper Diode Reverse Recovery Time vs. dI_F/dt)
V_{rr} = 200 V, I_F = 50 A

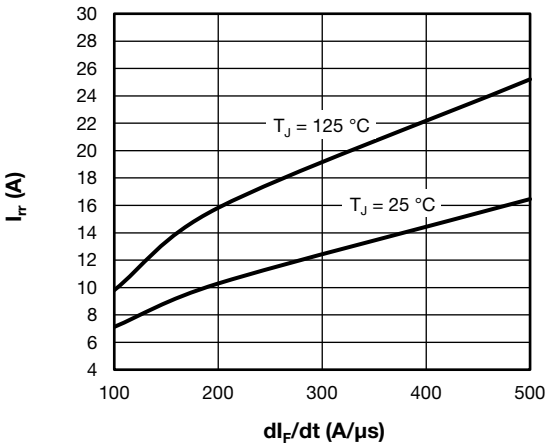


Fig. 18 - I_{rr} vs. dI_F/dt
(Typical Antiparallel Diode Reverse Recovery Current vs. dI_F/dt)
V_{rr} = 200 V, I_F = 10 A

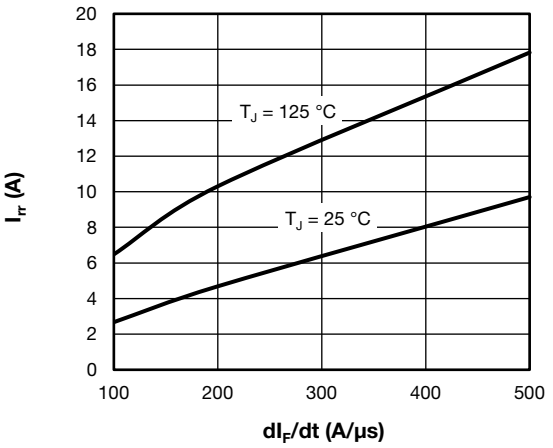


Fig. 21 - I_{rr} vs. dI_F/dt
(Typical Chopper Diode Reverse Recovery Current vs. dI_F/dt)
V_{rr} = 200 V, I_F = 50 A

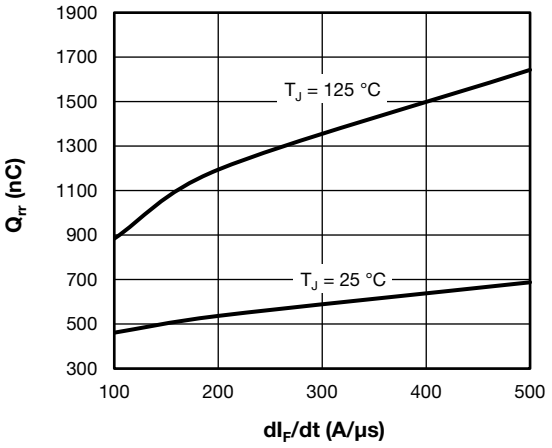


Fig. 19 - Q_{rr} vs. dI_F/dt
(Typical Antiparallel Diode Reverse Recovery Charge vs. dI_F/dt)
V_{rr} = 200 V, I_F = 10 A

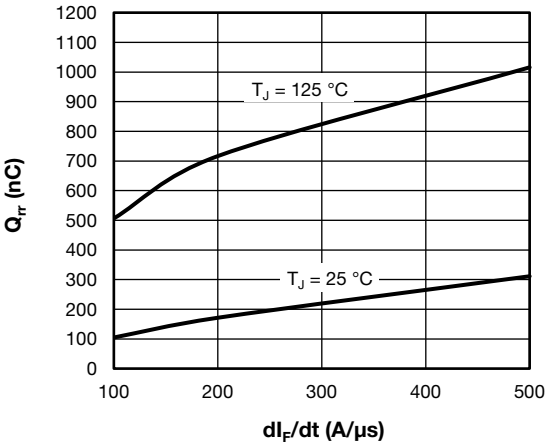


Fig. 22 - Q_{rr} vs dI_F/dt
(Typical Chopper Diode Reverse Recovery Charge vs. dI_F/dt)
V_{rr} = 200 V, I_F = 50 A

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

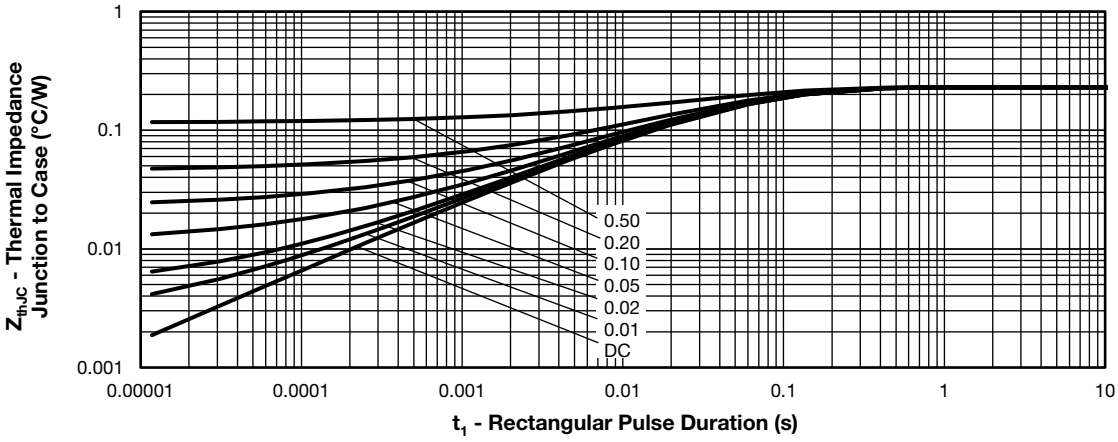


Fig. 23 - Z_{thJC} vs. t_1 Rectangular Pulse Duration
(Maximum Thermal Impedance Z_{thJC} Characteristics - (IGBT))


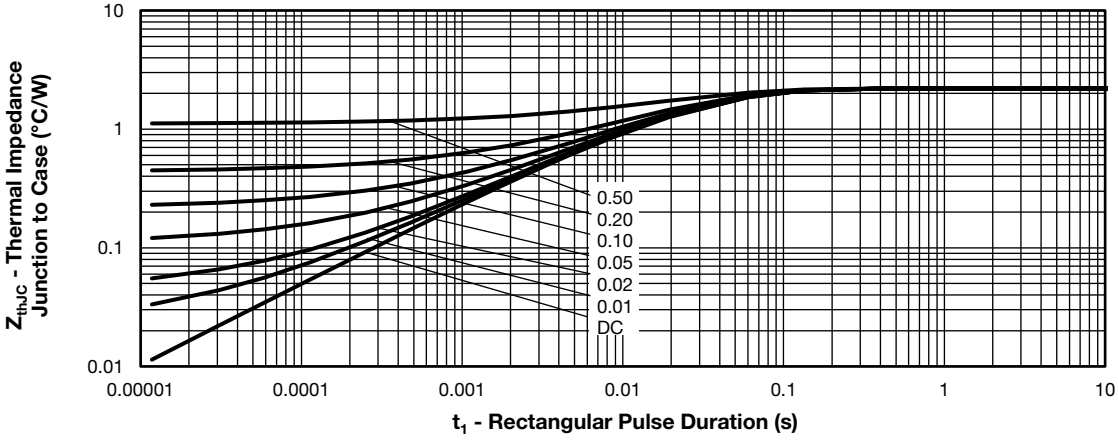


Fig. 24 - Z_{thJC} vs. t_1 Rectangular Pulse Duration
(Maximum Thermal Impedance Z_{thJC} Characteristics - (Chopper Diode))


CIRCUIT CONFIGURATION

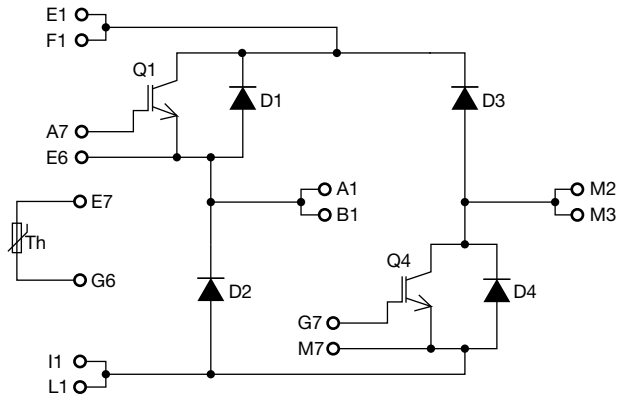

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ORDERING INFORMATION TABLE

Device code

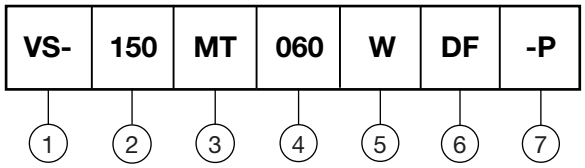


1	-	Vishay Semiconductors product
2	-	Current rating (150 = 150 A)
3	-	Essential part number (MT = MTP package)
4	-	Voltage code x 10 = voltage rating (example: 060 = 600 V)
5	-	Die IGBT technology (W = warp speed IGBT)
6	-	Circuit configuration (DF = dual forward)
7	-	Pinout code (PressFit pins)

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95567

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

MTP PressFit

DIMENSIONS in millimeters

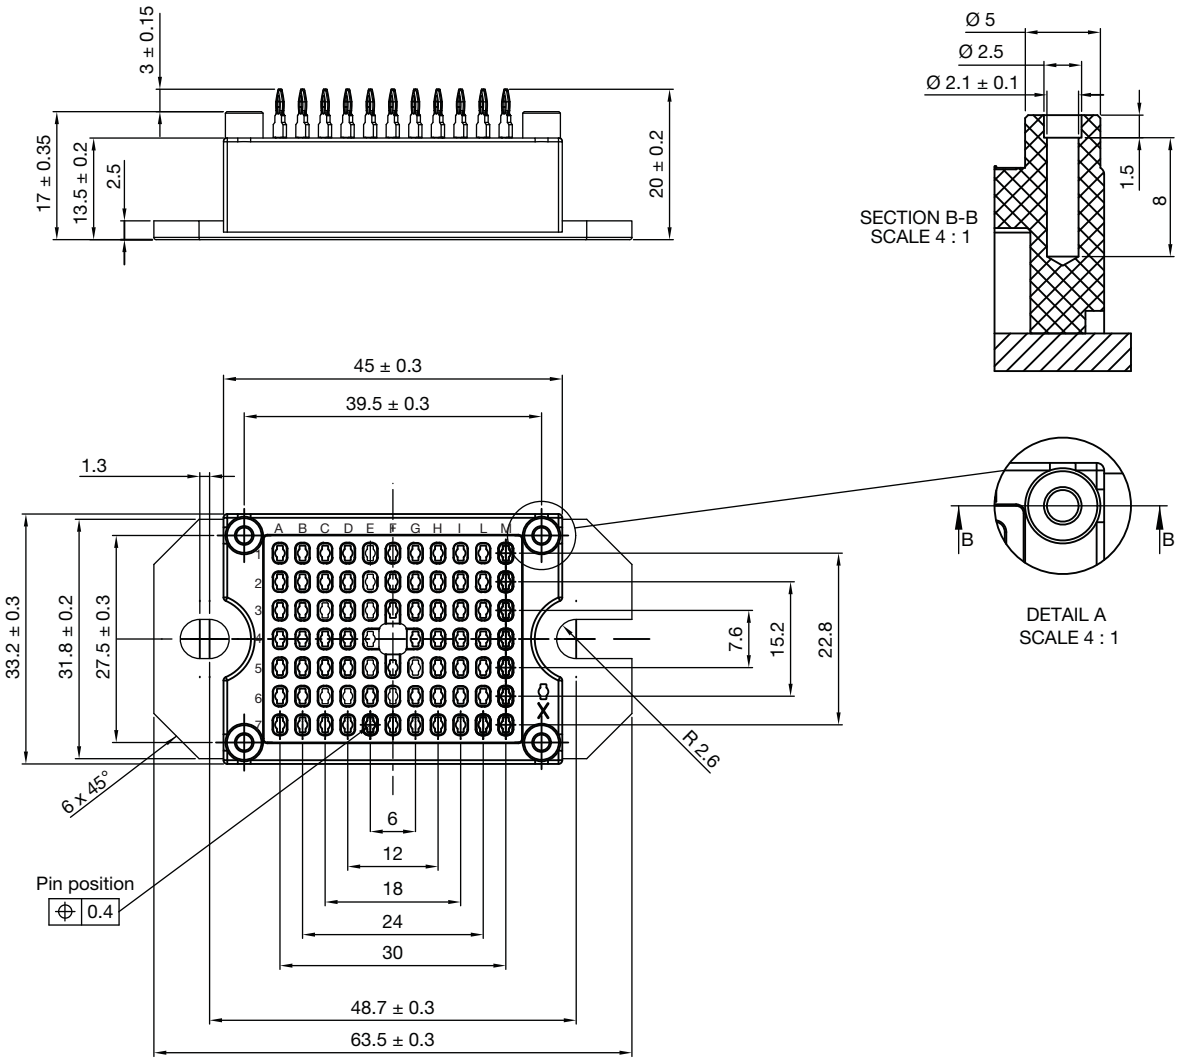

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2017 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED