
EVERLIGHT ELETCRONICS CO., LTD

Technical Data Sheet
Photocoupler

EL819 Series

Features:

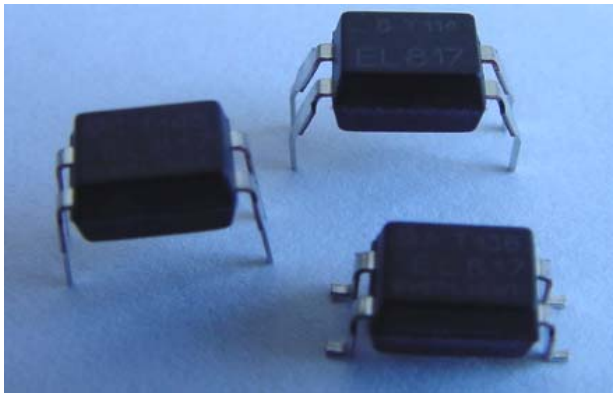

- Current transfer ratio
  (CTR:MIN.50% at IF =5mA ,VCE =5V)
- High isolation voltage between input and output (Viso=5000 V rms)
- Compact dual-in-line package
  EL819:1-channel type
- Pb free
- UL approved (No. E214129)
- VDE approved (No. 132249)
- SEMKO approved (No. 0143133/01-03)
- NEMKO approved (No. P00102385)
- DEMKO approved (No. 310352-04)
- FIMKO approved (No. FI 16763A2)
- CSA approved (No. 1143601)
- BSI approved (No. 8592 / 8593)
- Options available:
  - Leads with 0.4”(10.16mm) spacing (M Type)
  - Leads bends for surface mounting (S Type)
  - Tape and Reel of Type Ⅰ for SMD(Add”-TA” Suffix)
  - Tape and Reel of Type Ⅱ for SMD(Add”-TB” Suffix)
  - The tape is 16mm and is wound on a 33cm reel
- The product itself will remain within RoHS compliant version.

Applications

- Computer terminals
- System appliances, measuring instruments
- Registers, copiers, automatic vending machines
- Cassette type recorder
- Electric home appliances, such as fan heaters, etc.
- Signal transmission between circuits of different potentials and impedances


Technical Data Sheet
Photocoupler


Device Selection Guide


EL819 Series


Part No.	Chip Material	
	IR	PT
EL819	GaAlAs	Silicon

Package Dimensions

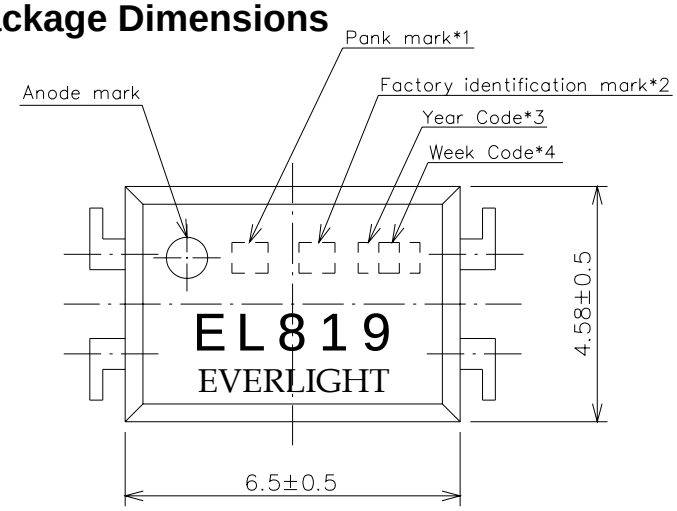

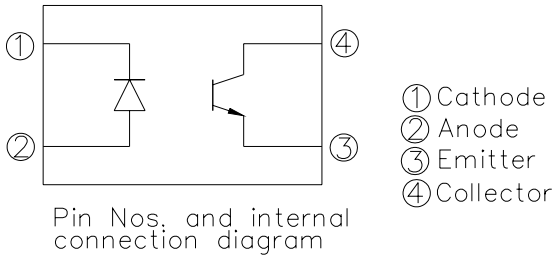

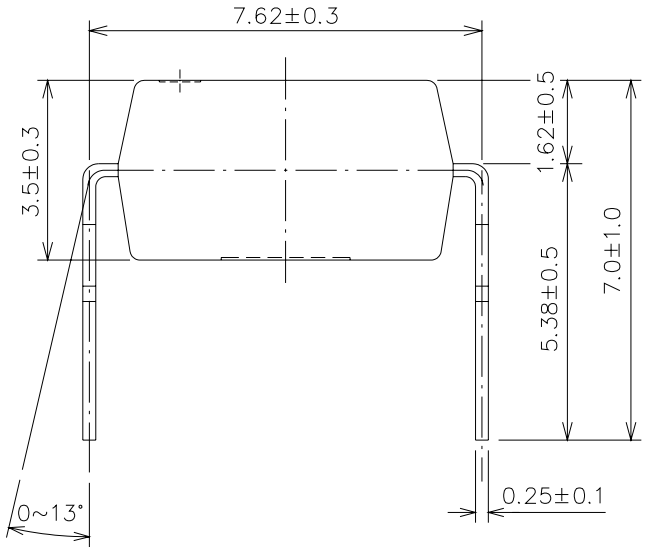

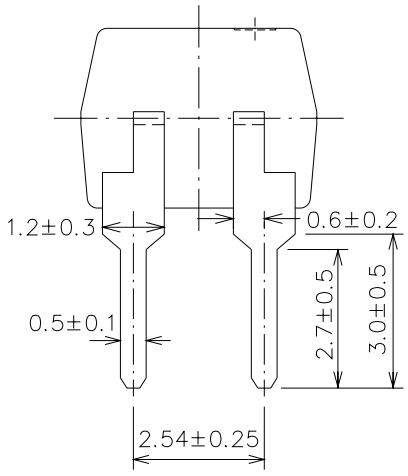


\

Technical Data Sheet
Photocoupler

EL819 Series

Package Dimensions

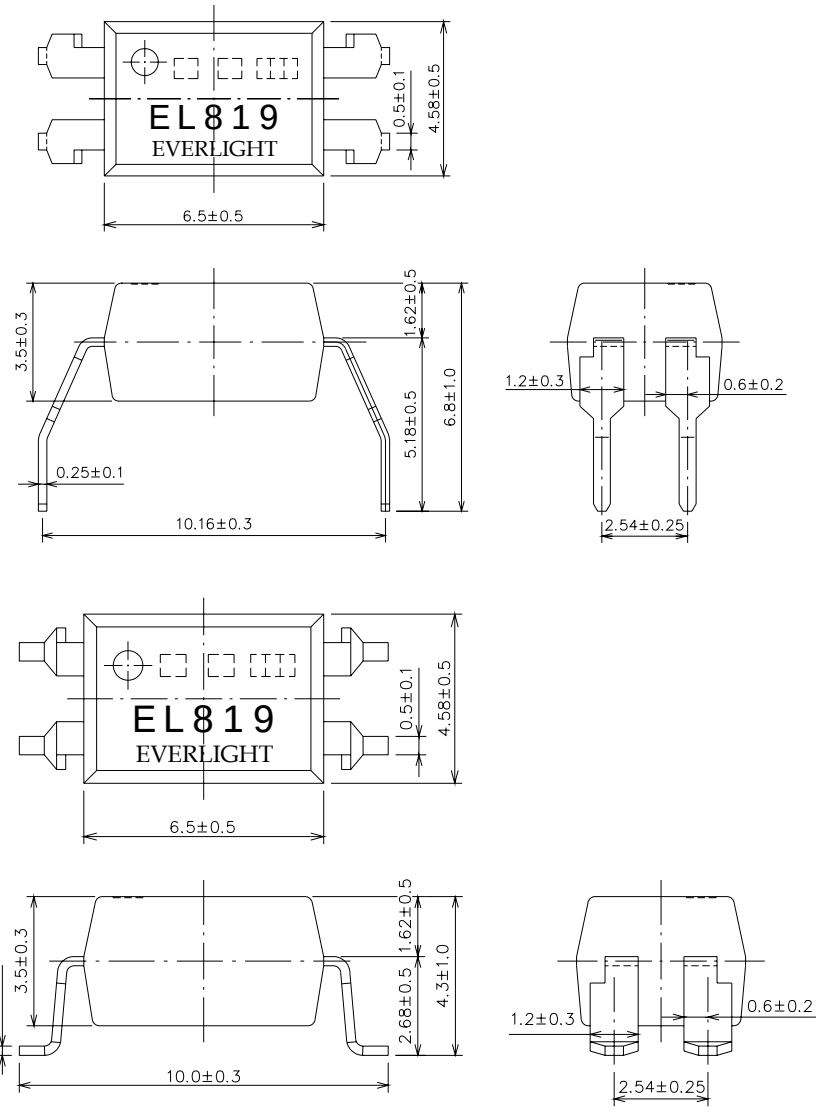

Notes:

1. Rank shall be or shall not be marked
2. Factory code shall be marked (T: Taiwan / C: China)
3. Year date code
4. 2-digit work week
5. All dimensions are in millimeters
6. Specifications are subject to change without notice

EL819 Series

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Power Dissipation	P	70	mW
Output	Collector Power Dissipation	P_C	150	mW
	Collector Current	I_C	50	mA
	Collector-Emitter Voltage	V_{CEO}	35	V
	Emitter-Collector Voltage	V_{ECO}	6	V
Total Power Dissipation		Ptot	200	mW
*1 Isolation Voltage		Viso	5000	V rms
Operating Temperature		Topr	-55~+110	°C
Storage Temperature		Tstg	-55~+125	°C
*2 Soldering Temperature		Tsol	260	°C

*1 AC for 1 minute, R.H= 40~ 60%RH

-Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector, emitter and base on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave

*2 For 10 seconds

Technical Data Sheet
Photocoupler

EL819 Series

Electro-Optical Characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward	V_F	-	1.2	1.4	V	I_F=20mA
	Reverse Current	I_R	-	-	10	uA	V_R=4V
	Terminal	Ct	-	30	250	pF	V=0,f=1kHz
Output	*Collector Dark current*	I_{CEO}	-	-	100	nA	V_{CE}=20V
	Collector-Emitter breakdown voltage	BV_{CEO}	35	-	-	V	Ic=0.1mA
Transfer Characteristics	Current Transfer ratio	CTR	50	-	400	%	**I_F=5mA ,V_{CE}=5V**
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	-	0.1	0.2	V	**I_F=20mA ,Ic=1 mA**
	Isolation resistance	R_{ISO}	5×10^{10}	10^{11}	-	**Ω**	**DC500V,40~60%R.H**
	Floation capacitance	Cf	-	0.6	1.0	pF	**V=0, f=1MHz**
	Cut-off frequency	fc	-	80	-	kHz	**V_{CE}=5V, I_C=2 mA R_L=100Ω, -3dB**
	Rise time	t_r	-	4	18	us	**V_{CE}=2V I_C=2mA,R_L=100Ω**
	Fall time	t_f	-	3	18	us	

Technical Data Sheet
Photocoupler

EL819 Series

Supplement

Rank Table of Current Transfer Ratio CTR

Model No.	Rank mark	CTR (%)	*Condition*
EL819		50 to 400	I_F = 5 mA V_{CE} = 5 V T_a = 25°C
EL819	L	50 to 100	
EL819	A	80 to 160	
EL819	B	130 to 260	
EL819	C	200 to 400	

Fig. 1 Forward Current vs. Ambient Temperature

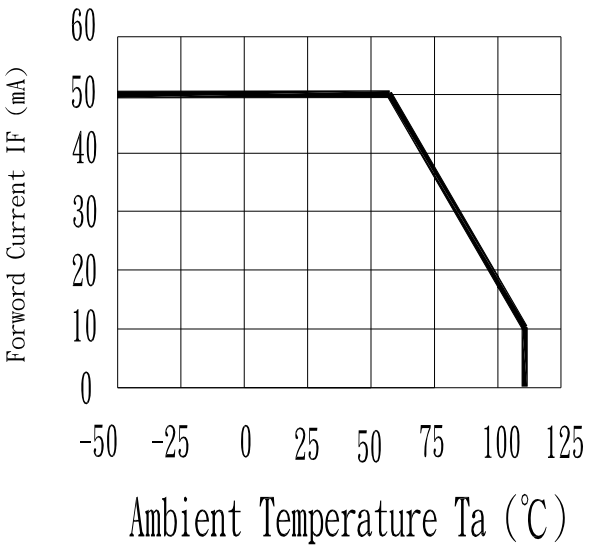


Fig. 2 Collecter Power Dissipation vs. Ambient Temperature

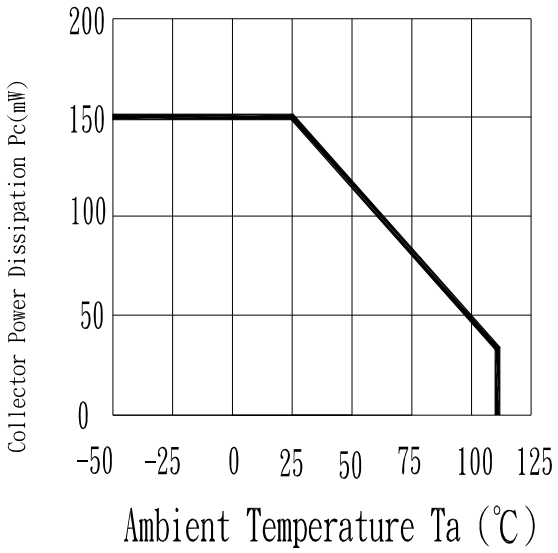


Fig. 3

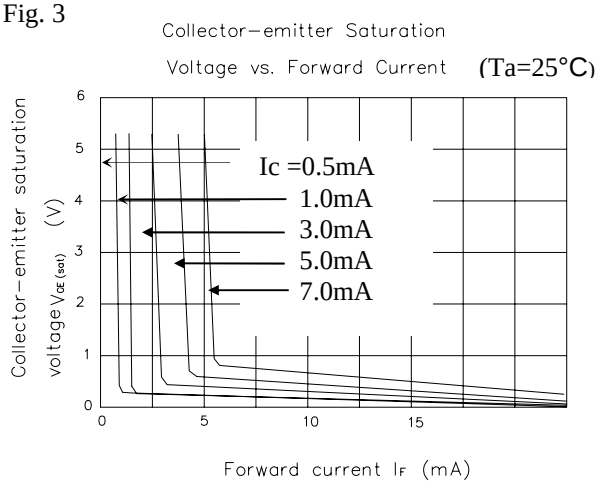


Fig. 4

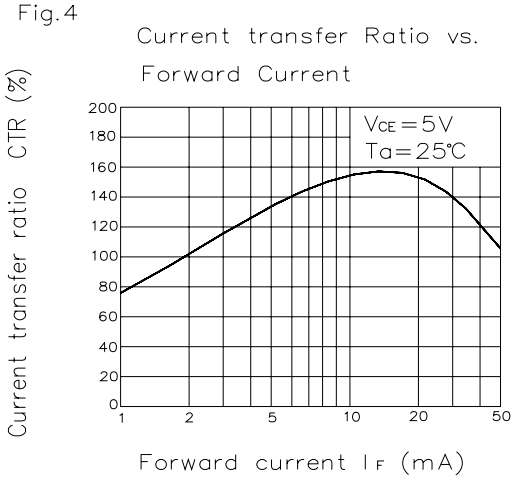


Fig. 5 Forward Current vs. Forward Voltage Voltage

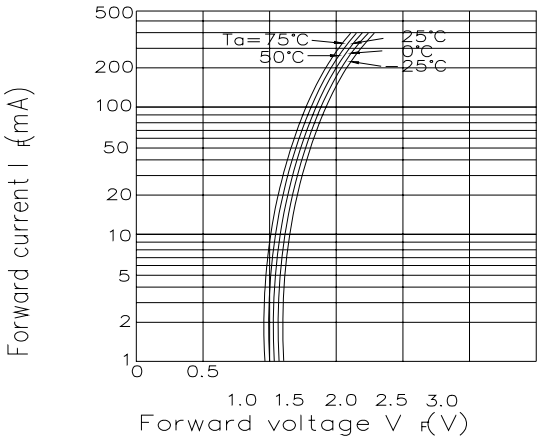
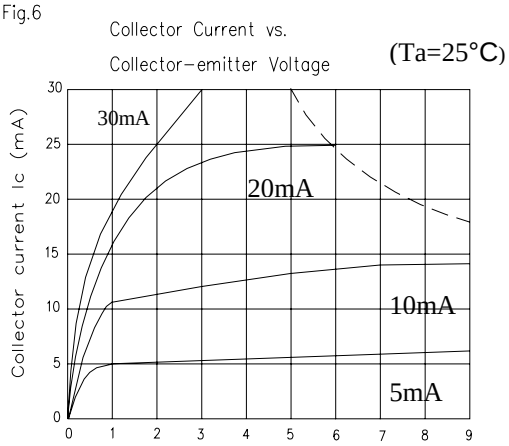


Fig.6




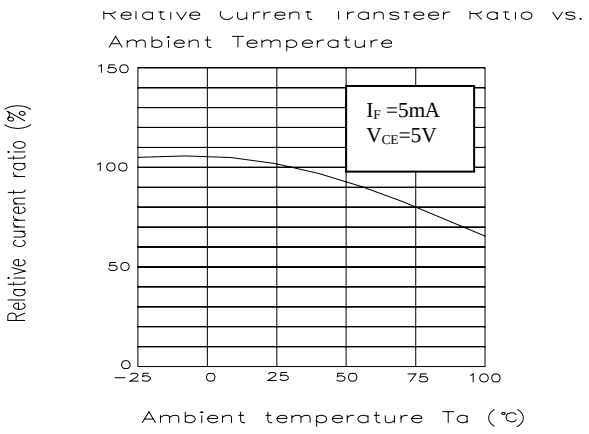


Fig.8 Collector−emitter Saturation Voltage vs. Ambient Temperature

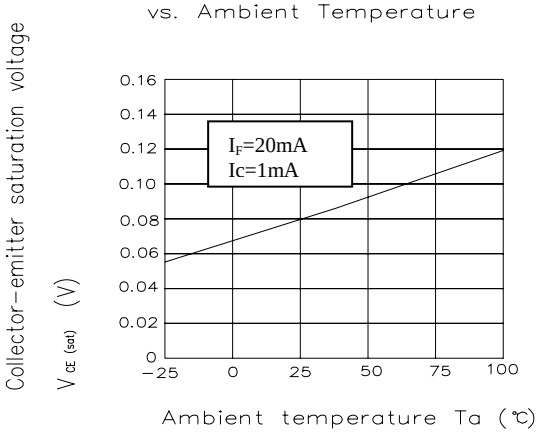

EL819 Series

Fig.9

Collector Dark Current vs. Ambient Temperature

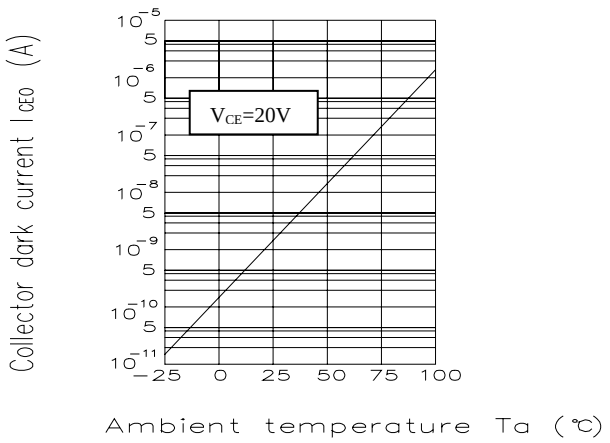


Fig.10

Response Time vs. Load Resistance




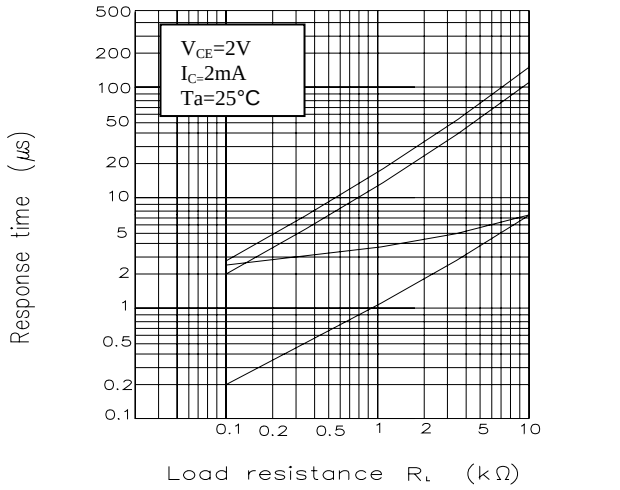


Fig.11

Frequency Response

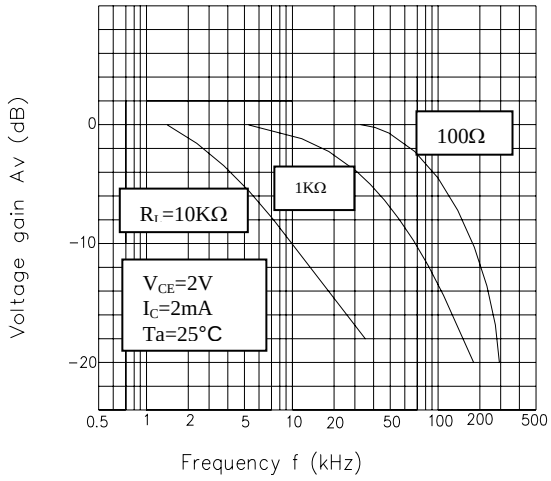





EL819 Series

RELIABILITY PLAN

- **The reliability of products shall be satisfied with items listed below.**

Confidence level : 90 % , LTPD : 10 %


Classification	Test Item	Description & Condition	(Acc.) Sample	Failure Criteria	Reference Standard
Endurance test	**Operation Life ***	**Ta = 25 ± 3°C IR: If = 50 mA Pt: Pc = 130 mW (Vf=1.4v) , 1000 hrs**	**0 / 22**	**CTR shift > 1.2 Vf > U* 1.0 Ir > U * 1.0 Vce(sat) >U*1.0 Bvceo < L*1.0 Bveco < L*1.0 L :Low Spec.Limit U : Up Spec. Limit**	**MIL-S-750 : 1026 MIL-S-883 : 1005 JIS C 7021 : B-1**
	High Temperature / High Humidity Reverse Bias (H3TRB)	**Ta = 85 ± 3°C , Humi. = 85 % rh Pt: 80% * Vce (max rating) , 1000 hrs**	**0 / 22**		**JIS C 7021 : B-11**
	High Temperature Reverse Bias (HTRB)	**Ta = 105 ± 3°C Pt: 100% * Vce (Max rating) , 1000 hrs**	**0 / 22**		**JIS C 7021 : B-8**
	Low Temperature Storage	**Ta = -50 ± 3°C , 1000 hrs**	**0 / 22**		**JIS C 7021 : B-12**
	High Temperature Storage	**Ta = 125 ± 3°C , 1000 hrs**	**0 / 22**		**JIS C 7021 : B-10 MIL-S-883 : 1008**
	Auto clave	**P = 15 PSIG , Ta = 121 °C , Humi. = 100 % rh , 48 hrs**	**0 / 22**		**JESD 22-A102-B**
Environmental Test	**Temperature Cycling (Air toAir)**	**125°C ~ - 55 °C 30 ~ 30 min , 100 cycles**	**0 / 22**		**MIL-S-883 :1010 JIS C 7021 : A-4**
	Thermal Shock (Liquid to Liquid)	**125 ~ - 55°C t (dwell) = 5 min t (trans.) = 10 sec , 100 cycles**	**0 / 22**		**MIL-S-202 : 107D MIL-S-750 : 1051 MIL-S-883 :1011**
	Solder Resistance	**Ta = 260 ± 3°C t (dwell) = 10 ± 1 sec**	**0 / 22**		**MIL-S-750 : 2031 JIS C 7021 : A-1**
	Solder Ability	**Ta = 230 ± 3 °C t (dwell) = 5 ± 1 sec**	**0 / 22**		**MIL-S-883 : 2003 JIS C 7021 : A-2**

Technical Data Sheet
Photocoupler


EL819 Series

Tube Packing Specifications (For Dip & M,S Type)


1. Tube



2. Inner Carton

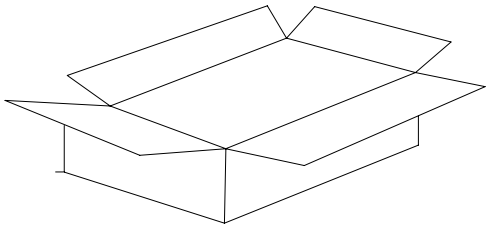

3. Outside Carton

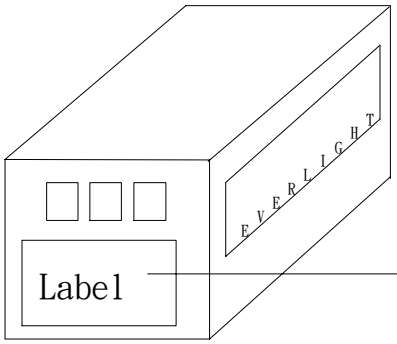





- Packing Quantity
  1. 100 Pcs/ Per Tube
  2. 25 Tubes / Inner Carton
  3. 12 Inner Cartons / Outside Carton

EL819 Series


Tape & Reel Packing Specifications

1. Tape & Reel (For S Type)

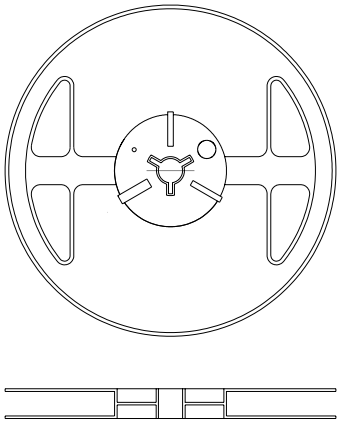

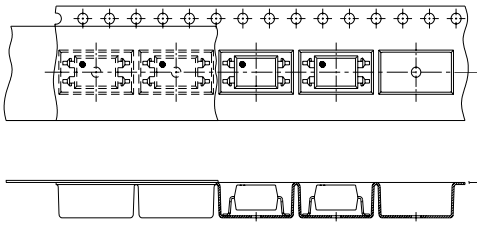


TA

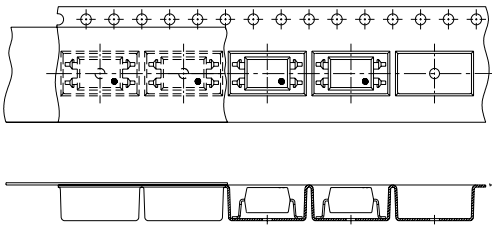


TB

2. Inner Carton

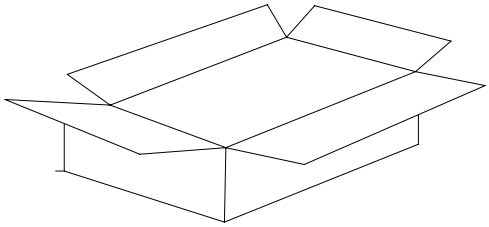

3. Outside Carton

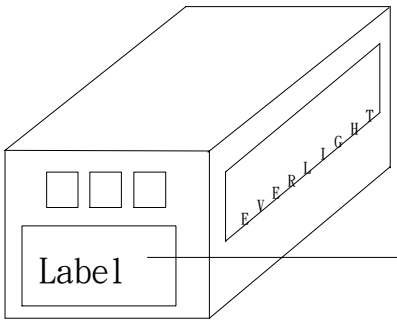



- Packing Quantity
  1. 1,000 Pcs/ Per Reel
  2. 3 Reels / Inner Carton
  3 10 Inner Cartons / Outside Carton