

# LPF2015 Series




<http://www.abco.co.kr>

## SMD Shielded type

### ▼ Shape & Dimensions / Recommended Solder Land Pattern

(Dimensions in mm)

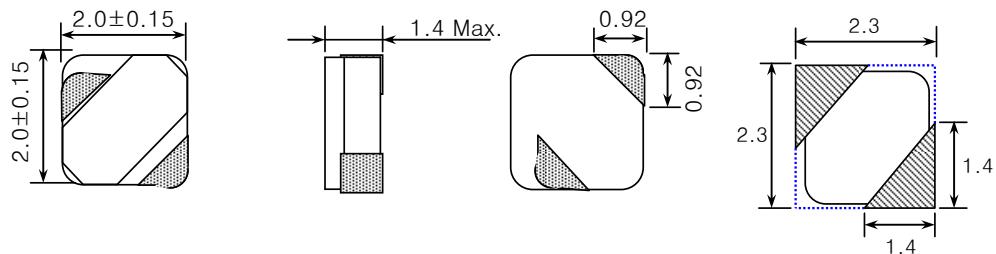

### ▼ Electrical Characteristics

( ) is typical value.

Ordering Code	Inductance		Frequency	DC Resistance(Ω)	Rated DC current(A)	
	L (uH)	Tol. (%)	F (KHz)	Rdc (Max.)	I <sub>dc1</sub> (Max.)	I <sub>dc2</sub> (Typ.)
LPF2015T-1R0N	1.0	±30	±20	0.075(0.05)	0.80	2.00
LPF2015T-1R5M	1.5			0.11(0.09)	0.75	1.72
LPF2015T-2R2M	2.2			0.13(0.11)	0.55	1.33
LPF2015T-3R3M	3.3			0.20(0.18)	0.48	1.19
LPF2015T-4R7M	4.7			0.23(0.20)	0.40	1.11
LPF2015T-6R8M	6.8			0.35(0.32)	0.30	0.88
LPF2015T-100M	10			0.52(0.48)	0.25	0.65
LPF2015T-150M	15			0.85(0.80)	0.18	0.49
LPF2015T-220M	22			1.05(1.00)	0.15	0.46

### ▼ Test Equipments

- . L : Agilent E4980A Precision LCR Meter
- . Rdc : HIOKI 3540 mΩ HiTESTER
- . I<sub>dc1</sub> : Agilent 4284A LCR Meter + Agilent 42841A Bias Current Source
- . I<sub>dc2</sub> : Yokogawa DR130 Hybrid Recorder + Agilent 6692A DC Power Supply

### □ Packing style

T : Taping    B : Bulk

### ▼ Test Condition

- . L(Frequency , Voltage) : F=100 (KHz) , V=0.5 (V)
- . I<sub>dc1</sub>(The saturation current) :  $\Delta L \leq 30\%$  reduction from nominal L value
- . I<sub>dc2</sub>(The temperature rise) :  $\Delta T = 40^\circ\text{C}$  typical at rated DC current
- \* Rated DC current(I<sub>dc</sub>) : The value of I<sub>dc1</sub> or I<sub>dc2</sub> , whichever is smaller

### ▼ Operating Temperature Range

-30 ~ +85°C (Including self-generated heat)