

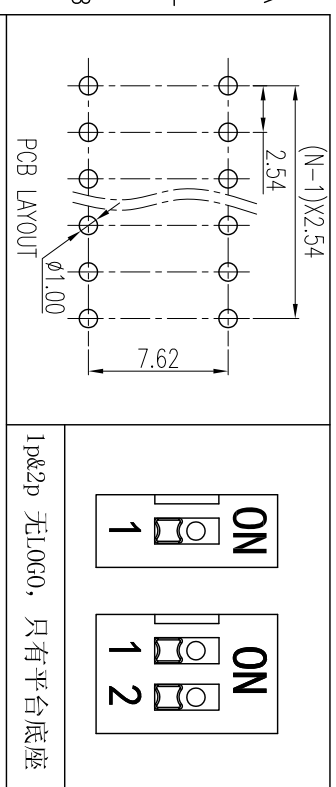
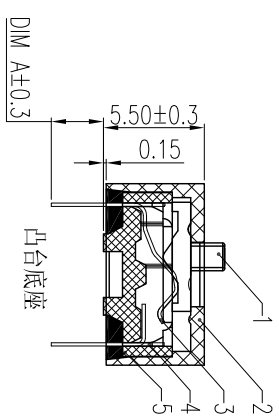



REV	ECN	CONTENT	CHECK	DATE
V0.0		初版发行	YZG	2016.09.15
V1.0		整理图纸	LJ	2019.09.21
V2.0		整理图纸	WL	2020.06.03

DIM A/B	长针	短针
凸台底座	3.65	2.85
平台底座	3.80	3.00


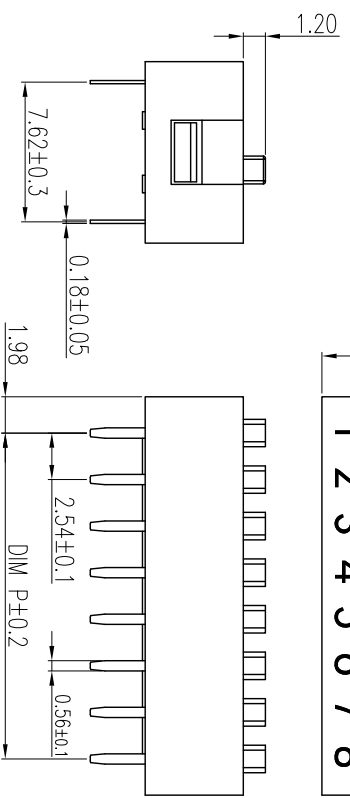


1p&2p 无10G0, 只有平台底座

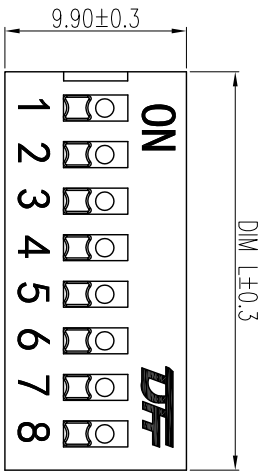

- 技术要求:
- 额定电流: 25mA, 24VDC (开与关切换时) 100mA, 50VDC (开与关不切换时)
 - 接触阻抗: $\leq 50m\Omega$ (初始), $\leq 100m\Omega$ (寿命测试后)
 - 绝缘电阻: $\geq 100M\Omega / 500 VDC$
 - 耐电压: 500VAC/1minute
 - 拨动力: 1000g max
 - 拨动行程: 2.0mm
 - 机械寿命: ≥ 2000 cycles
 - 使用温度: $-40^{\circ}C \sim +85^{\circ}C$
 - 存储温度: $-40^{\circ}C \sim +85^{\circ}C$
 - 符合RoHS要求

焊接说明:
 手工焊接: 30W电烙铁, $320 \pm 5^{\circ}C$, 3S max
 波峰焊接: $250 \pm 10^{\circ}C$, 5S max
 焊接前保持开关在“OFF”状态

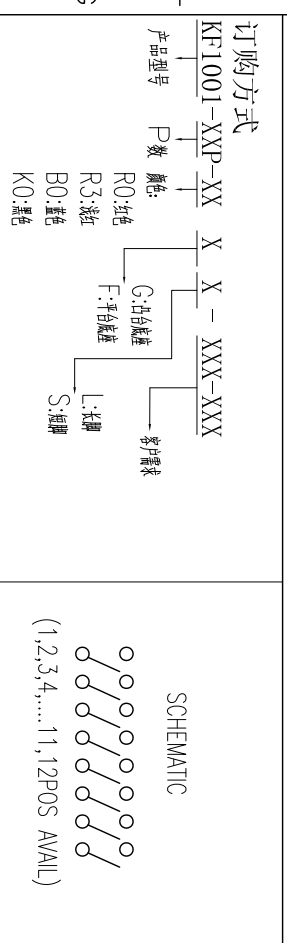

POLES	DIM P	DIM L	底座	工程塑料	UI94V-0
1	/	3.96	PIN2	/	镀金
2	2.54	6.50	外壳	/	镀金
3	5.08	9.04	拨柄	/	UI94V-0
4	7.62	11.58	零件名称	零件编码	数量
5	10.16	14.12	APP.	DATE: 2020.6.3	NAME: KF1001-XXP-XXXX-DFP-XXX
6	12.70	16.66	CHK.	DATE: 2020.6.3	DWGNO. W20000011
7	15.24	19.20	DWG.	DATE: 2020.6.3	SHEET 1/1
8	17.78	21.74	UN.	DATE: 2020.6.3	PROJECTION-METHOD
9	20.32	24.28	S.	DATE: 2020.6.3	
10	22.86	26.82			
11	25.40	29.36			
12	27.94	31.90			

General tolerance in mm		radii and chamfers		shorter angle side		=		//	
over 0	to 3	over 0.5	to 3	over 10	to 50	over 0	to 100	over 0	to 150
±0.15	±0.2	±0.25	±0.3	±0.5	±0.8	±0.2	±0.5	±1.0	±1.0

凯峰电子

KAIFENG ELECTRONICS CO., LTD

凯峰电子有限公司