


ROCPU Product features
 Voltage: < 12V
 Current: < 20mA
 Conduction time: 2ms
 Closed circuit resistance: < 10ohm
 Open circuit resistance: > 10m ohm
 High temperature resistance: 120 degrees
 Terminal tension: 500gf / min
 Humidity:25~95%RH
 Service life: 100000 times

ROCPU Product features

1. TPSW-200m-20 is a single ball type unidirectional tilt inductive trigger switch.
2. When the guide end (no pin end) of the product is tilted and the tilt angle is greater than 10 degrees, the product is in the open circuit, (off) state. When the horizontal state of the product is tilted, the trigger end (gold-plated pin end) is lower than the horizontal and the tilt angle is greater than 10 degrees, the product is in the closed circuit, (on) state.
3. When it is placed horizontally, shaking is easy to trigger, but when there is no foot down, shaking is not easy to trigger.
4. The product of this specification is completely sealed, waterproof and dustproof.
5. Under normal conditions, the service life of the switch can reach 100000 times.
6. This product is made of environmental protection metal material. ROCPU

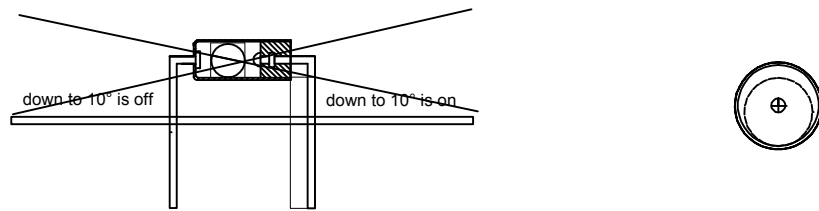

⑥	Heat shrinkable tube	1	PET		
⑤	Rubber stopper	1	LCP		
④	Roll Ball	1	Brass	silver	
③	Guide needle A	1	Brass	nickel	
②	Guide needle B	1	Brass	gold-plated	
①	Copper tube	1	Brass	nickel	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING	REMARK

A4					COMMON TOLERANCE: X.XX ± 0.10 X.X ± 0.15 X ± 0.25 ANGULAR —	UNIT	MM	PROJECTED		PRODUCT NAME:
A3			DRAWN BY			FUYUAN	CHECKED BY	COCO	MODEL NO:	TPSW-200M
A2			DATE			2017	APPROVAL BY	ALEN	Https:	www.rocpu.tw
A1			ROCPU TECHNOLOGY CO.,LTD							
REV.	DATE	REVISION	DESCRIPTION			ISSUE	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission			
		A		B	C	D	E	F	G	