


DSB500-871HM

High Performance Digital Signage Player
Supports Socket G2 3rd Generation Intel®
Core™ Processor

NEW

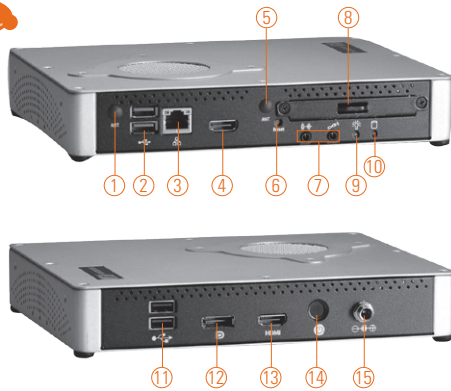

- | | | |
|----------------------------|----------------------------|------------------|
| 1. WiFi antenna (optional) | 6. Reset button | 10. HDD LED |
| 2. USB 3.0 x 2 | 7. Audio (Line-out/Mic-in) | 11. USB 2.0 x 2 |
| 3. Ethernet | 8. 2.5" HDD tray | 12. DisplayPort |
| 4. HDMI | 9. Power LED | 13. HDMI |
| 5. Power button | | 14. Power button |
| | | 15. 19V DC in |



Specifications

| | |
|-----------------------|---|
| Standard Color | Black/Grey |
| Construction | Heavy-duty steel |
| CPU | Socket G2 (rPGA988B) socket for 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge) |
| Chipset | Intel® HM76 PCH |
| System Memory | 1 x 204-pin DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB |
| Storage | 1 x 2.5" SATA HDD tray |
| BIOS | AMI UEFI BIOS |
| System I/O Outlet | 1 x DisplayPort 2 x USB 3.0 2 x USB 2.0 1 x Audio (Line-out/Mic-in) 2 x HDMI 1 x 10/100/1000Mbps Ethernet 1 x power on/off button 1 x reset button |
| Indicator | 1 x LED for system status |
| WiFi | Optional 802.11 b/g/n |
| Expansion Slot) | 1 x PCI Express Mini Card |
| Operating Temperature | 0°C ~ +40°C (+32°F ~ +104°F) |
| Dimensions | 210 mm (8.26") (W) x 165 mm (6.49") (D) x 35 mm (1.38") (H) |
| Packing Dimensions | TBD |
| Weight (net/gross) | 1.5 kg (3.3 lb)/ 2.5 kg (5.51 lb) |
| Certification | CE |

Features

- Supports Socket G2 (rPGA988B) 3rd Generation Intel® Core™ i5/ i3 processors
- Intel® HM76 chipset
- DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB
- Optional wireless LAN module
- 1 DisplayPort, 2 HDMI
- One 2.5" SATA drive bay
- Supports wall mount and VESA mount
- Supports 2 USB 3.0 ports
- Supports TPM 1.2

Overview

Industrial Panel
Computers &
Monitors

Heavy-duty Fanless
Touch Panel
Computers

Digital
Signage
Solutions

Healthcare
& Medical
Solutions

Open Frame
Panel
Computers

Accessories

Optional EOS Installation

Windows® XP Embedded

Optional OS Installation

Windows® XP, Windows® 7, Windows® Embedded 8

Ordering Information

Standard

DSB500-871HM High performance digital signage player supports Socket G2 3rd Gen. Intel® Core™ processor

Optional

Wireless Lan kit Wi-Fi module and antenna

VESA mount kit

Wall mount kit

* Specification and certifications are based on options and may vary.