



	13	12	11	10	9	8	7	6	5	4	3	2	1	
J														J
I	CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	N.P.T. FITTING SIZE	FORM SIZE	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER					
	36277	1300970181	.750-.875 / 19.05-22.23	9.500±1.000 / 241.30±25.40	1 1/4	5	---		PG1014					
	36271	1300970175	.875-1.000 / 22.23-25.40	8.625±1.000 / 219.08±25.40					PG1016					
	36272	1300970176	1.000-1.125 / 25.40-28.58	9.000±1.000 / 228.60±25.40					PG1018					
	36273	1300970177	1.125-1.250 / 28.58-31.75	10.000±1.000 / 254.00±25.40					PG1020					
36274	1300970178	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40					PG1022						
H	36278	1300970182	.750-.875 / 19.05-22.23	9.500±1.000 / 241.30±25.40	1 1/2	5	---		PG1214					
	36475	1300970235	.875-1.000 / 22.23-25.40	8.625±1.000 / 219.08±25.40					PG1216					
	36476	1300970236	1.000-1.125 / 25.40-28.58	9.000±1.000 / 228.60±25.40					PG1218					
	36477	1300970237	1.125-1.250 / 28.58-31.75	10.000±1.000 / 254.00±25.40					PG1220					
	36478	1300970238	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40					PG1222					
G	36479	1300970239	1.312-1.437 / 33.32-36.50	12.000±1.000 / 304.80±25.40	6	6	---		PG1223					
	36480	1300970240	1.437-1.562 / 36.50-39.67	13.125±1.000 / 333.38±25.40			---		PG1225					
	36481	1300970241	1.562-1.687 / 39.67-42.85	15.750±1.500 / 398.78±38.10			---		PG1227					
	36482	1300970242	1.687-1.812 / 42.85-46.02	16.250±1.500 / 412.75±38.10			---		PG1229					
	36483	1300970243	1.750-1.875 / 44.45-47.63	16.250±1.500 / 412.75±38.10			---		PG1230					
F	36484	1300970244	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40	2	6	---		PG1622					
	36279	1300970183	1.312-1.437 / 33.32-36.50	12.000±1.000 / 304.80±25.40			---		PG1623					
	36485	1300970245	1.437-1.562 / 36.50-39.67	13.125±1.000 / 333.38±25.40			---		PG1625					
	36486	1300970246	1.562-1.687 / 39.67-42.85	15.750±1.500 / 398.78±38.10			---		PG1627					
	36487	1300970247	1.687-1.812 / 42.85-46.02	16.250±1.500 / 412.75±38.10			---		PG1629					
E	36488	1300970248	1.750-1.875 / 44.45-47.63	16.250±1.500 / 412.75±38.10	7	7	---		PG1630					
	36489	1300970249	1.812-1.937 / 46.02-49.20	16.250±1.500 / 412.75±38.10			---		PG1631					
	36816	1300970292	1.937-2.062 / 49.20-52.37	16.250±1.500 / 412.75±38.10			---		PG1633					
	36287	1300970188	2.062-2.187 / 52.37-55.55	17.500±1.500 / 444.50±38.10			---		PG1635					
	36288	1300970189	2.187-2.312 / 55.55-58.72	17.500±1.500 / 444.50±38.10			---		PG1637					
	36289	1300970190	2.312-2.437 / 58.72-61.90	17.500±1.500 / 444.50±38.10			---		PG1639					
D														D
C														C
B														B
A														A

GRIP ASSEMBLED

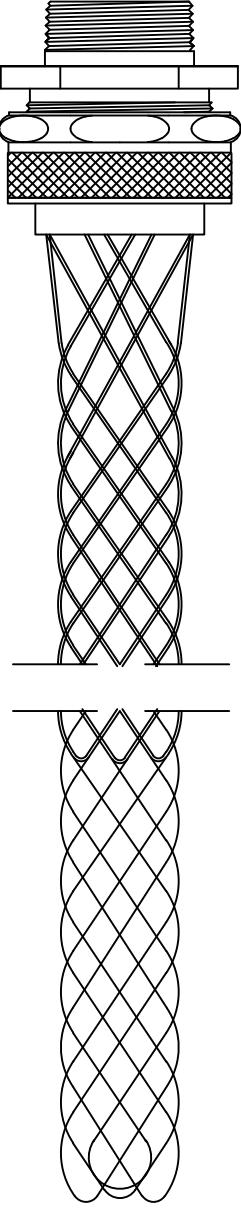

INSTRUCTIONS INCLUDED WITH GRIP

SINGLE/DOUBLE WEAVE MESH CONSTRUCTION

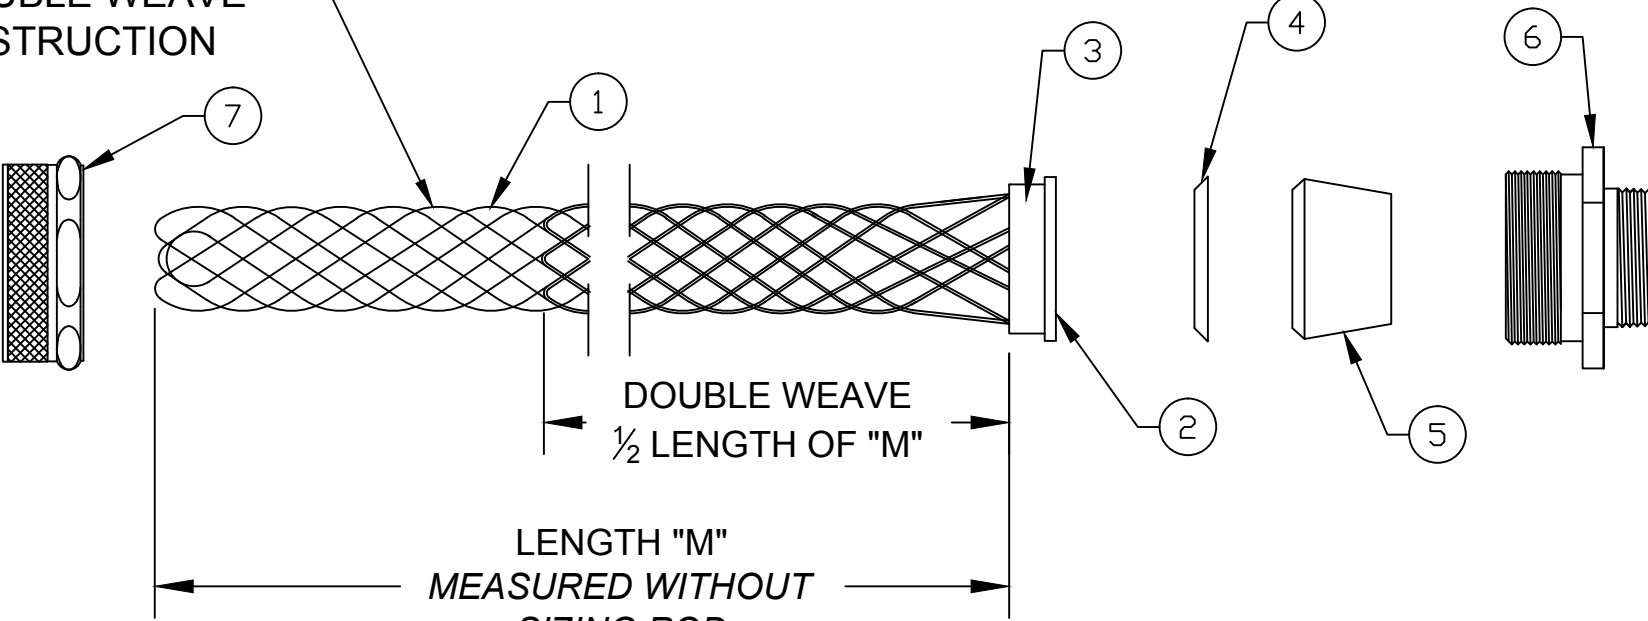

DOUBLE WEAVE
1/2 LENGTH OF "M"

LENGTH "M"
MEASURED WITHOUT
SIZING ROD

N.P.T. SIZE
SEE TABLE

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ALUMINUM
3	OUTER RING	ALUMINUM
4	FRICTION RING	ZINC PLATED STEEL
5	GROMMET	RUBBER
6	THREADED BODY	ALUMINUM
7	COMPRESSION NUT	ALUMINUM

RELEASE SALES DWG

EC NO: IPG2014-2037

DRWN: HRUIZ01 2014/10/20

CHKD: HKNEELAN 2014/10/20

APPR: JFMURPHY 2016/05/04

REV

QUALITY SYMBOL

▽=0

▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

INCH/MM

DRAWN BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

MATERIAL NO.

SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

NTS

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

STRAIN RELIEF
DELUXE STRAIGHT MALE
1-1/4" TO 2" N.P.T.

MOLEX INCORPORATED

DOCUMENT NO.

SD-130097-104

SHEET NO.

1 OF 1