

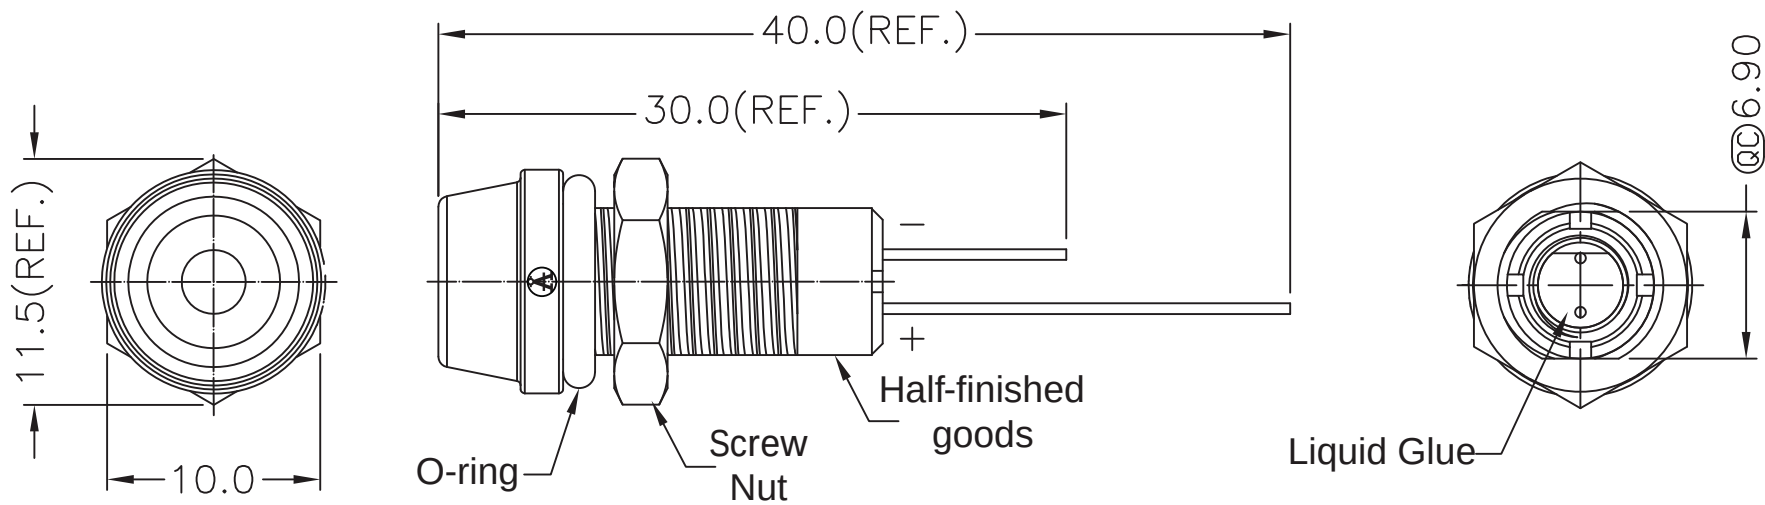


Recommended Panel Cut-Out

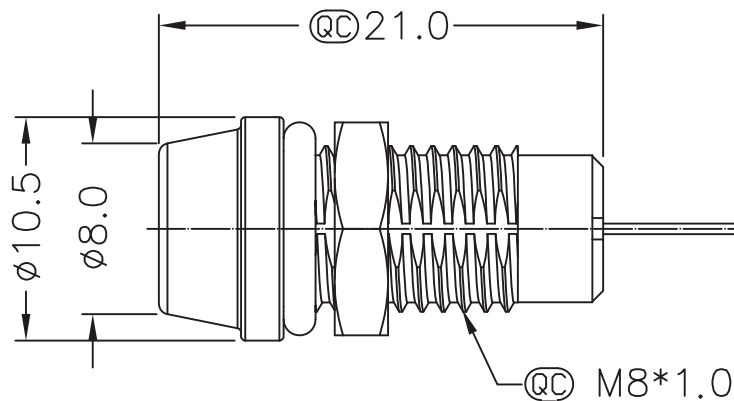

Material:

- Waterproof Rate: IP67
- LED Holder: PC+ABS, Black
- LED: $\varnothing 3\text{mm}$, Blue
- O-ring: EPDM, Black
- Screw Nut: Nylon+GF
- Operating voltage: 4V DC
- Operating Temperature: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$
- For Panel Thickness 6.5mm Max.

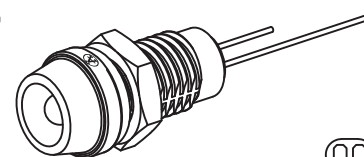

Ⓢ Quality Control: Important Dimension to check

Unit: mm



Scale	Free					Date	Name	Title Waterproof LED Blue color, plastic, Ø3.0mm	
TOLERANCE					Drawn	05.03.14	Wilson		
X.	±0.3							ASSMANN WSW-No. A-LED8-1BAAS-PR7-1	
X.X	±X				Approved	05.03.14	Groll		
X.XX	±X							Drawing-No. ASS 6226 CO	
DIM	TOL								
X.°	±X°								
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		Replace	Sheet 1/1