

**NOTES:**

**MATERIAL**

1. Insulator Material: PBT+30%G.F.(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating : Gold Flash / Tin or Full Tinned Over Ni

**ELECTRICAL**

1. Current Rating : 3.0AMP
2. Withstand Voltage : 1000V AC/minute
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min

**ENVIRONMENTAL**


1. Operation Temperature: -40°C to +105°C
2. Packing : Tray
3. No side slot "A" and "B" from 6 to 16 pin
- No side slot "A" from 18 to 58 pin

**Ordering Information**

**AWH xxA-0xx2-T**

③ No. of Contacts	Latch Type
06 08	0(w/o latch)
10 12	2(with short latch)
14 16	3(with long latch)
18 20	
24 26	
30 34	
40 50	
60 64	

2: Gold Flash / Tinned  
5: Full Tinned

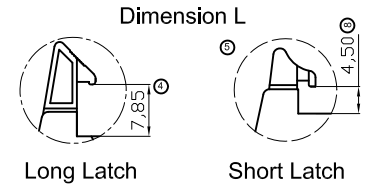

**RoHS compliant**  
Unit: mm



Scale	Free	⑨	Add UL file no.	12.12.2013	Amy		Date	Name
TOLERANCE		⑧	Add the full Tinned version	11.11.2013	Winnie	Drawn	25.01.2006	Alex
X.X	±0.40	⑦	Update	29.03.2013	Winnie	Approved	12.12.2013	Amy
X.XX	±0.25	⑥	Add special PCB layout	07.12.2010	Alex			
X.XXX	±0.15	⑤	Correct drawing of short latch	05.05.2010	Dean			
Angle	±3°	④	Change dimension	27.10.2009	Dean			
		Id.	Modification	Date	Name			

Customer-No.  
ASSMANN WSW-No.  
**AWH xxA-0xx2-T**

Drawing-No.  
**ASS 2311 CO** rev09  
Replace Sheet