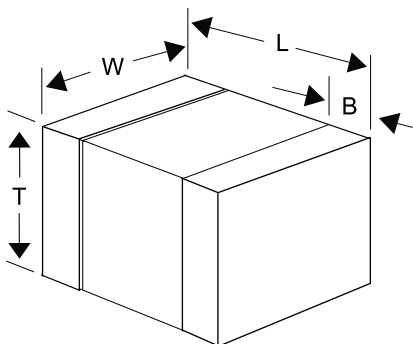


KEMET, Z-SMS, Ferrite Beads, Noise Suppression, 350 mOhms

**Dimensions**

Chip Size	0603
L	1.6mm +/-0.15mm
W	0.8mm +/-0.15mm
T	0.8mm +/-0.15mm
B	0.3mm +/-0.2mm

Packaging Specifications

Packaging:	T&R
Packaging Quantity:	4000

General Information

Series:	Z-SMS
Style:	SMD Chip
Description:	Chip Bead Signal Line
Features:	Increases The Z Characteristics Sharply Above 20MHz And Is Applicable For Radiated Noise In The 100MHz-300MHz Range, Especially Effective On Video Signals
RoHS:	Yes

Specifications

Impedance:	240 Ohms (100 mHz)
Impedance Tolerance:	25%
Ripple Current:	300 mA (MAX)
Temperature Range:	-55/+125°C
Resistance:	0.35 Ohms