


BATTERIES

- Memory backup applications such as GPS devices, game consoles etc
- Manufactured to IS9002 and UL approved
- Diameter range from 12.5mm to 24.5mm
- Horizontal and vertical PCB mount available
- Rated capacity 25 to 550mAh.

LITHIUM COIN CELL

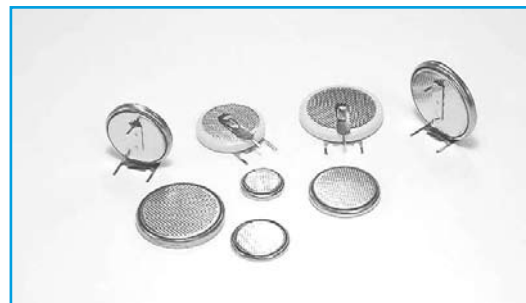

SECTION 7

ORDERING INFORMATION

Ordering Code	Nominal Voltage (V)	Nominal Capacity (mAh)	Standard Current (mA)	Continuous Current (mA)	Pulse Current (mA)	Max Dimensions (mm)	Weight (g)
CR1216	3	25	0.1	0.2	5	12.5 x 1.6	0.7
CR1220	3	30	0.1	0.2	5	12.5 x 2	0.9
CR1225	3	48	0.1	0.2	5	12.5 x 2.5	1
CR1616	3	45	0.1	0.3	8	16 x 1.6	1.2
CR1620	3	60	0.1	0.3	8	16 x 2	1.3
CR2016	3	70	0.1	0.3	10	20 x 1.6	1.8
CR2025	3	140	0.2	0.5	15	20 x 2.5	2.2
CR2032	3	200	0.2	0.5	15	20 x 3.2	2.8
CR2320	3	120	0.2	0.5	15	23 x 2	3
CR2330	3	260	0.2	0.5	15	23 x 3	4
CR2430	3	270	0.2	1	15	24.5 x 3	4.2
CR2450	3	550	0.2	1	15	24.5 x 5	6.2

Add to end of ordering code FTH22 for horizontal PCB mount
 Add to end of ordering code FTV10 for vertical PCB mount

BATTERIES

- Suitable for use in cameras, instruments, clocks or memory back up
- Safety vent mechanism to relieve excessive internal pressure.

LITHIUM MANGANESE DIOXIDE



ORDERING INFORMATION

Ordering Code	Nominal Voltage (V)	Nominal Capacity (mAh)	Standard Discharge Current (mA)	Max Continuous Discharge Current (mA)	Max Pulse Discharge Current (mA)	Temp Range (°C)	Dimensions (mm)	Weight (g)
CR123A	3	1300	14	1000	3000	-20 ~ +60	L17.1 x W34.5	16
CR2	3	750	10	1000	2500	-20 ~ +60	L15.5 x W27	10
CRP2	6	1300	14	1000	3000	-20 ~ +60	L34 x W19.5 x H36	36
2CR5	6	1300	14	1000	3000	-20 ~ +60	L34 x W17 x H45	36