



TB1S-12 thru TB10S-12

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS


FEATURES

- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ High surge current capability
- ◆ Lead free in comply with EU RoHS2011/65/EU directives

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

MECHANICAL DATA

- ◆ Case: ABS/LBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.088 grams

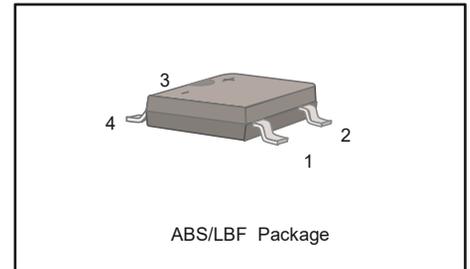

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	TB1S-12	TB2S-12	TB4S-12	TB6S-12	TB8S-12	TB10S-12	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=125^\circ\text{C}$	$I_{F(AV)}$	1.2						A
Peak Forward Surge Current (Note1)	I_{FSM}	40						A
Maximum Forward Voltage at 1.2A	V_F	1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	5 100						μA
Typical Junction Capacitance (Note2)	C_J	18						pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$ $R_{\theta JC}$	72 18						$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150						$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. Mounted on 1.5" X 1.5" (3.81 X 3.81 cm) copper pad areas.



TB1S-12 thru TB10S-12

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Average Rectified Output Current Derating Curve

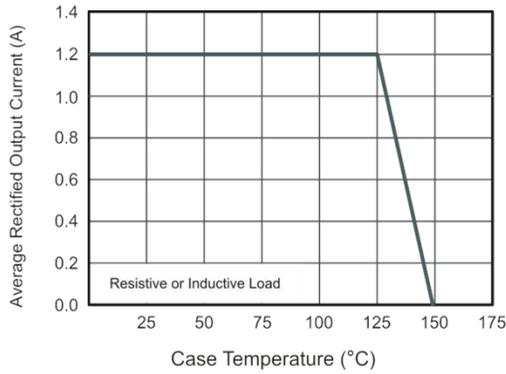


Fig.2 Typical Reverse Characteristics

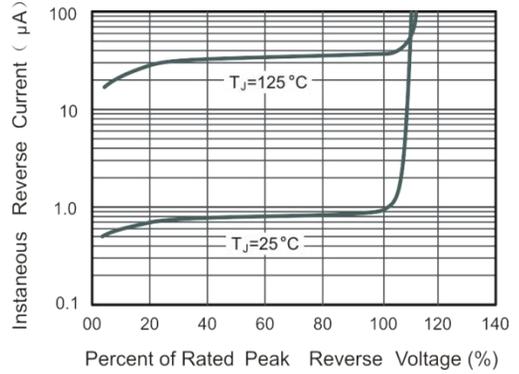


Fig.3 Typical Instantaneous Forward Characteristics

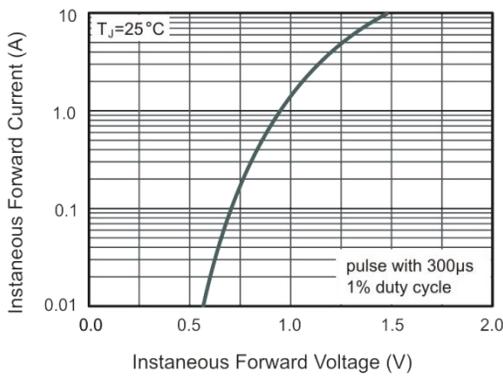


Fig.4 Typical Junction Capacitance


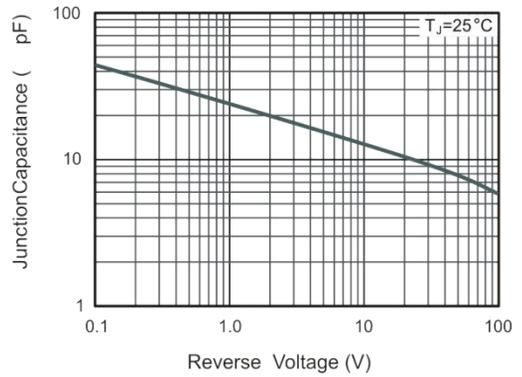


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



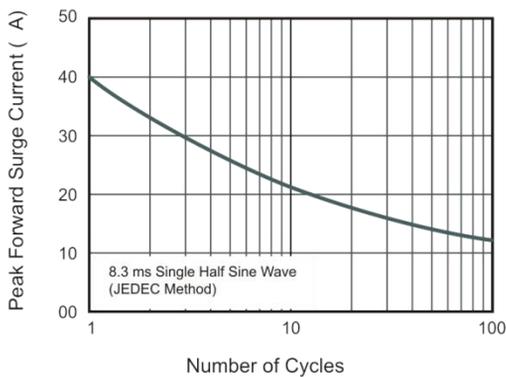


TB1S-12 thru TB10S-12

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS

PACKAGE OUTLINE

ABS/LBF

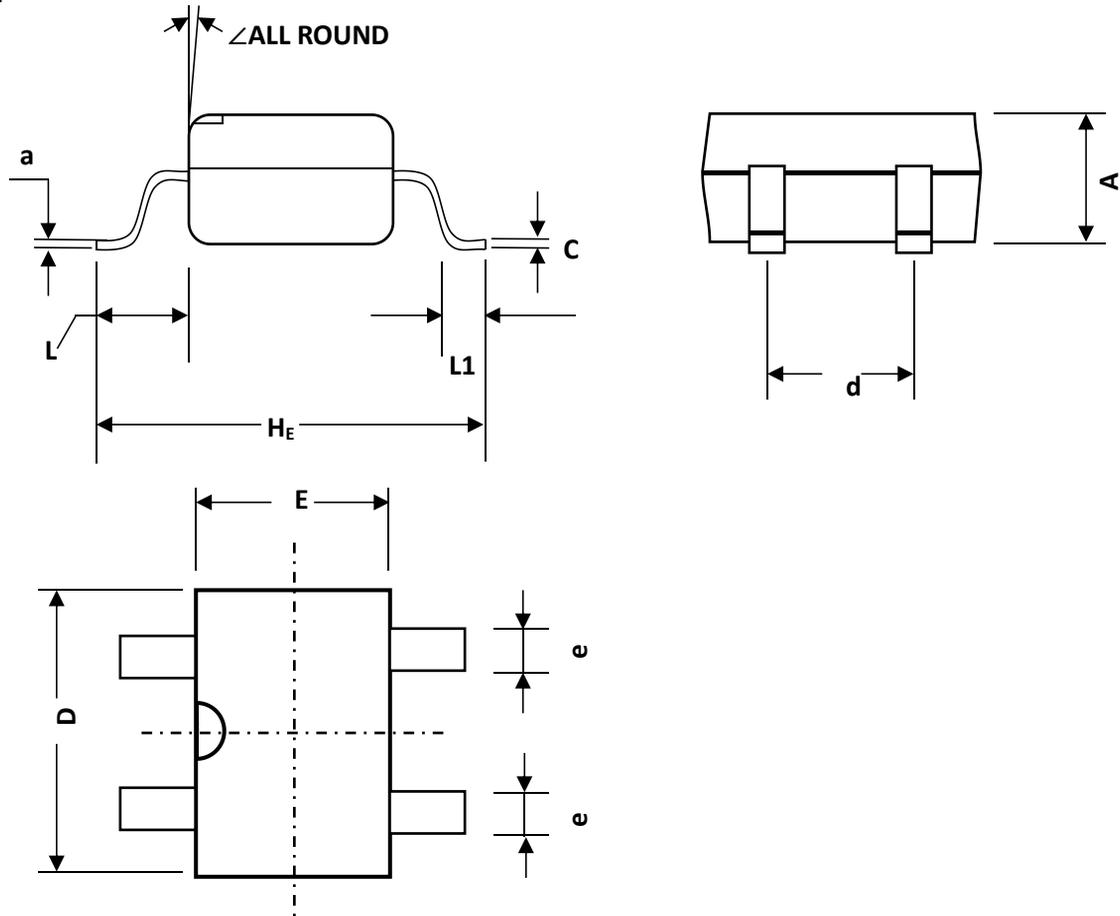

ABS/LBF mechanical data

UNIT		A	C	D	E	H_E	d	e	L	L1	a	\angle
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				
mil	max	59	8.7	205	177	252	165	28	37	24	8	
	min	51	5.9	193	166	236	150	20				

ORDERING INFORMATION

Device	Package	Shipping
TB1S-12 thru TB10S-12	ABS/LBF	3,000/Tape & Reel (11 inches)
		5,000/Tape & Reel (13 inches)