

# PRODUCT SPECIFICATION

新弘智

SPEC. NO: T-0638-006I

DATE: Aug. 7, 2018

CUSTOMER'S PRODUCT NAME:

EMTEK PRODUCT NAME:

LCD1210-Series

THIS SPECIFICATION IS:

- FULLY ACCEPTED
- DENIED
- ACCEPTED UNDER THE FOLLOWING CONDITIONS



SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_

NAME(PRINT): \_\_\_\_\_

TITLE: \_\_\_\_\_

 **EMTEK CO., LTD.**

本文件內容全部或部份,未經兆欣科技股份有限公司同意不得以任何形式複製或其他用途  
All rights reserved.This document or parts thereof,may not be reproduced by any means or used in any manner without written permission of EMTEK CO.,LTD.

FACTORY:

39, Chingao Rd., (305)Hsinpu,  
Hsinchu Hsien, Taiwan, R. O. C  
TEL: 03-5894-433  
FAX: 03-5894-523

# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I



## 1. Scope

This specification applies Wire Wound Power Inductors LCD1210-Series to be delivered to user.

## 2. Product Identification

LCD 1210 - 4R7 □ - T

(1) (2) (3) (4) (5)

(1) Product name

(2) Shapes and dimensions

(3) Inductance


4R7 : 4.7 uH

(4) Tolerance

K=±10% , M=±20%

(5) Taping Type

## 3. Shapes and Dimensions

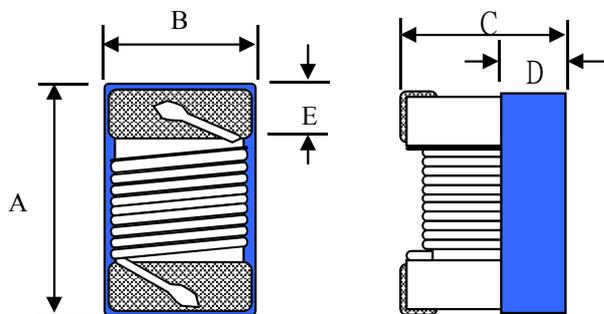

A max. : 3.60 mm


B max. : 2.90 mm

C max. : 2.50 mm

D ref. : 1.10 mm

E : 0.5 ± 0.1 mm

Equivalent circuit



No Polarity

Drawn by	Checked by	Approved by
Cindy Aug. 30. 2017	Zheny Aug. 30. 2017	Lu Aug. 30. 2017

# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I



## 4. Electrical Characteristics

Customer Part Number	Our Product Part Number	Inductance (uH)/MHz	Inductance Tolerance	Q/MHz Typ.	SRF Typ. (MHz)	Rdc ±20% (Ω)	Idc Typ.(mA)		Irms Typ.(mA)		Color Coding		
							L ↓ 10%	L ↓ 30%	T ↑ 25°C	T ↑ 40°C	1st	2nd	3rd
	LCD1210-1R0□-T	1.0/7.9	K	27/7.9	350	0.08	1800	2200	2000	2400	Brown	Black	Red
	LCD1210-1R2□-T	1.2/7.9	K	23/7.9	250	0.10	1500	1600	1400	1700	Brown	Red	Red
	LCD1210-2R2□-T	2.2/7.9	K	21/7.9	197	0.13	1400	1500	1200	1600	Red	Red	Red
	LCD1210-3R3□-T	3.3/7.9	K	22/7.9	92	0.17	1200	1400	1100	1500	Orange	Orange	Red
	LCD1210-4R7□-T	4.7/7.9	K	18/7.9	61	0.22	1000	1300	910	1400	Yellow	Violet	Red
	LCD1210-6R8□-T	6.8/7.9	K	22/7.9	50	0.25	850	1000	780	1100	Blue	Gray	Red
	LCD1210-100□-T	10/2.5	K	21/2.5	36	0.30	740	950	670	1000	Brown	Black	Orange
	LCD1210-150□-T	15/2.5	K	18/2.5	20	0.55	680	760	650	820	Brown	Green	Orange
	LCD1210-220□-T	22/2.5	K	18/2.5	18	0.68	310	-	280	-	Red	Red	Orange
	LCD1210-330□-T	33/2.5	K	18/2.5	11	1.05	400	540	450	550	Orange	Orange	Orange
	LCD1210-470□-T	47/2.5	K	16/2.5	8	1.55	270	-	280	-	Yellow	Violet	Orange
	LCD1210-680□-T	68/2.5	K	16/2.5	6	2.54	260	360	270	420	Blue	Gray	Orange
	LCD1210-101□-T	100/2.5	K	16/2.5	5	3.72	240	300	250	340	Brown	Black	Yellow


# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I





1. When ordering, please specify tolerance and packaging codes. Ex: LCD1210-4R7K-T  
Tolerance : K =  $\pm 10\%$  , M =  $\pm 20\%$   
Packaging : Clear tape and reel { standard }.
2. L , Q : Agilent E4991A RF Impedance/Material Analyzer + Agilent 16197A  
Test Fixture  
(The electrical specification test by the smallest gap position) or HP16193A
3. SRF : Agilent E4991A RF Impedance/Material Analyzer + Agilent 16197A  
Test Fixture  
(The electrical specification test by the smallest gap position) or HP16193A
4. Rdc : Chroma 16502 Milliohm Meter, or equivalent.
5. Idc for Inductance drop 10% & 30% from its value without current.
6. Operating temperature range from  $-25^{\circ}\text{C}$  to  $105^{\circ}\text{C}$ .
7. Irms for a  $25^{\circ}\text{C}$  & a  $40^{\circ}\text{C}$  rise above  $25^{\circ}\text{C}$  ambient.



# PRODUCT SPECIFICATION

SPEC. NO.


T-0638-006I

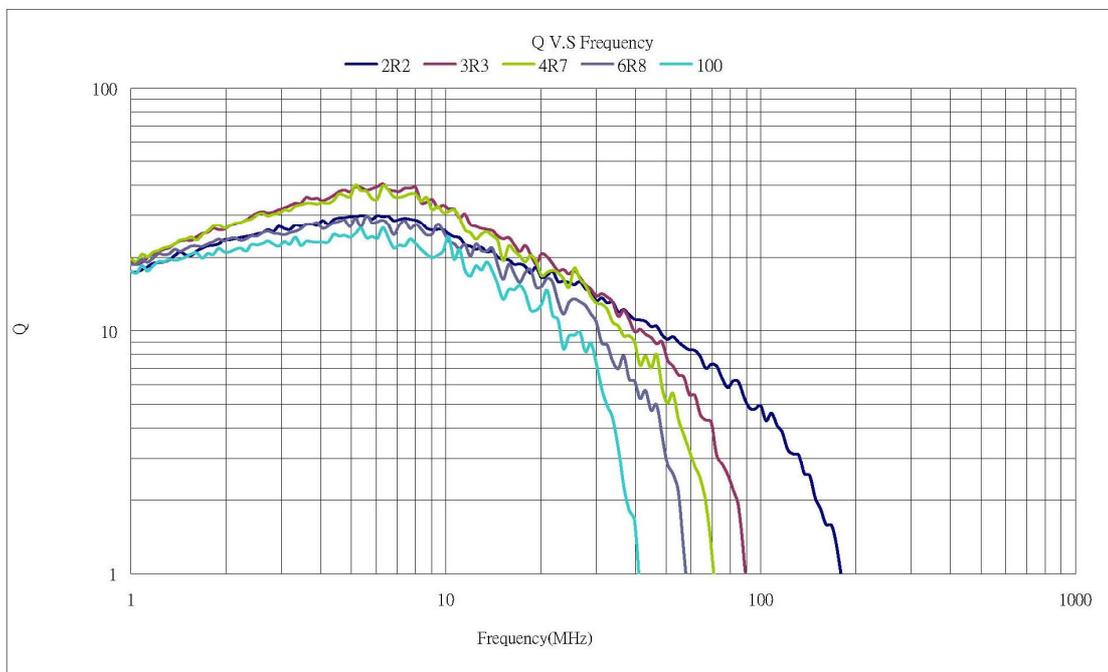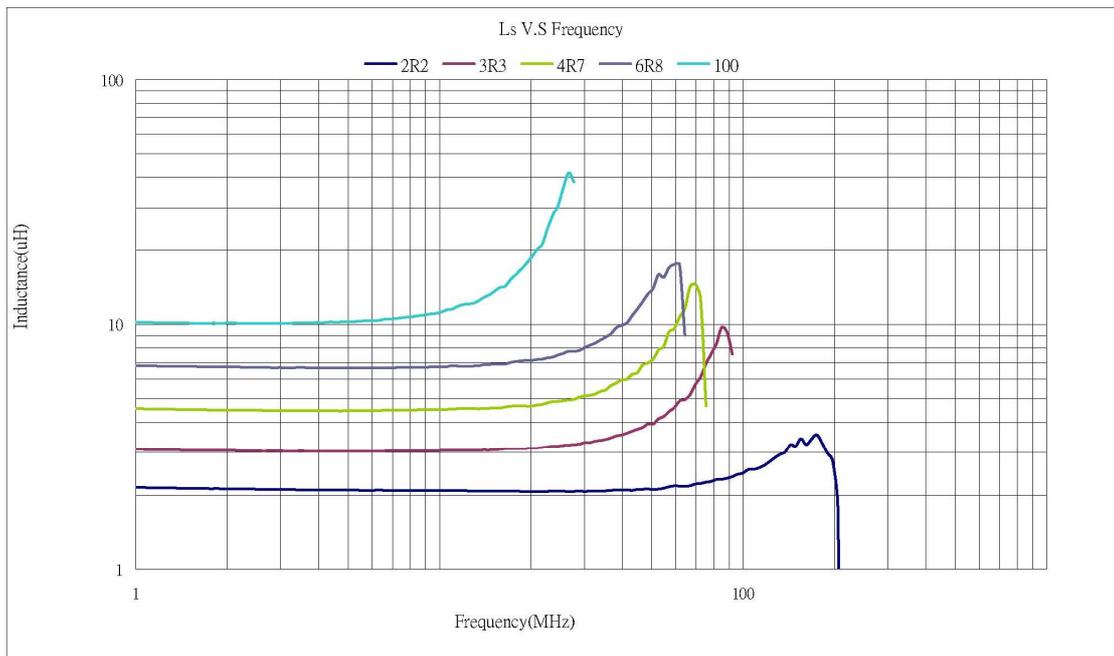

# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I

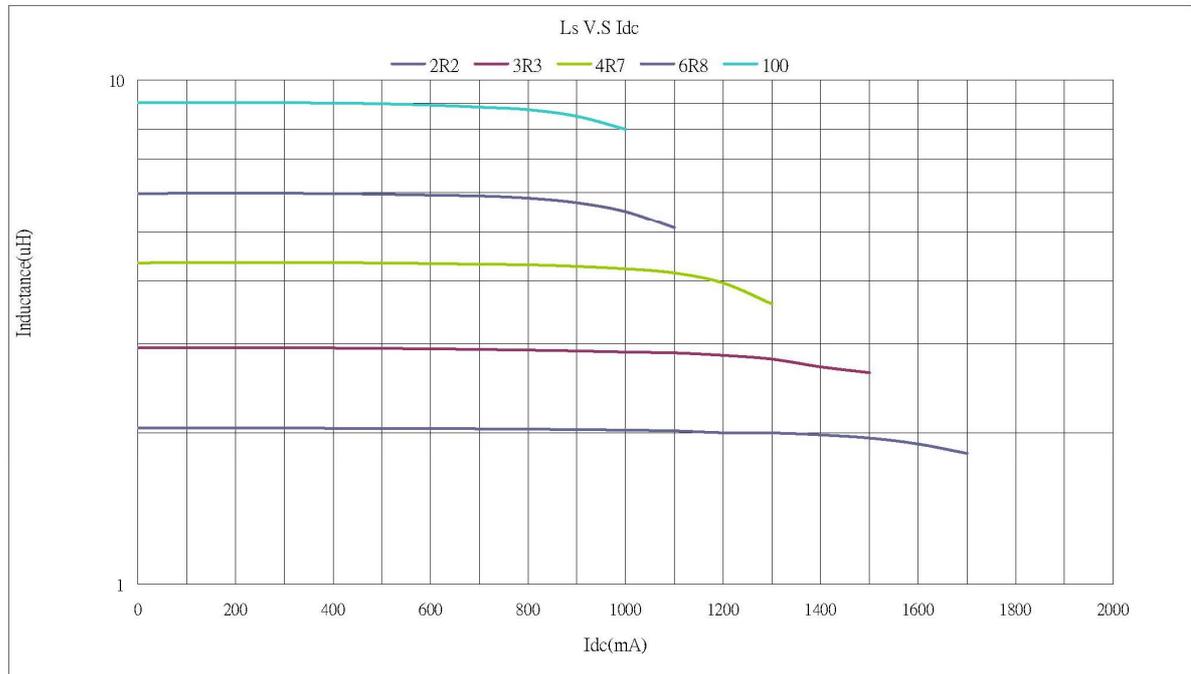

## 5. Material list

Item	Material
Core	Ferrite core
Wire	Copper wire
Epoxy	UV Epoxy

# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I



## 6. Reliability Test

Item	Specifications	Test conditions
Solderability	The metalized area must have 90% minimum solder coverage.	Dip pads in flux and dip in solder pot( 96.5 Sn/3.5 Ag solder) at 255°C ±5°C.
Resistance to soldering heat	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be reflowed onto a PC board using 96.5 Sn/3.5 Ag solder paste. Solder process shall be at a maximum temperature of 260°C. For 96.5 Sn/3.5 Ag solder paste:>217°C for 90 seconds
Vibration	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Solder specimen inductor on the test printed circuit board. Apply vibrations in each of the x,y and z directions for 2 hours for a total of 6 hours. Frequency : 10~50 Hz Amplitude : 1.5mm
High temperature resistance	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to temperature 105±2°C for 500±12 hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Static Humidity	Inductors must not have a shorted or openwinding.	Inductors shall be subjected to temperature 85±2°C and 90 to 95%RH. for ten 24-hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Component adhesion (push test)	Inductors shall be subjected to 1.8Kg	Inductors shall be reflow soldered (255°C ±5°C for 10 seconds) to a tinned copper substrate. A force gauge shall be applied to the side of the component. The device must withstand the stated force without a failure of the termination.

# PRODUCT SPECIFICATION

SPEC. NO.

T-0638-006I



Item	Specifications	Test conditions
Low temperature resistance	<p>There must be no case deformation or change in dimensions.</p> <p>Inductance must not change more than the stated tolerance.</p>	<p>Inductors shall be subjected to temperature <math>-25\pm 2^{\circ}\text{C}</math> for <math>500\pm 12</math> hours.</p> <p>Measure the test items after leaving the inductors at room temperature and humidity for 1 to 2 hours.</p>
Resistance to solvent	<p>There must be no case deformation, change in dimensions, or obliteration of marking.</p>	<p>Inductors must withstand 6 minutes of alcohol or water.</p>
Thermal Cycle	<p>There must be no case deformation or change in dimensions.</p> <p>Inductance must not change more than the stated tolerance.</p>	<p>Inductors shall be subjected to 10 cycles to the the following temperature cycle:</p> <div data-bbox="938 981 1362 1279" style="text-align: center;"> <p>The diagram illustrates a temperature cycle between 105°C and -25°C. The cycle consists of a 30-minute ramp up from -25°C to 105°C, a 3-minute dwell at 105°C, a 3-minute ramp down to -25°C, and a 30-minute dwell at -25°C. The total duration of one cycle is 76 minutes.</p> </div> <p>Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.</p>

# PRODUCT SPECIFICATION

SPEC. NO.


T-0638-006I



## 7. Packaging

The packaging must be done not to receive any damage during transporting and storing.


### 7-1 Tape dimensions

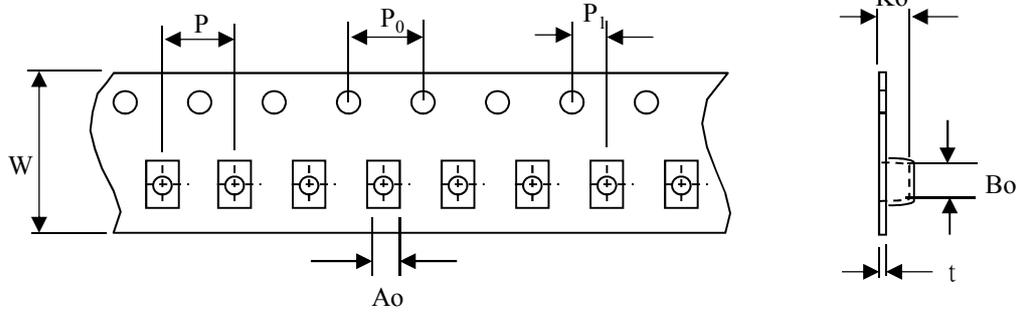

(Dimensions in mm; Tolerance :  $\pm 0.1$ )

Symbol	W	P	$P_0$	$P_1$	$A_o$	$B_o$	$K_o$	t
Dimension	8	4	4	2	2.88	3.72	2.5	0.26


### 7-2 Reel dimensions

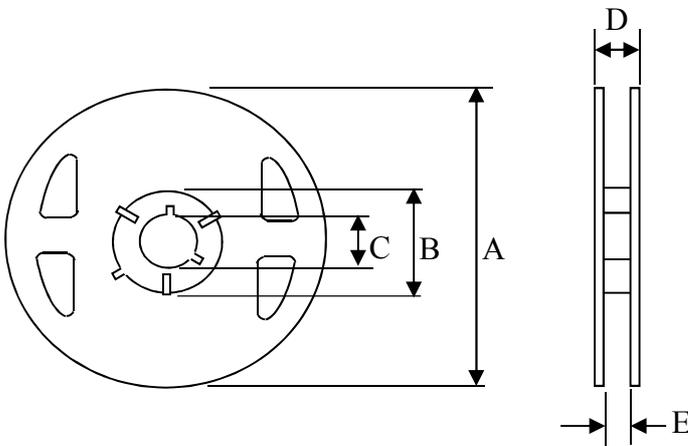

(Dimensions in mm)

Symbol	T
A	180
B	60
C	13
D	14.4
E	8.4

### 7-3 Tapping figure

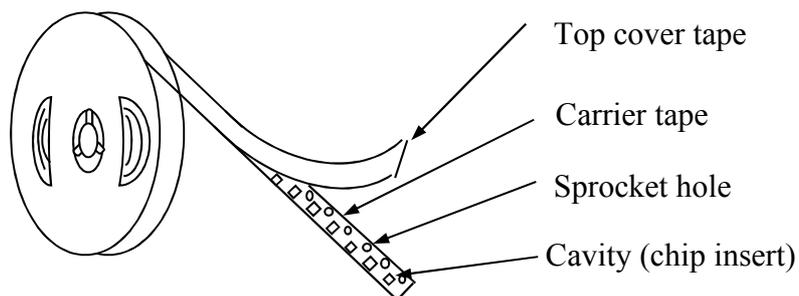

# PRODUCT SPECIFICATION


SPEC. NO.

T-0638-006I



## 7-4 Packaging Form

There shall not continuation more than two vacancies of the product.

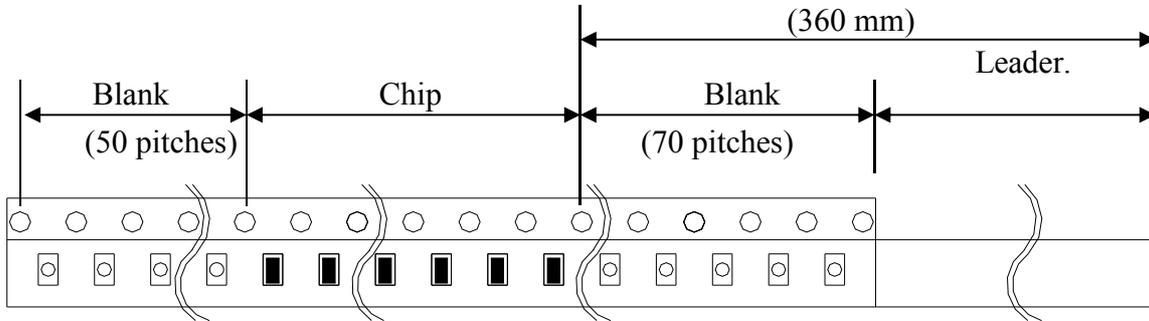


## 7-5 Cover Tape Peel Strength

The force for tearing off cover tape is 0.1~0.6(N) in the arrow direction at the following conditions:

Temperature : 5 ~ 35°C

Humidity : 45 ~ 85%

Atmospheric pressure : 860 ~ 1060 hpa

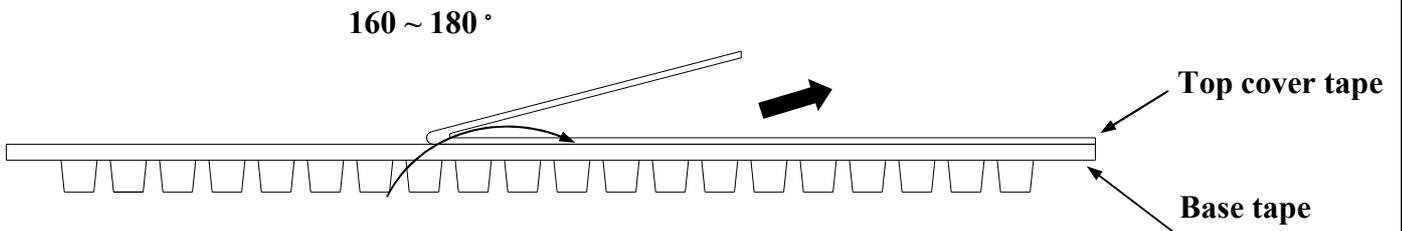

## 7-6 Packing Quantity

φ180 mm reel type : 2,000 pcs./reel

# PRODUCT SPECIFICATION


SPEC. NO.

T-0638-006I



## 8. Recommended Soldering Conditions (Please use this product by reflow soldering)


### 8-1 Recommended Footprint

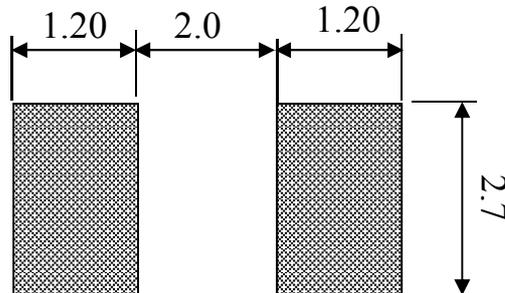

Unit: mm

### 8-2 Recommended Reflow Pattern

Reflow at 260°C/3 Cycles

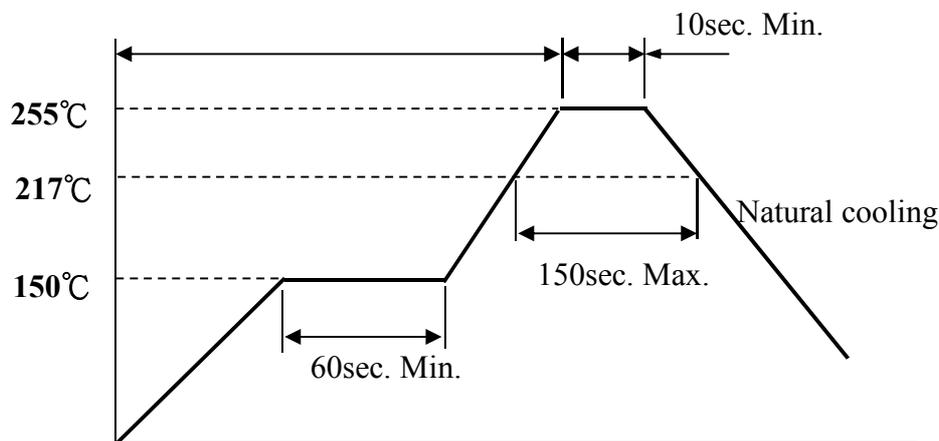

### 8-3 Iron Soldering

Use a solder iron of less than 30W when soldering, do not allow the soldering iron tip directly touch the Ceramic body outside of terminal electrode.

5 seconds max. at 260°C.

## 9. Attention in Case of Using

In case of using product, please avoid following matters:

Splashing water or salt water

Dew condenses

Toxic gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)

Vibrations or shocks which exceed the specified condition

Please be careful for the stress to this product by board flexure or something after the mounting.

## 10. Others

10-1 Operating temperature range : Ferrite Series :-25~+105°C

10-2 Storage condition : Temperature 20°~25°C, Relative Humidity 40%~60%

10-3 Recommended wire wound inductors should be used within 6 months from the time of delivery.