

HITACHI

H2570

- 16 character x 1 line
- Controller LSI HD44780 is built-in (See page 115).
- +5V single power supply

MECHANICAL DATA (Nominal dimensions)

Module size 80W x 36H x 12D (max) mm
 Effective display area 64.5W x 13.8H mm
 Character size (5 x 10 dots) 3.15W x 7.9H mm
 Character pitch 3.75 mm
 Dot size 0.55W x 0.7H mm
 Weight about 25g

ABSOLUTE MAXIMUM RATINGS

	min.	max.
Power supply for logic ($V_{DD}-V_{SS}$)	0	6.5 V
Power supply for LCD drive ($V_{DD}-V_O$)	0	6.5 V
Input voltage (V_i)	V_{SS}	V_{DD} V
Operating temperature (T_a)	0	50°C
Storage temperature (T_{stg})	-20	70°C

ELECTRICAL CHARACTERISTICS

$T_a = 25^\circ\text{C}$, $V_{DD} = 5.0 \text{ V} \pm 0.25 \text{ V}$

Input "high" voltage (V_{IH}) 2.2 V min.
 Input "low" voltage (V_{IL}) 0.6 V max.
 Output high voltage (V_{OH}) ($I_{OH} = 0.2 \text{ mA}$) . . . 2.4 V min.
 Output low voltage (V_{OL}) ($I_{OL} = 1.6 \text{ mA}$) . . . 0.4 V max.
 Power supply current (I_{DD}) ($V_{DD} = 5.0 \text{ V}$) . . 0.5 mA typ.
 2.0 mA max.

Power supply for LCD drive (Recommended) ($V_{DD}-V_O$)
 Duty = 1/8 Duty = 1/11
 $T_a = 0^\circ\text{C}$ 3.95 4.15 V typ.
 $T_a = 25^\circ\text{C}$ 3.7 3.8 V typ.
 $T_a = 50^\circ\text{C}$ 3.3 3.3 V typ.

OPTICAL DATA See page 5.



INTERNAL PIN CONNECTION



Pin No.	Symbol	Level	Function
1	V_{SS}	—	0V
2	V_{DD}	—	+5V
3	V_O	—	—
4	RS	H/L	L: Instruction code input H: Data input
5	R/W	H/L	H: Data read (LCD module → MPU) L: Data write (LCD module → MPU)
6	E	H, H → L	Enable signal
7	DB0	H/L	Data bus line Note (1), (2)
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	

Notes:

In the HD44780, the data can be sent in either 4-bit 2-operation or 8-bit 1-operation so that it can interface to both 4 and 8 bit MPU's.

- (1) When interface data is 4 bits long, data is transferred using only 4 buses of DB₄~DB₇, and DB₀~DB₃ are not used. Data transfer between the HD44780 and the MPU completes when 4-bit data is transferred twice. Data of the higher order 4 bits (contents of DB₄~DB₇, when interface data is 8 bits long) is transferred first and then lower order 4 bits (contents of DB₀~DB₃, when interface data is 8 bits long).
- (2) When interface data is 8 bits long, data is transferred using 8 data buses of DB₀~DB₇.

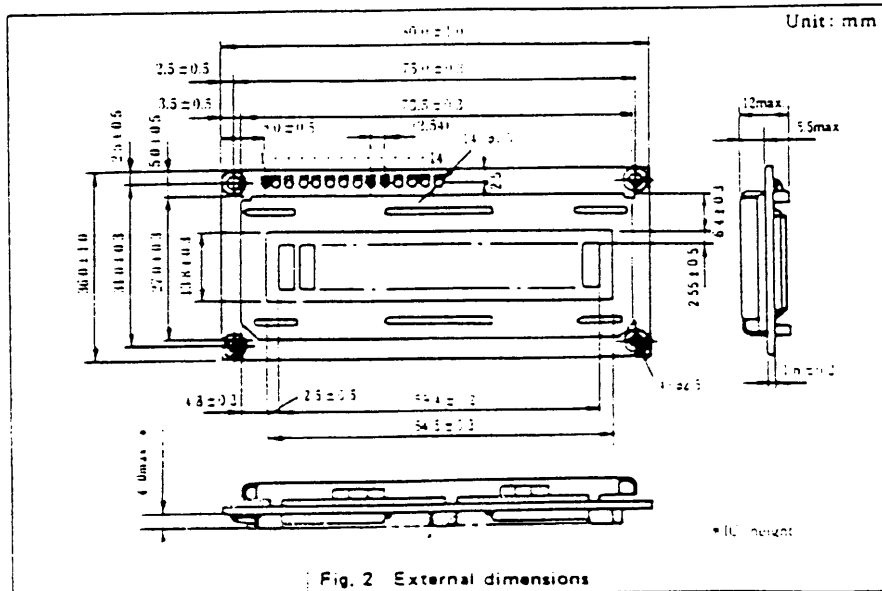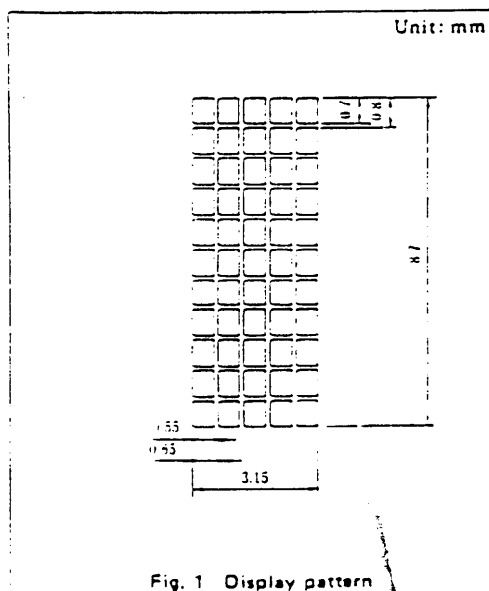

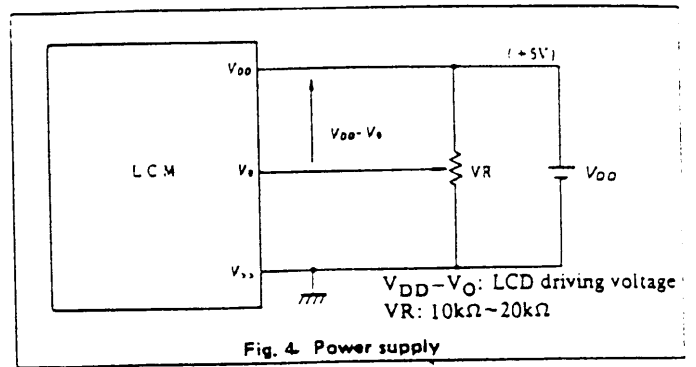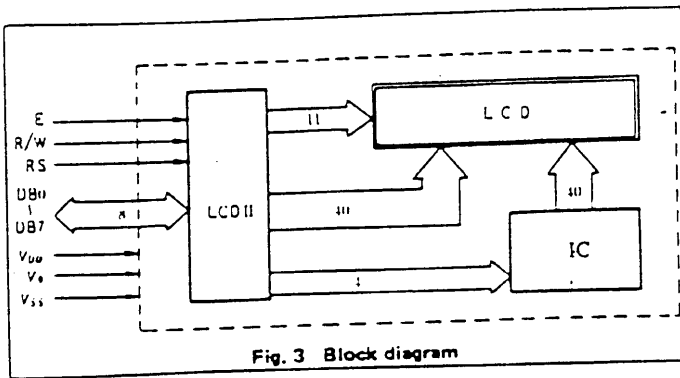

TIMING CHARACTERISTICS

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Enable cycle time	t_{cyc}	Fig. 5, Fig. 6	1.0	—	—	μs
Enable pulse width	$PWEH$	Fig. 5, Fig. 6	450	—	—	ns
Enable rise/fall time	t_{Er}, t_{Ef}	Fig. 5, Fig. 6	—	—	25	ns
RS, R/W set up time	t_{AS}	Fig. 5, Fig. 6	140	—	—	ns
Data delay time	t_{DOR}	Fig. 6	—	—	320	ns
Data set up time	t_{DSW}	Fig. 5	195	—	—	ns
Hold time	t_H	Fig. 5, Fig. 6	20	—	—	ns

