
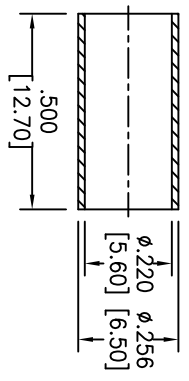
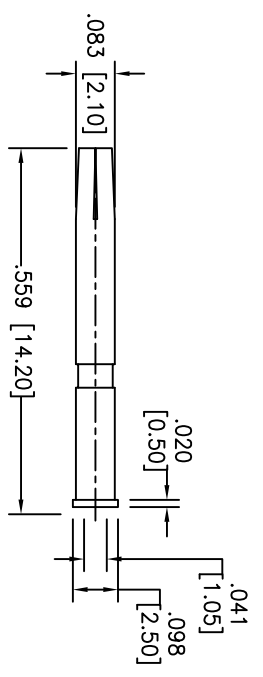


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	10078	RELEASED	3/17/10	
A	10078	REVISED DIM.	8/18/10	

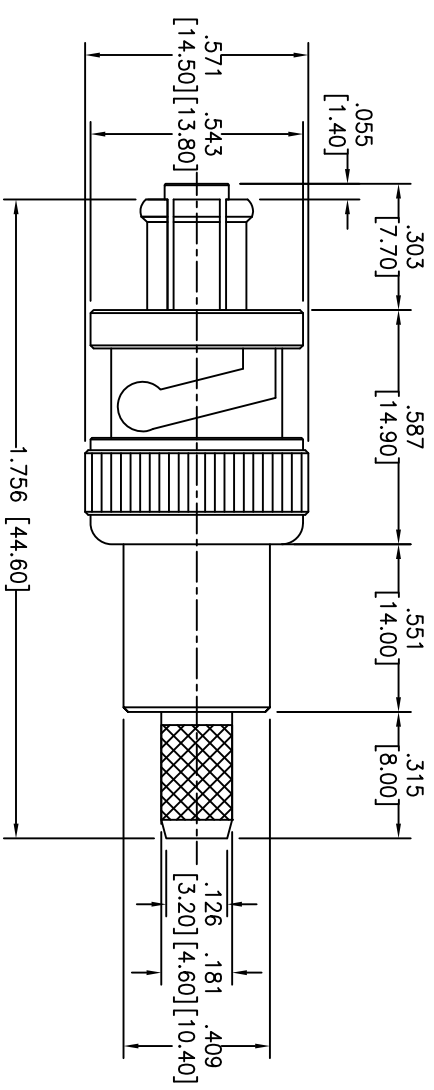

GASKET	RUBBER	ORANGE
RETAINING RING	SK-5	NICKEL
SPRING	SK-5	NICKEL
WASHER	IRON	NICKEL
SHELL	BRASS	NICKEL
FERRULE	BRASS	NICKEL
DIELECTRIC	TEFLON	NONE
PIN	BRASS	GOLD
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms

Frequency range: DC up to 300MHz

Working Voltage: 3500 VRMS max.

Dielectric Withstanding Voltage: 5000 VRMS min.

Contact Resistance: 2 Milliohms max. (Inner Conductor)

Insulator Resistance: 5000 Megohms min.

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XXX ± .015
 .XXX ± .015 Ø.XXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SHV MALE CRIMP FOR RG58

APPROVALS	DATE
DRAWN DY	3/17/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	RF-46-01-T-01-50	A
REF:	S0001T	SCALE: NTS
SHEET	1	OF 1