



SS32-PJ THRU SS320-PJ

SCHOTTKY BARRIER RECTIFIERS

FEATURES


- ◆ For surface mount applications
- ◆ High forward surge current capability
- ◆ Low power loss, high efficiency
- ◆ Metal silicon junction, majority carriers conduction

MECHANICAL DATA

- ◆ Case: SMA molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.06 grams

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

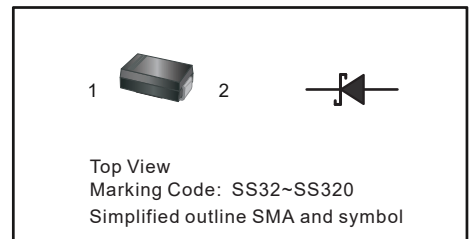

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	SS32-PJ	SS34-PJ	SS34A-PJ	SS36-PJ	SS38-PJ	SS310-PJ	SS312-PJ	SS315-PJ	SS320-PJ	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	45	60	80	100	120	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	31.5	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	45	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current at $T_C=75^\circ\text{C}$	$I_{F(AV)}$	3.0									A
Peak Forward Surge Current (Note1)	I_{FSM}	80									A
Maximum Forward Voltage at 3.0 A	V_F	0.55	0.70			0.85		0.95			V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	0.5 5				0.3 3					mA
Typical Junction Capacitance (Note2)	C_J	450				400					pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$	70									$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +125									$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150									$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



SS32-PJ THRU SS320-PJ SCHOTTKY BARRIER RECTIFIERS

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

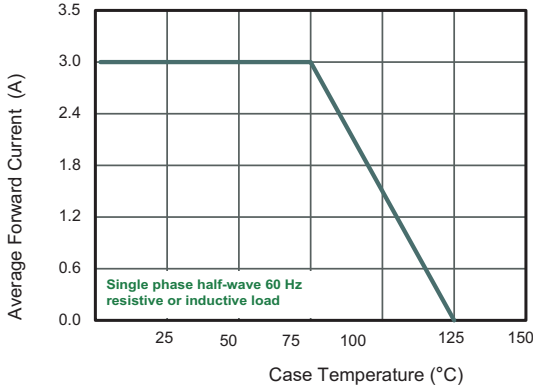


Fig.2 Typical Reverse Characteristics

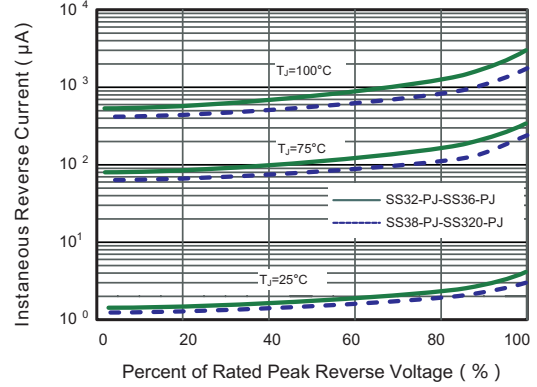


Fig.3 Typical Forward Characteristic

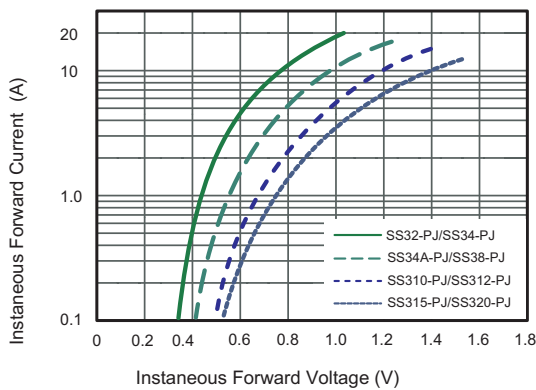


Fig.4 Typical Junction Capacitance

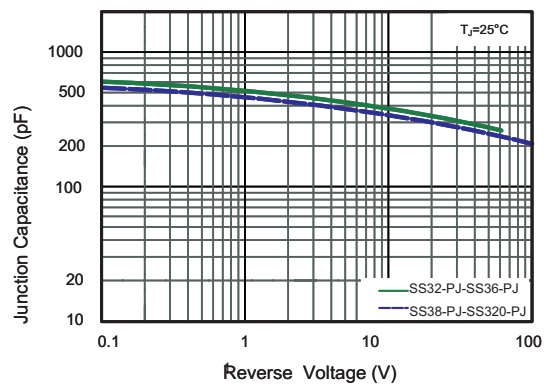


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


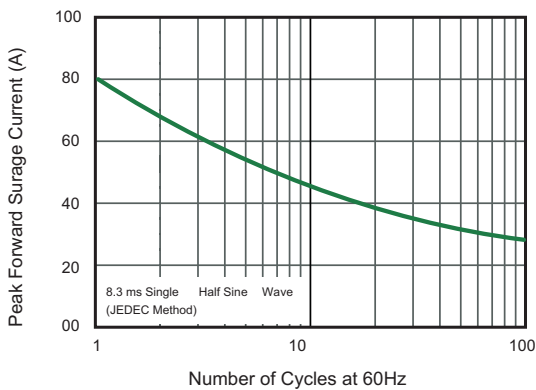


Fig.5- Typical Transient Thermal Impedance




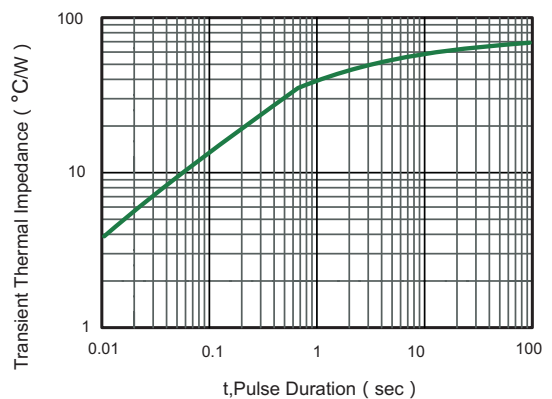

SS32-PJ THRU SS320-PJ SCHOTTKY BARRIER RECTIFIERS

PACKAGE OUTLINE

SMA

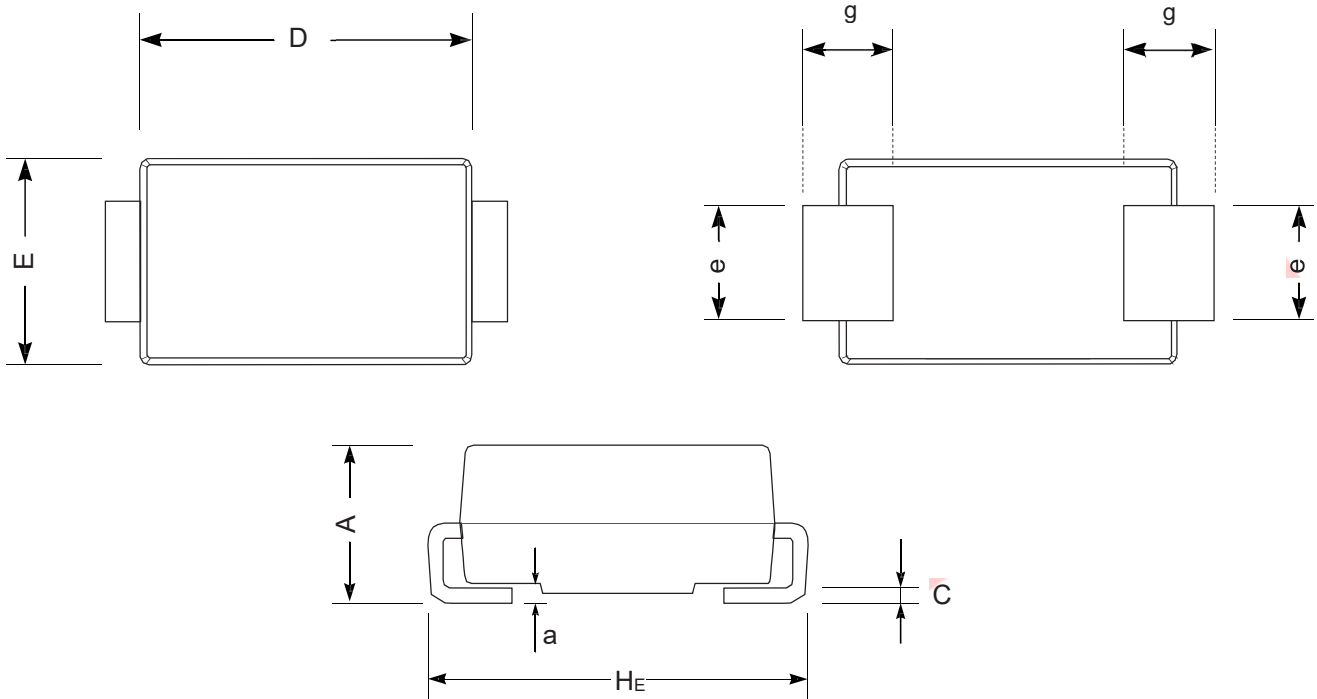

UNIT		A	D	E	HE	C	e	g	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	
mil	max	87	181	106	205	12	63	59	12
	min	75	157	91	185	6	51	35	

ORDERING INFORMATION

Device	Package	Shipping
SS32-PJ thru SS320-PJ	SMA	5,000/ Tape & Reel (13 inches)