SGM8581
Single-Supply, Single Rail-to-Rail I/O Precision Operational Amplifier

PRODUCT DESCRIPTION

The SGM8581 is a single rail-to-rail input and output precision operational amplifier which has low input offset voltage, and bias current. It is guaranteed to operate from 2.5V to 5.5V single supply.

The rail-to-rail input and output swings provided by the SGM8581 make both high-side and low-side sensing easy. The combination of characteristics makes the SGM8581 good choices for temperature, position and pressure sensors, medical equipment and strain gauge amplifiers, or any other 2.5V to 5.5V application requiring precision and long term stability.

The SGM8581 is specified for the extended industrial/ automotive (-40℃ to +125℃) temperature range. The SGM8581 is available in the Green SOT-23-5, SOIC-8 and MSOP-8 packages.

APPLICATIONS


Temperature Measurements
Pressure Sensors
Precision Current Sensing
Electronic Scales
Strain Gauge Amplifiers
Medical Instrumentation
Thermocouple Amplifiers
Handheld Test Equipment

FEATURES

- **Low Offset Voltage: 25μV (TYP)**
- **Rail-to-Rail Input and Output Swing**
- **2.5V to 5.5V Single Supply Operation**
- **Voltage Gain: 145dB (TYP) at +5V**
- **PSRR: 120dB (TYP)**
- **CMRR: 90dB (TYP)**
- **Ultra Low Input Bias Current: 15pA**
- **Low Supply Current: 445μA at +5V**
- **Overload Recovery Time: 70μs (at V_S = +5V)**
- **No External Capacitors Required**
- **-40℃ to +125℃ Operating Temperature Range**
- **Available in Green SOT-23-5, SOIC-8 and MSOP-8 Packages**


PIN CONFIGURATIONS (TOP VIEW)

SGM8581



SOT-23-5

SGM8581

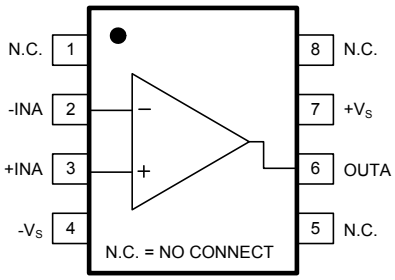

SOIC-8/MSOP-8

PACKAGE/ORDERING INFORMATION

MODEL	ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
SGM8581	SGM8581XN5G/TR	SOT-23-5	Tape and Reel, 3000	S0BXX
	SGM8581XS8G/TR	SOIC-8	Tape and Reel, 2500	SGM8581XS8
	SGM8581XMS8G/TR	MSOP-8	Tape and Reel, 3000	SGM8581XMS8

NOTE: Order number and package marking are defined as the follow:

ORDER NUMBER

SGM8581 X X G / TR

- **Tape and Reel**
- **Green Product**
- **Package Type**
  - N5 SOT-23-5
  - S8 SOIC-8
  - MS8 MSOP-8
- **Operating Temperature Range**
  - X -40℃ to +125℃

MARKING INFORMATION

S0B X X

- Date code - month ("A" = Jan. "B" = Feb. ··· "L" = Dec.)
- Date code - year ("9" = 2009, "A" = 2010 ···)

For example: S0B9A (2009, January)

ABSOLUTE MAXIMUM RATINGS

Supply Voltage. 6V
Input Voltage . . . . . $-V_S$ to $(+V_S)$ + 0.1V
Differential Input Voltage. . . . . -5V to 5V
Storage Temperature Range . . . . . -65℃ to +150℃
Junction Temperature. . . . . 150℃
Operating Temperature Range. . . . . -40℃ to +125℃
Lead Temperature (Soldering 10sec)
. . . . . .260℃
ESD Susceptibility
HBM (SOT-23-5). 6000V
HBM (SOIC-8). 7000V
HBM (MSOP-8). 6000V
MM. 400V

NOTE:
Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don’t pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.

ELECTRICAL CHARACTERISTICS

(V_S = +5V, V_{CM} = +2.5V, V_O = +2.5V, T_A = +25℃, unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT CHARACTERISTICS					
Input Offset Voltage (V_{OS})			25	100	μV
	-40℃ ≤ T_A ≤ +125℃			106	
Input Bias Current (I_B)			15		pA
Input Offset Current (I_{OS})			10		pA
Input Voltage Range		0		5	V
Common Mode Rejection Ratio (1) (CMRR)	V_{CM} = 0V to 5V	80	90		dB
	-40℃ ≤ T_A ≤ +125℃	62			
Large Signal Voltage Gain (A_{VO})	R_L = 10kΩ, V_O = 0.3V to 4.7V	95	145		dB
	-40℃ ≤ T_A ≤ +125℃	91			
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta_T$)	-40℃ ≤ T_A ≤ +125℃		100		nV/℃
OUTPUT CHARACTERISTICS					
Output Voltage High (V_{OH})	R_L = 100kΩ to -V_S	4.99	4.998		V
	-40℃ ≤ T_A ≤ +125℃	4.979			
	R_L = 10kΩ to -V_S	4.98	4.994		V
	-40℃ ≤ T_A ≤ +125℃	4.96			
Output Voltage Low (V_{OL})	R_L = 100kΩ to +V_S		2	10	mV
	-40℃ ≤ T_A ≤ +125℃			11	
	R_L = 10kΩ to +V_S		6	15	mV
	-40℃ ≤ T_A ≤ +125℃			18	
Short Circuit Limit (I_{SC})	V_O = 2.5V, R_L = 10Ω to GND	40	45		mA
	-40℃ ≤ T_A ≤ +125℃	26			
POWER SUPPLY					
Power Supply Rejection Ratio (1) (PSRR)	V_S = 2.5V to 5.5V	90	120		dB
	-40℃ ≤ T_A ≤ +125℃	73			
Quiescent Current (I_Q)	V_O = +V_S/2		445	700	μA
	-40℃ ≤ T_A ≤ +125℃			845	
DYNAMIC PERFORMANCE					
Gain-Bandwidth Product (GBP)	A_V = +100		1.45		MHz
Slew Rate (SR)	A_V = +1, R_L = 10kΩ, 2V Output Step		0.75		V/μs
Overload Recovery Time	A_V = -100, R_L = 10kΩ, V_{IN} = 200mV (RET to GND)		0.07		ms
NOISE PERFORMANCE					
Voltage Noise (e_n p-p)	0.1Hz to 10Hz		0.85		μV_{P-P}
Voltage Noise Density (e_n)	f = 1kHz		47.5		nV/$\sqrt{Hz}$

NOTE 1: PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.

ELECTRICAL CHARACTERISTICS


(V_S = +2.5V, V_{CM} = +1.25V, V_O = +1.25V, T_A = +25℃, unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT CHARACTERISTICS					
Input Offset Voltage (V_{OS})			25	100	μV
	-40℃ ≤ T_A ≤ +125℃			127	
Input Bias Current (I_B)			15		pA
Input Offset Current (I_{OS})			10		pA
Input Voltage Range		0		2.5	V
Common Mode Rejection Ratio (1) (CMRR)	V_{CM} = 0V to 2.5V	75	90		dB
	-40℃ ≤ T_A ≤ +125℃	61			
Large Signal Voltage Gain (A_{VO})	R_L = 10kΩ, V_O = 0.3V to 2.4V	95	140		dB
	-40℃ ≤ T_A ≤ +125℃	91			
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta_T$)	-40℃ ≤ T_A ≤ +125℃		150		nV/℃
OUTPUT CHARACTERISTICS					
Output Voltage High (V_{OH})	R_L = 100kΩ to -V_S	2.49	2.498		V
	-40℃ ≤ T_A ≤ +125℃	2.473			
	R_L = 10kΩ to -V_S	2.48	2.497		V
	-40℃ ≤ T_A ≤ +125℃	2.46			
Output Voltage Low (V_{OL})	R_L = 100kΩ to +V_S		1	10	mV
	-40℃ ≤ T_A ≤ +125℃			11	
	R_L = 10kΩ to +V_S		3	15	mV
	-40℃ ≤ T_A ≤ +125℃			16	
Short Circuit Limit (I_{SC})	V_O = 1.25V, R_L = 10Ω to GND	20	27		mA
	-40℃ ≤ T_A ≤ +125℃	14			
POWER SUPPLY					
Power Supply Rejection Ratio (1) (PSRR)	V_S = 2.5V to 5.5V	90	120		dB
	-40℃ ≤ T_A ≤ +125℃	73			
Quiescent Current (I_Q)	V_O = +V_S/2		440	700	μA
	-40℃ ≤ T_A ≤ +125℃			786	
DYNAMIC PERFORMANCE					
Gain-Bandwidth Product (GBP)	A_V = +100		1.45		MHz
Slew Rate (SR)	A_V = +1, R_L = 10kΩ, 2V Output Step		0.75		V/μs
Overload Recovery Time	A_V = -100, R_L = 10kΩ, V_{IN} = 200mV (RET to GND)		0.04		ms
NOISE PERFORMANCE					
Voltage Noise (e_n p-p)	0.1Hz to 10Hz		0.9		μV_{P-P}
Voltage Noise Density (e_n)	f = 1kHz		77		$nV/\sqrt{Hz}$


NOTE 1: PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.

TYPICAL PERFORMANCE CHARACTERISTICS


Large Signal Transient Response at +5V

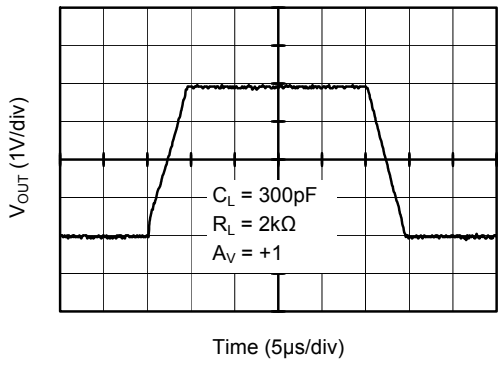


Large Signal Transient Response at +2.5V

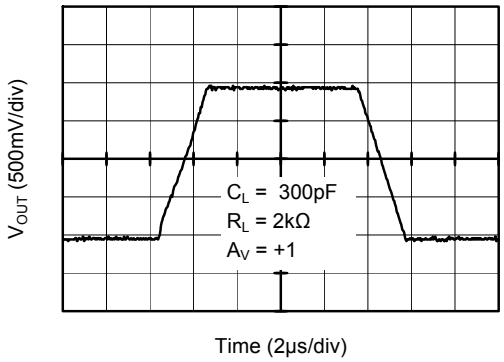


Small Signal Transient Response at +5V

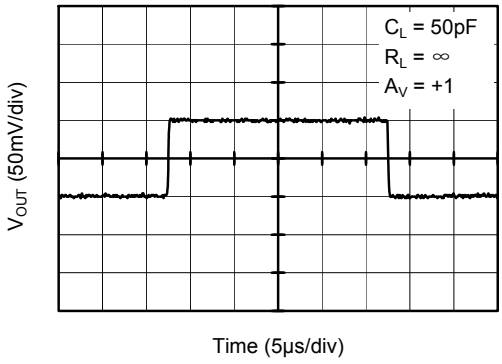


Small Signal Transient Response at +2.5V

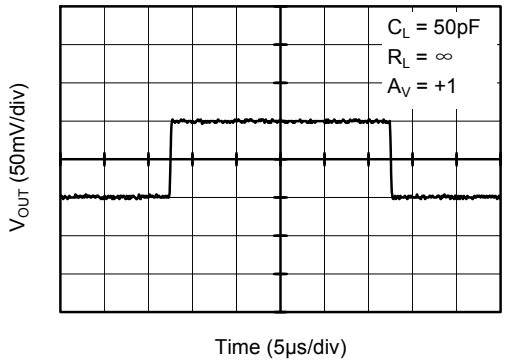

Closed Loop Gain vs. Frequency at +5V

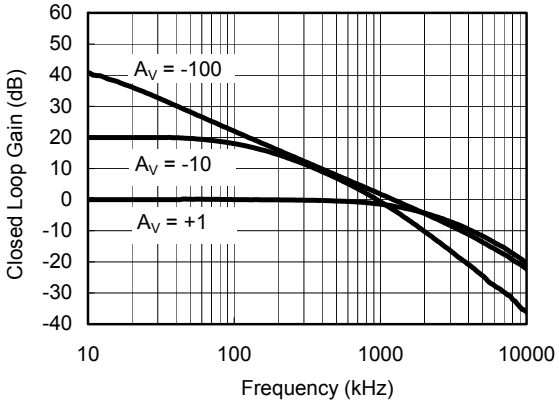


Closed Loop Gain vs. Frequency at +2.5V

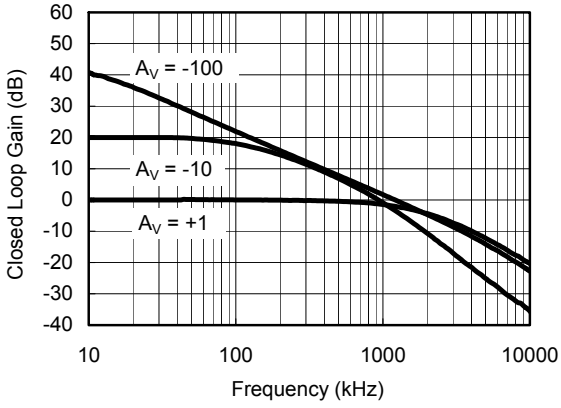


TYPICAL PERFORMANCE CHARACTERISTICS


0.1Hz to 10Hz Noise at +5V

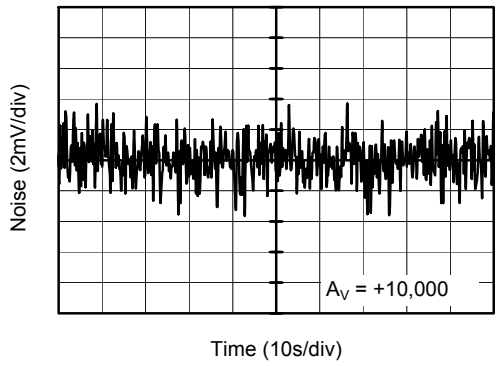


0.1Hz to 10Hz Noise at +2.5V

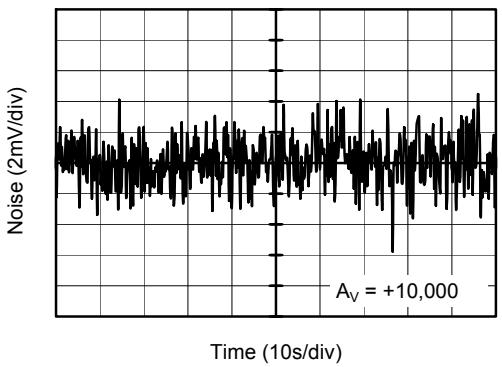


Negative Overvoltage Recovery

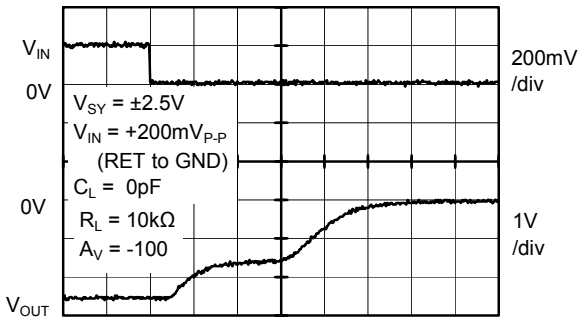


Positive Overvoltage Recovery

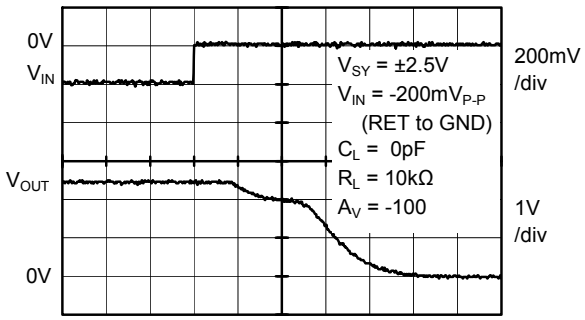

Open Loop Gain,Phase Shift vs. Frequency at +5V

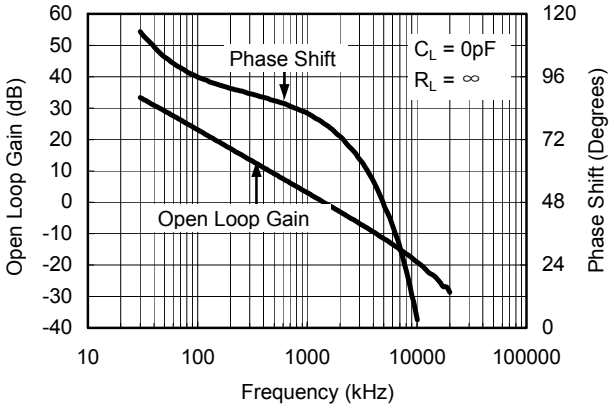


Open Loop Gain, Phase Shift vs. Frequency at +2.5V

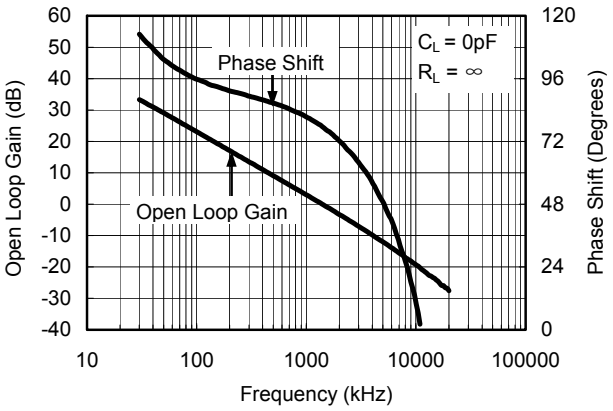


TYPICAL PERFORMANCE CHARACTERISTICS


Voltage Noise Density at +5V
from 0.1Hz to 2.5kHz

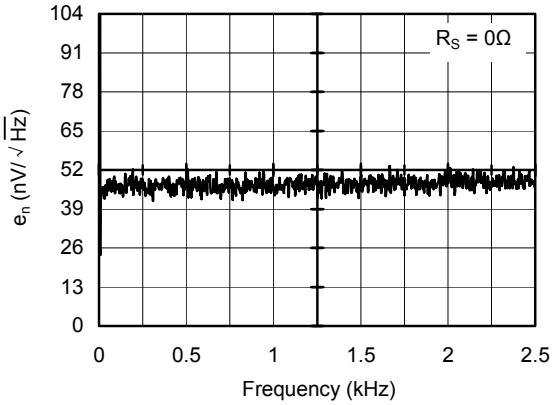


Voltage Noise Density at +2.5V
from 0.1Hz to 2.5kHz

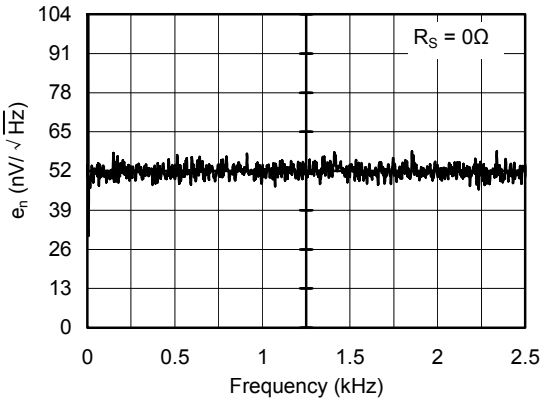


Voltage Noise Density at +5V
from 0.1Hz to 25kHz

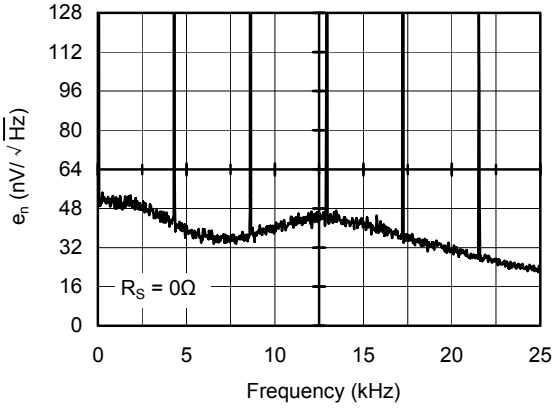


Voltage Noise Density at +2.5V
from 0.1Hz to 25kHz

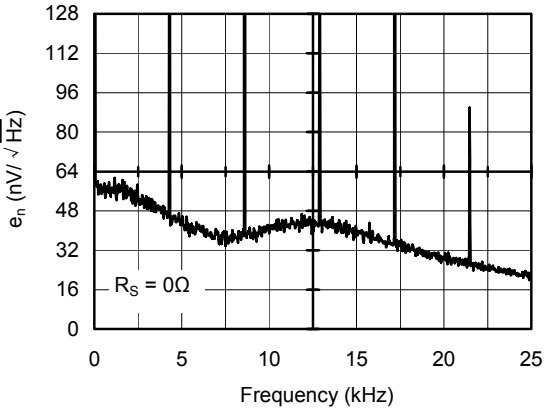


PSRR vs. Frequency at ±2.5V

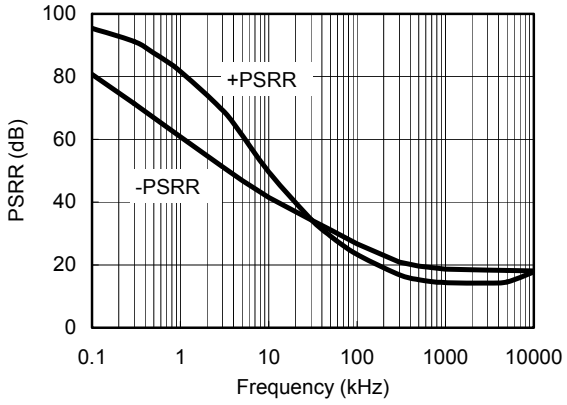



PSRR vs. Frequency at ±1.25V

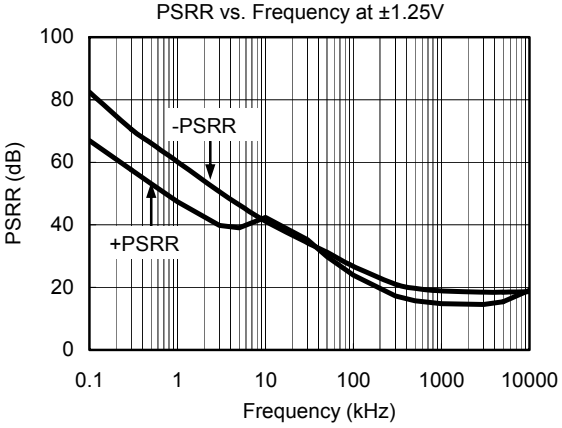


TYPICAL PERFORMANCE CHARACTERISTICS

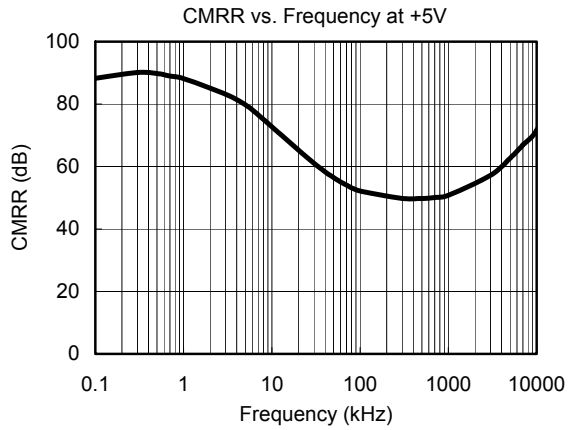

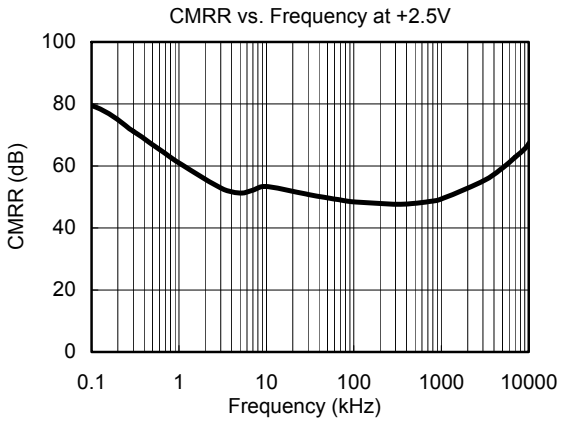


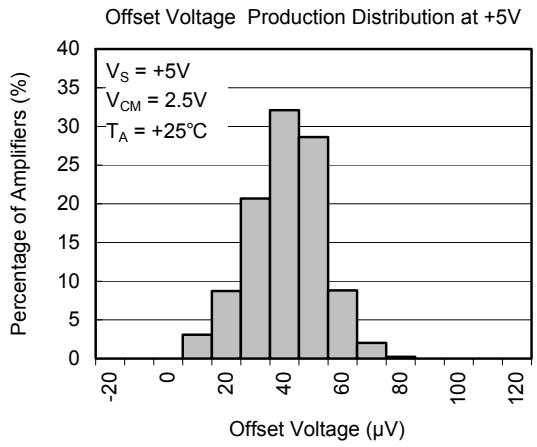


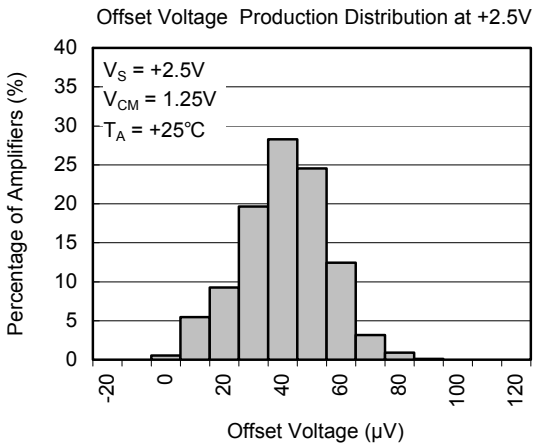


PACKAGE OUTLINE DIMENSIONS


SOT-23-5

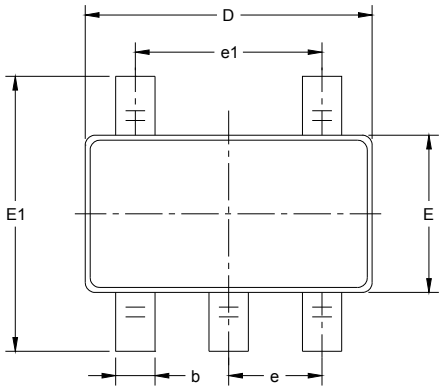

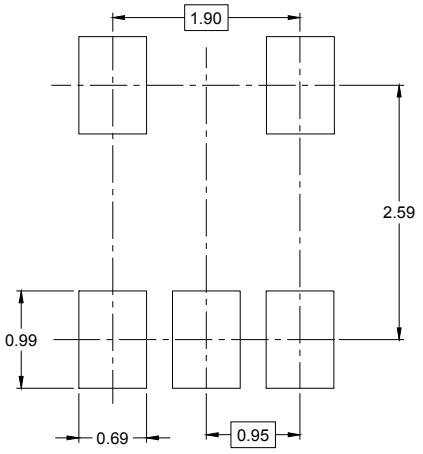

RECOMMENDED LAND PATTERN (Unit: mm)

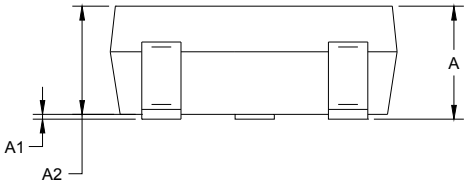


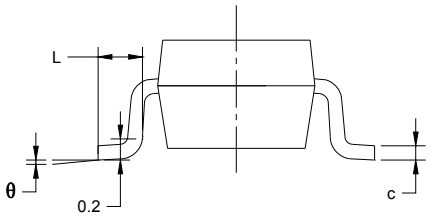


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°


PACKAGE OUTLINE DIMENSIONS


SOIC-8

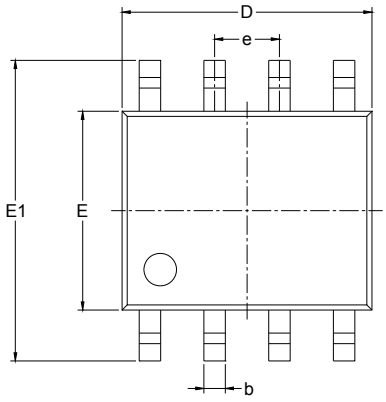

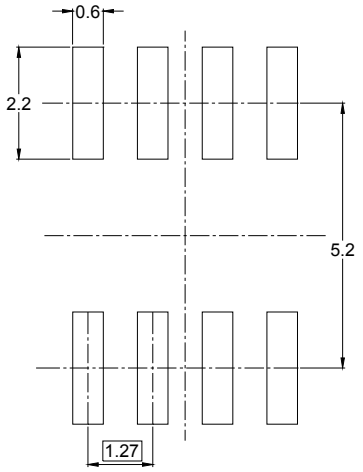

RECOMMENDED LAND PATTERN (Unit: mm)

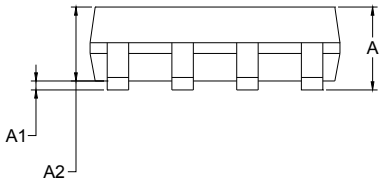


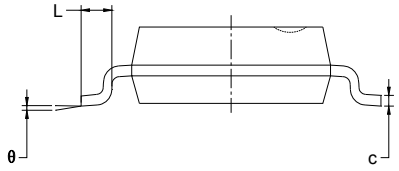


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°


PACKAGE OUTLINE DIMENSIONS


MSOP-8

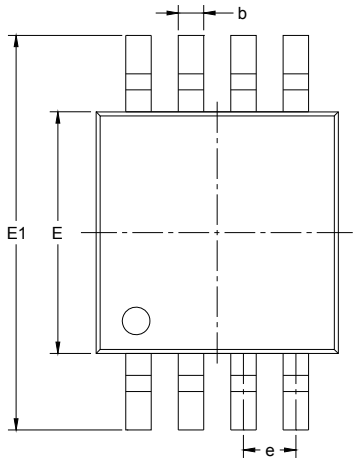

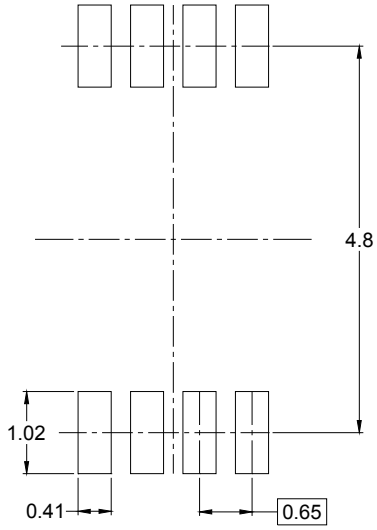

RECOMMENDED LAND PATTERN (Unit: mm)

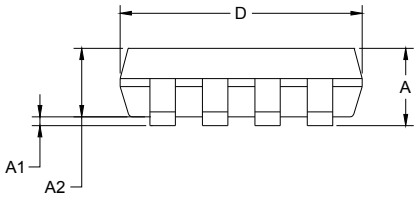


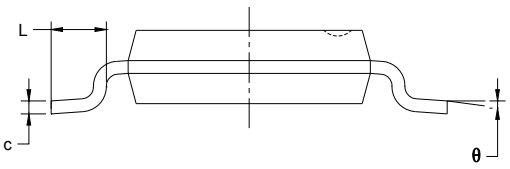


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

TAPE AND REEL INFORMATION

REEL DIMENSIONS

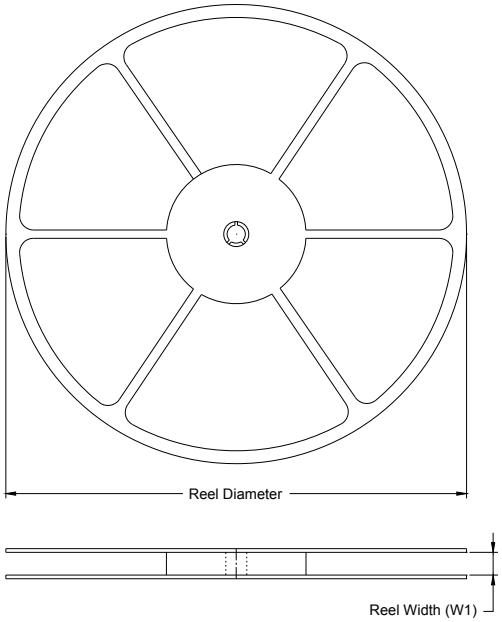

TAPE DIMENSIONS

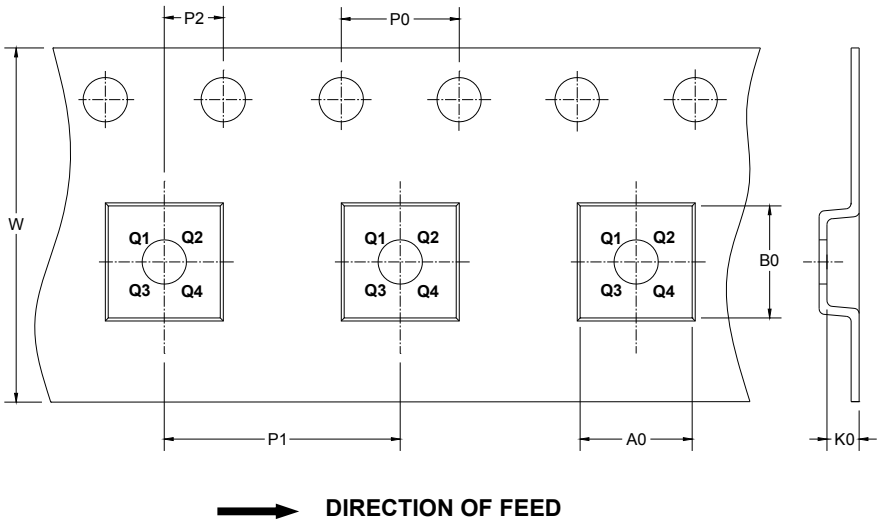


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7″	9.5	3.2	3.2	1.4	4.0	4.0	2.0	8.0	Q3
SOIC-8	13″	12.4	6.4	5.4	2.1	4.0	8.0	2.0	12.0	Q1
MSOP-8	13″	12.4	5.2	3.3	1.5	4.0	8.0	2.0	12.0	Q1

CARTON BOX DIMENSIONS

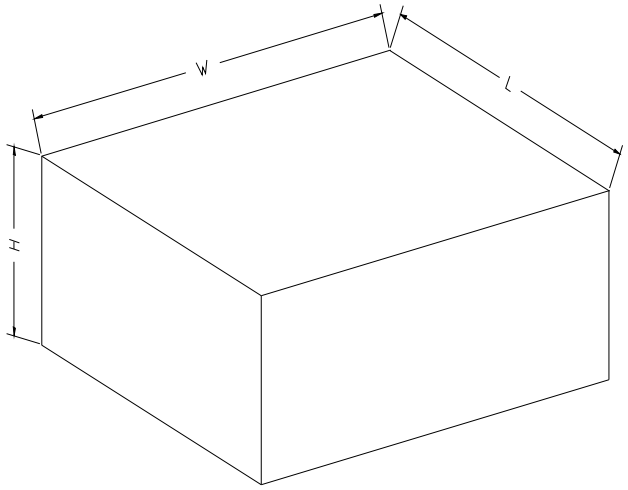

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7″ (Option)	368	227	224	8
7″	442	410	224	18
13″	386	280	370	5