ALPHA & OMEGA SEMICONDUCTOR, LTD


AO5600E
Complementary Enhancement Mode Field Effect Transistor


General Description
The AO5600E/L uses advanced trench technology MOSFETs to provide excellent $R_{DS(ON)}$ and low gate charge. The complementary MOSFETs may be used in H-bridge, Inverters and other applications.AO5600E and AO5600EL are electrically identical.

-RoHS compliant
-AO5600EL is Halogen Free

ESD PROTECTED!

Features
n-channel
V_{DS} (V) = 20V, I_D = 0.6A (V_{GS}=4.5V)
$R_{DS(ON)}$< 0.65Ω (V_{GS}= 4.5V)
$R_{DS(ON)}$< 0.75Ω (V_{GS}= 2.5V)
$R_{DS(ON)}$< 0.95Ω (V_{GS}= 1.8V)
p-channel
V_{DS} (V) = -20V, I_D = -0.5A (V_{GS}=-4.5V)
$R_{DS(ON)}$< 0.8Ω (V_{GS}= -4.5V)
$R_{DS(ON)}$< 1.0Ω (V_{GS}= -2.5V)
$R_{DS(ON)}$< 1.3Ω (V_{GS}= -1.8V)

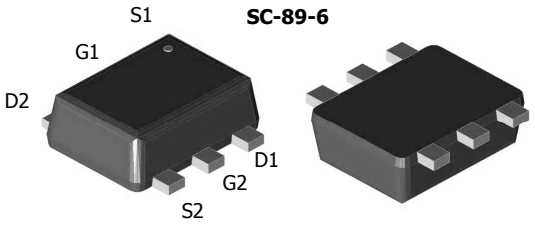

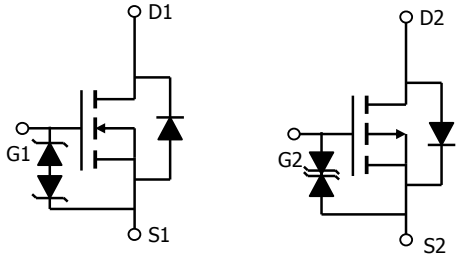

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Max n-channel	Max p-channel	Units
Drain-Source Voltage		V_{DS}	20	-20	V
Gate-Source Voltage		V_{GS}	±8		V
Continuous Drain Current [B,H]	T_C=25°C	I_D	0.6	-0.5	A
	T_C=100°C		0.4	-0.38	
Pulsed Drain Current [B]		I_{DM}	3	-1	
Power Dissipation	T_C=25°C	P_D	0.38	0.38	W
	T_C=100°C		0.24	0.24	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150		°C

Thermal Characteristics: n-channel and p-channel

Parameter		Symbol	Device	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	n-ch	275	330	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		n-ch	360	450	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	n-ch	300	350	°C/W
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	p-ch	275	330	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		p-ch	360	450	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	p-ch	300	350	°C/W

N-channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V	20			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=20V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±4.5V			±1	µA
		V_{DS}=0V, V_{GS}=±8V			±100	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	0.45	0.6	1	V
$I_{D(ON)}$	On state drain current	V_{GS}=4.5V, V_{DS}=5V	3			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=4.5V, I_D=0.5A		0.54	0.65	Ω
		T_J=125°C		0.81	1	
		V_{GS}=2.5V, I_D=0.5A		0.63	0.75	Ω
		V_{GS}=1.8V, I_D=0.3A		0.73	0.95	Ω
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=0.5A		1.5		S
V_{SD}	Diode Forward Voltage	I_S=0.1A,V_{GS}=0V		0.65	1	V
I_S	Maximum Body-Diode Continuous Current				0.4	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=10V, f=1MHz		35	45	pF
C_{oss}	Output Capacitance			8		pF
C_{rss}	Reverse Transfer Capacitance			6		pF
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	V_{GS}=4.5V, V_{DS}=10V, I_D=0.5A		0.63	1	nC
Q_{gs}	Gate Source Charge			0.08		nC
Q_{gd}	Gate Drain Charge			0.16		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=5V, V_{DS}=10V, R_L=50Ω, R_{GEN}=3Ω		4.5		ns
t_r	Turn-On Rise Time			3.3		ns
$t_{D(off)}$	Turn-Off DelayTime			70		ns
t_f	Turn-Off Fall Time			35		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=0.5A, dI/dt=100A/µs		8	10	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=0.5A, dI/dt=100A/µs		2		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in ^{2} FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using <300 µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in ^{2} FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

F. The maximum current rating is limited by bond-wires

Rev5: Oct 2008

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

N-Channel TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

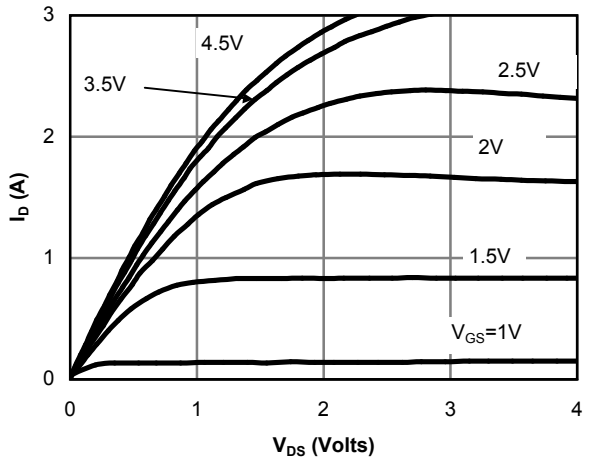


Figure 1: On-Region Characteristics

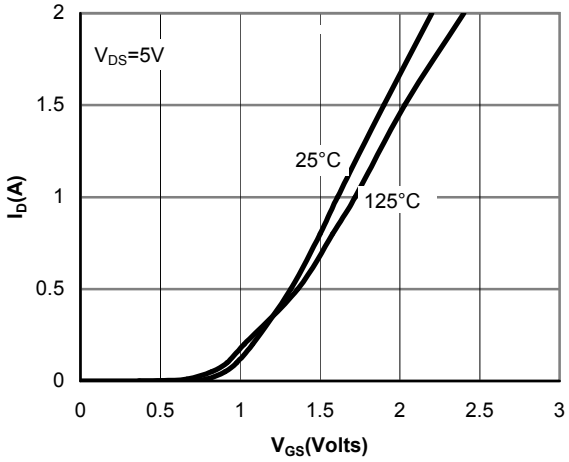


Figure 2: Transfer Characteristics

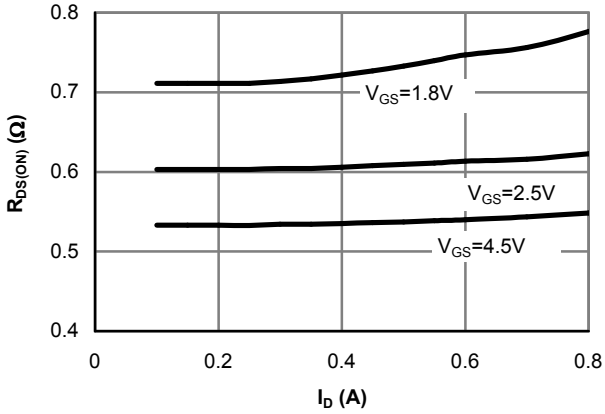


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

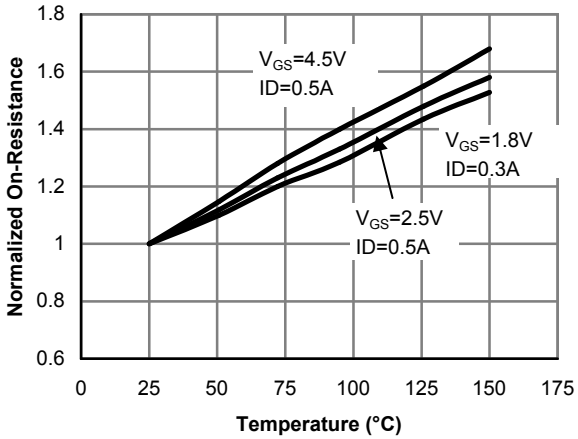


Figure 4: On-Resistance vs. Junction Temperature

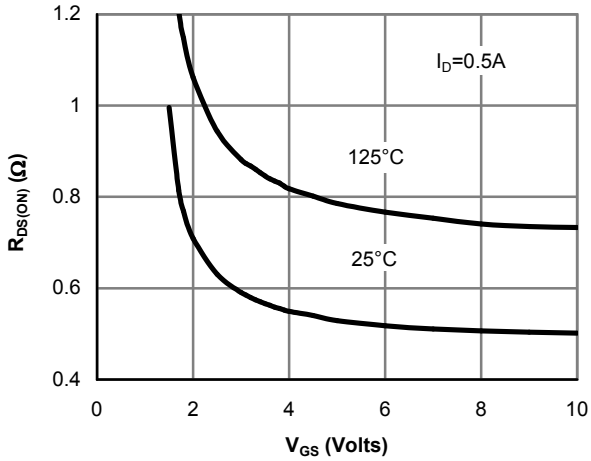


Figure 5: On-Resistance vs. Gate-Source Voltage

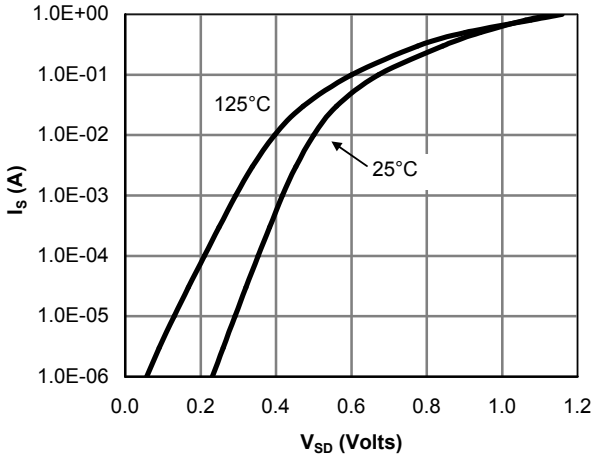


Figure 6: Body-Diode Characteristics

N-Channel TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

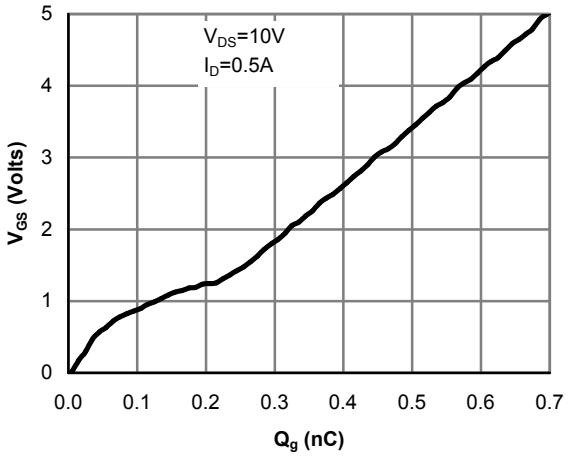


Figure 7: Gate-Charge Characteristics

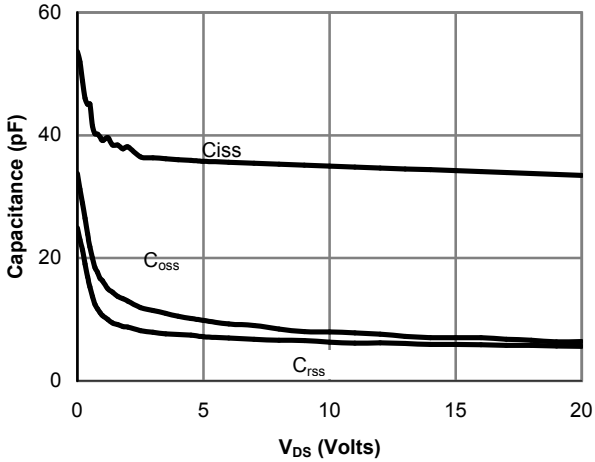


Figure 8: Capacitance Characteristics

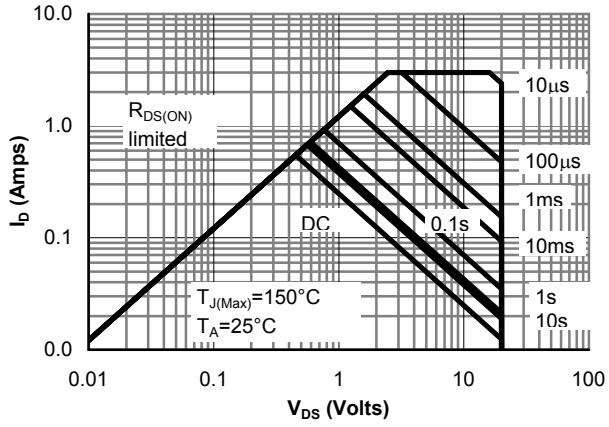


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

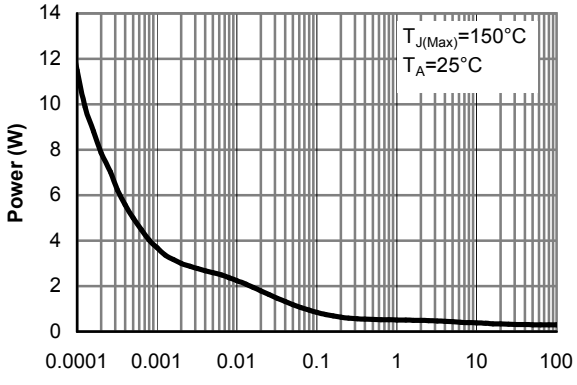


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

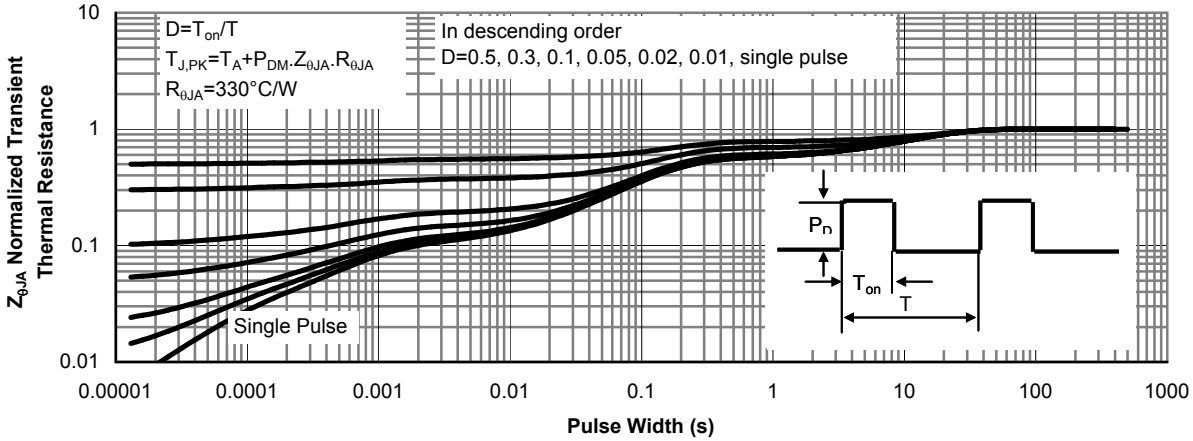


Figure 11: Normalized Maximum Transient Thermal Impedance

P-Channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=-250µA, V_{GS}=0V	-20			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=-20V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±4.5V			±1	µA
		V_{DS}=0V, V_{GS}=±8V			±10	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=-250µA	-1	-0.6	-0.45	
$I_{D(ON)}$	On state drain current	V_{GS}=-4.5V, V_{DS}=-5V	-1			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=-4.5V, I_D=-0.5A		0.65	0.8	Ω
		T_J=125°C		0.9	1.1	
		V_{GS}=-2.5V, I_D=-0.5A		0.85	1	Ω
		V_{GS}=-1.8V, I_D=-0.3A		1.05	1.3	Ω
g_{FS}	Forward Transconductance	V_{DS}=-5V, I_D=-0.51A		0.9		S
V_{SD}	Diode Forward Voltage	I_S=-0.1A,V_{GS}=0V		-0.66	-1	V
I_S	Maximum Body-Diode Continuous Current				-0.5	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=-10V, f=1MHz		72	100	pF
C_{oss}	Output Capacitance			17		pF
C_{rss}	Reverse Transfer Capacitance			9		pF
SWITCHING PARAMETERS						
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=-4.5V, V_{DS}=-10V, R_L=50Ω, R_{GEN}=3Ω		60.5		ns
t_r	Turn-On Rise Time			150		ns
$t_{D(off)}$	Turn-Off DelayTime			612		ns
t_f	Turn-Off Fall Time			436		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=-0.5A, dI/dt=100A/µs		27	35	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=-0.5A, dI/dt=100A/µs		8.3		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in ^{2} FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.
B: Repetitive rating, pulse width limited by junction temperature.
C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.
D. The static characteristics in Figures 1 to 6,12,14 are obtained using <300 µs pulses, duty cycle 0.5% max.
E. These tests are performed with the device mounted on 1 in ^{2} FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.
F. The maximum current rating is limited by bond-wires
Rev5: Oct 2008

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

P-Channel TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

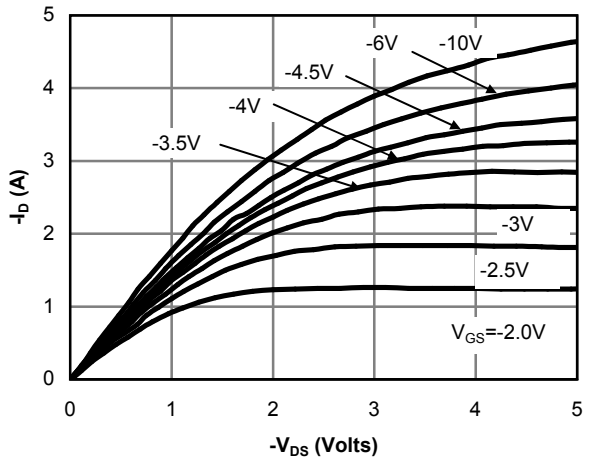


Figure 1: On-Region Characteristics

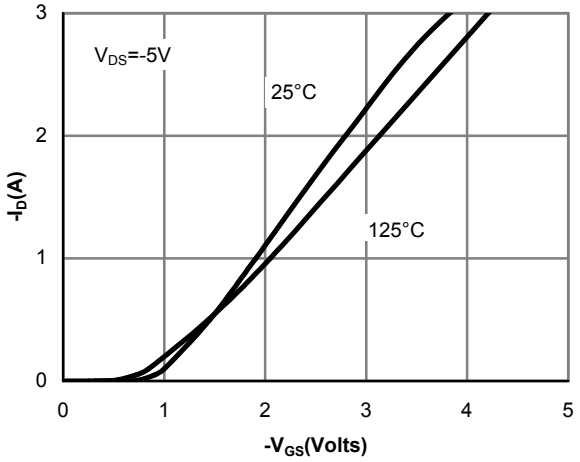


Figure 2: Transfer Characteristics

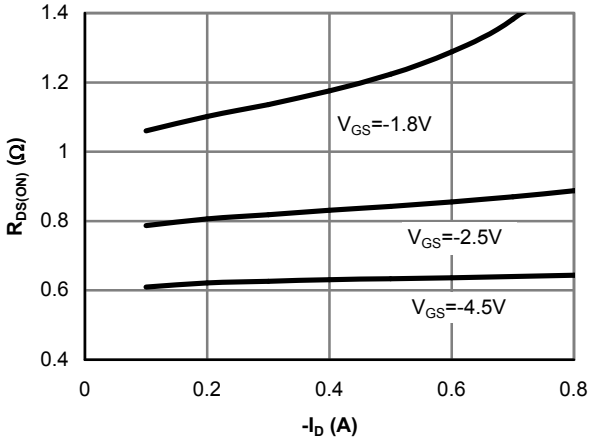


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

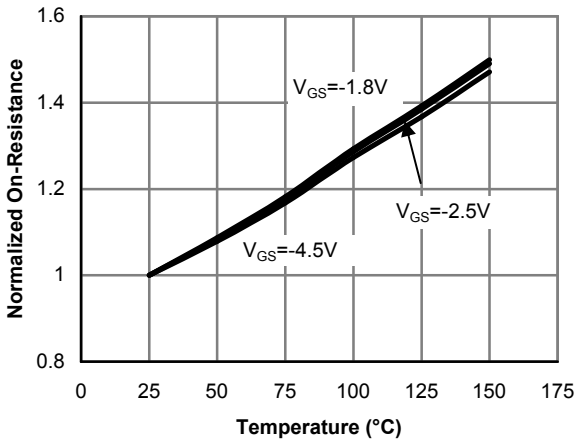


Figure 4: On-Resistance vs. Junction Temperature

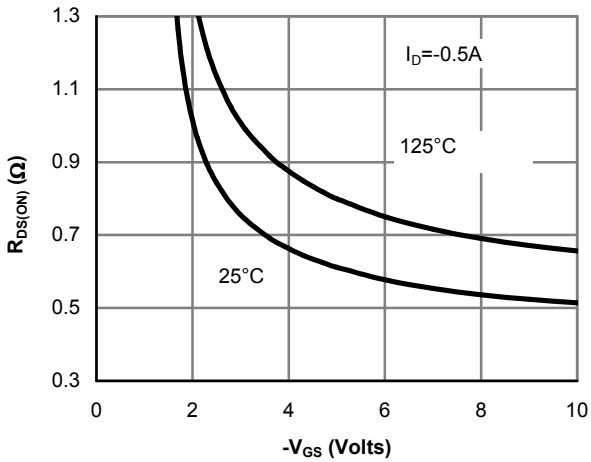


Figure 5: On-Resistance vs. Gate-Source Voltage

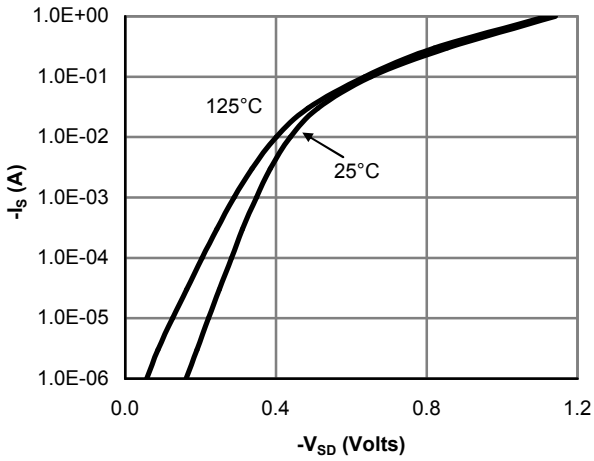


Figure 6: Body-Diode Characteristics

P-Channel TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

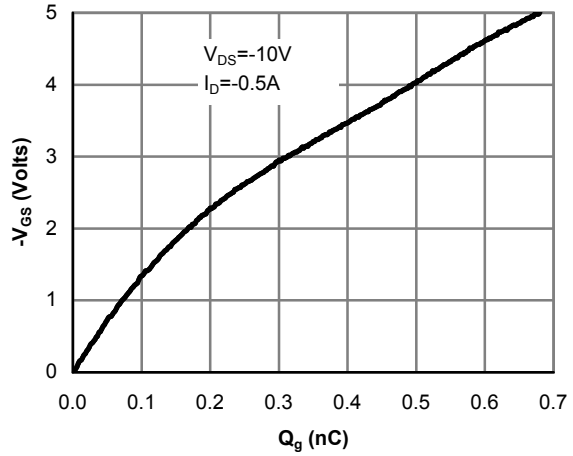


Figure 7: Gate-Charge Characteristics

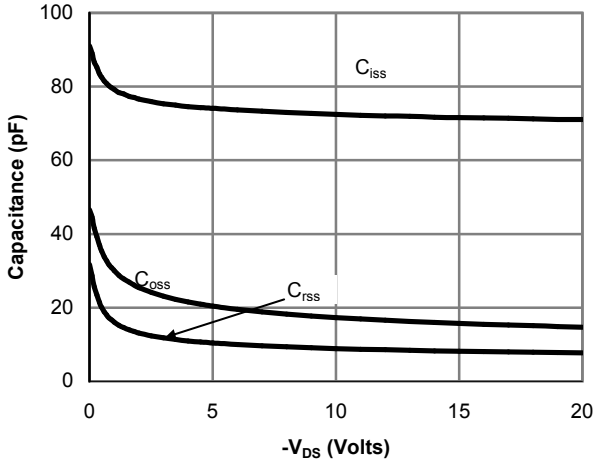


Figure 8: Capacitance Characteristics

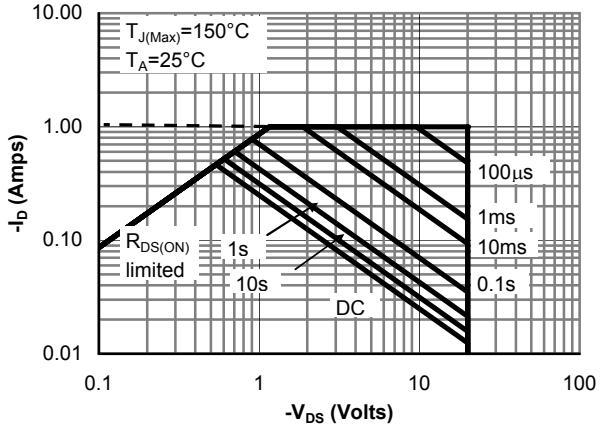


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

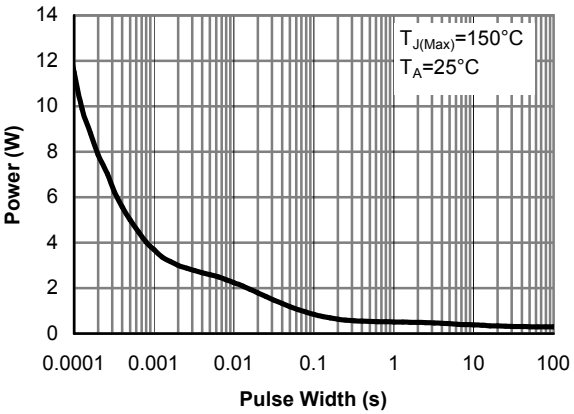


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)



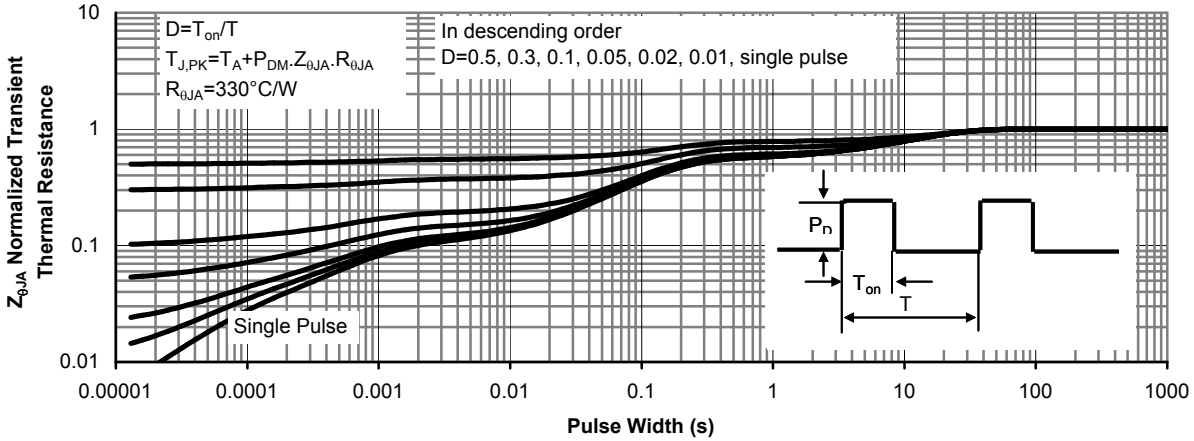



Figure 11: Normalized Maximum Transient Thermal Impedance


Gate Charge Test Circuit & Waveform

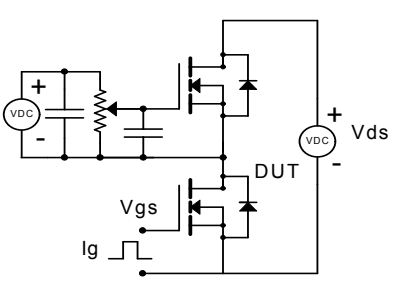

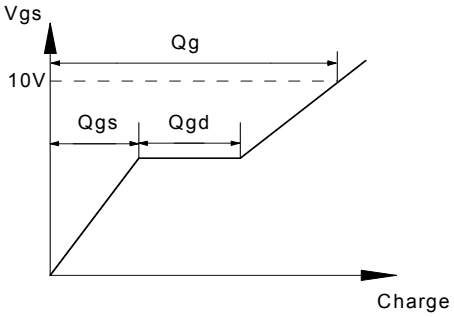



Resistive Switching Test Circuit & Waveforms

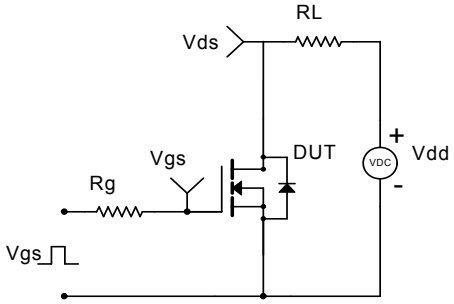

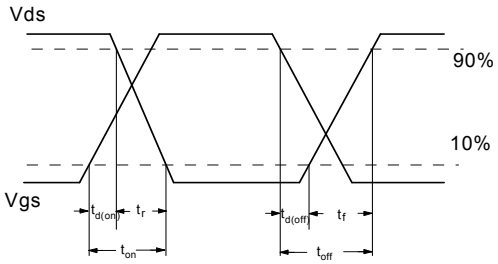



Diode Recovery Test Circuit & Waveforms

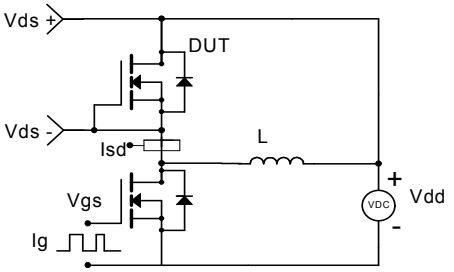

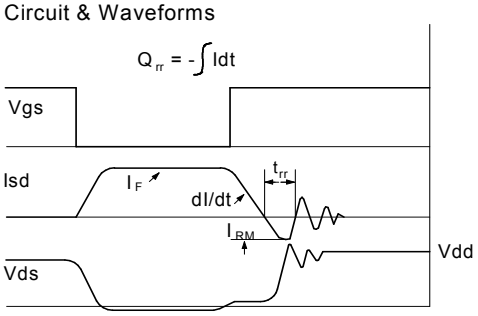



Gate Charge Test Circuit & Waveform

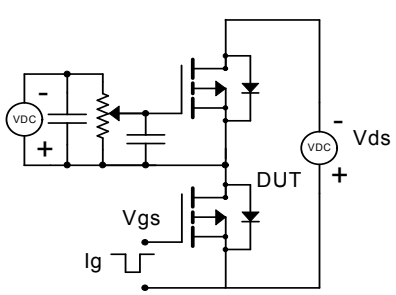

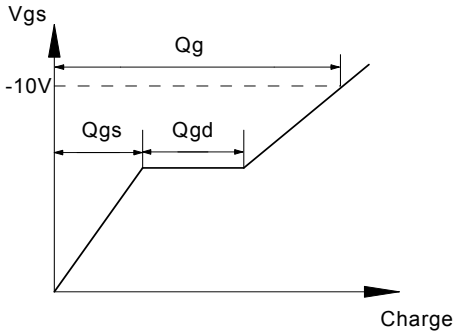

Resistive Switching Test Circuit & Waveforms

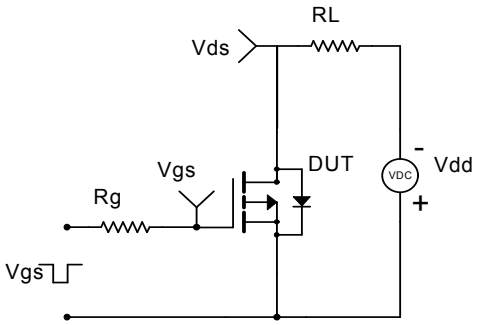

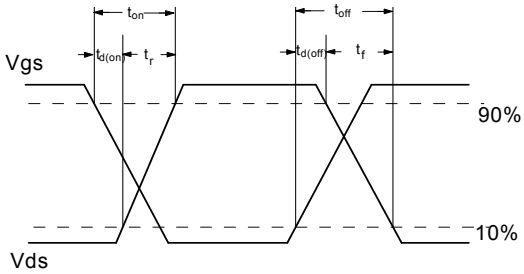

Diode Recovery Test Circuit & Waveforms

