环保物料

TEL:0769-82001899

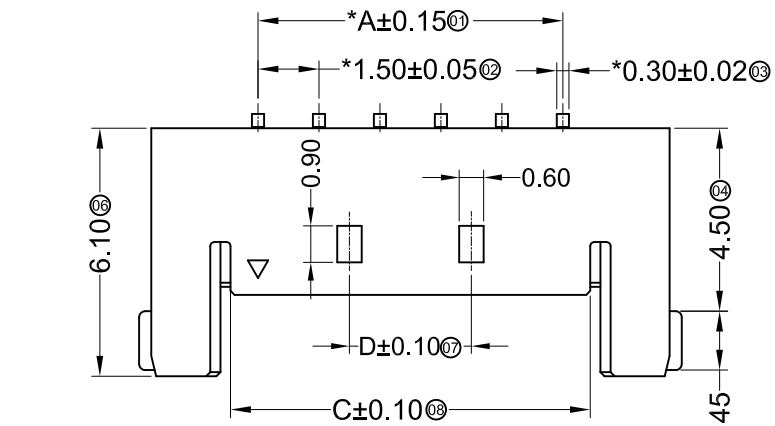



02P~04P Single Hole
Scale 1:0.7



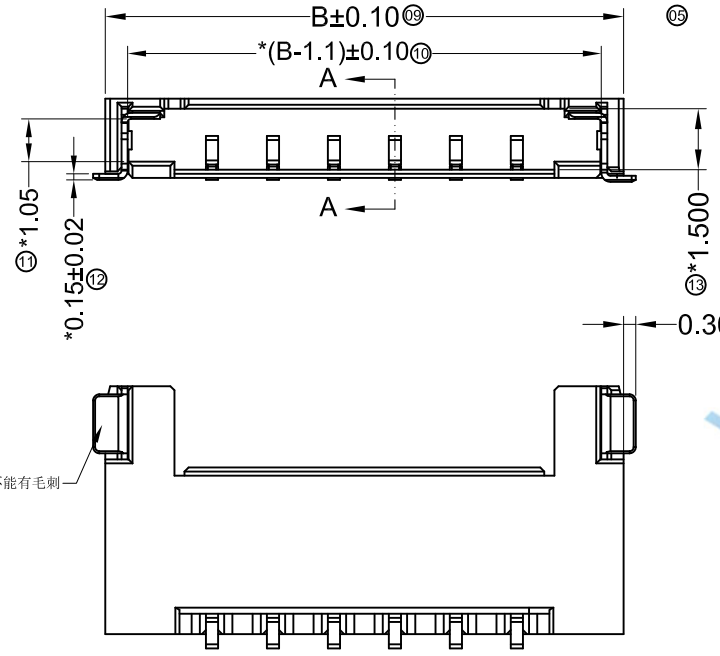

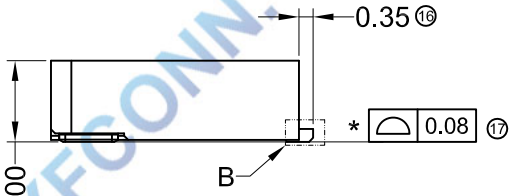



DETAIL B
SCALE 1:1

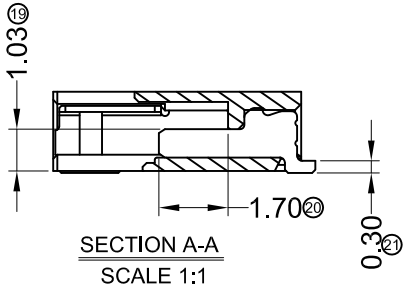

SECTION A-A
SCALE 1:1

SPECIFICATIONS

1.Voltage rating: 150V AC, DC
2.Current rating: 3A, AC, DC
3.Withstanding Voltage: 500V AC/minute
4.Insulation resistance:1000MΩ min
5.Temperature range: -25°C-+85°C
6.Contact resistance: 20mΩ max
WAFER
Housing Material: PA4T UL 94V0
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with :P1503 series Housing
Poles:02-12P
Part No.: M1503RS-xx-BK

Pin位数

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	4.50
08	10.50	15.75	11.85	6.00
09	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

WWW.XFCONN.COM

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X° .	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	1.50mm Crimp Style Connectors
PART. NO.	M1503RS-xx-BK

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009