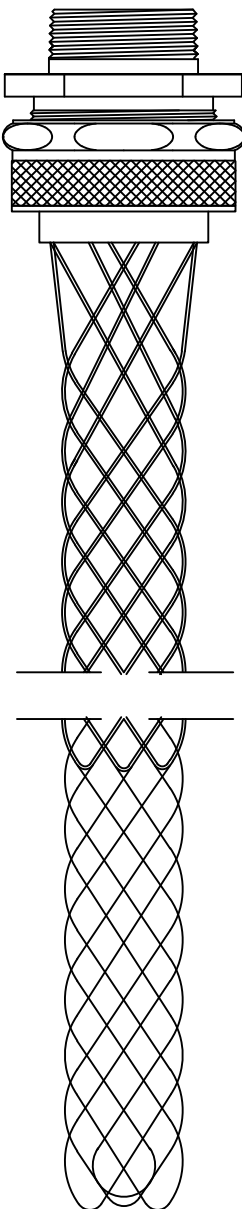
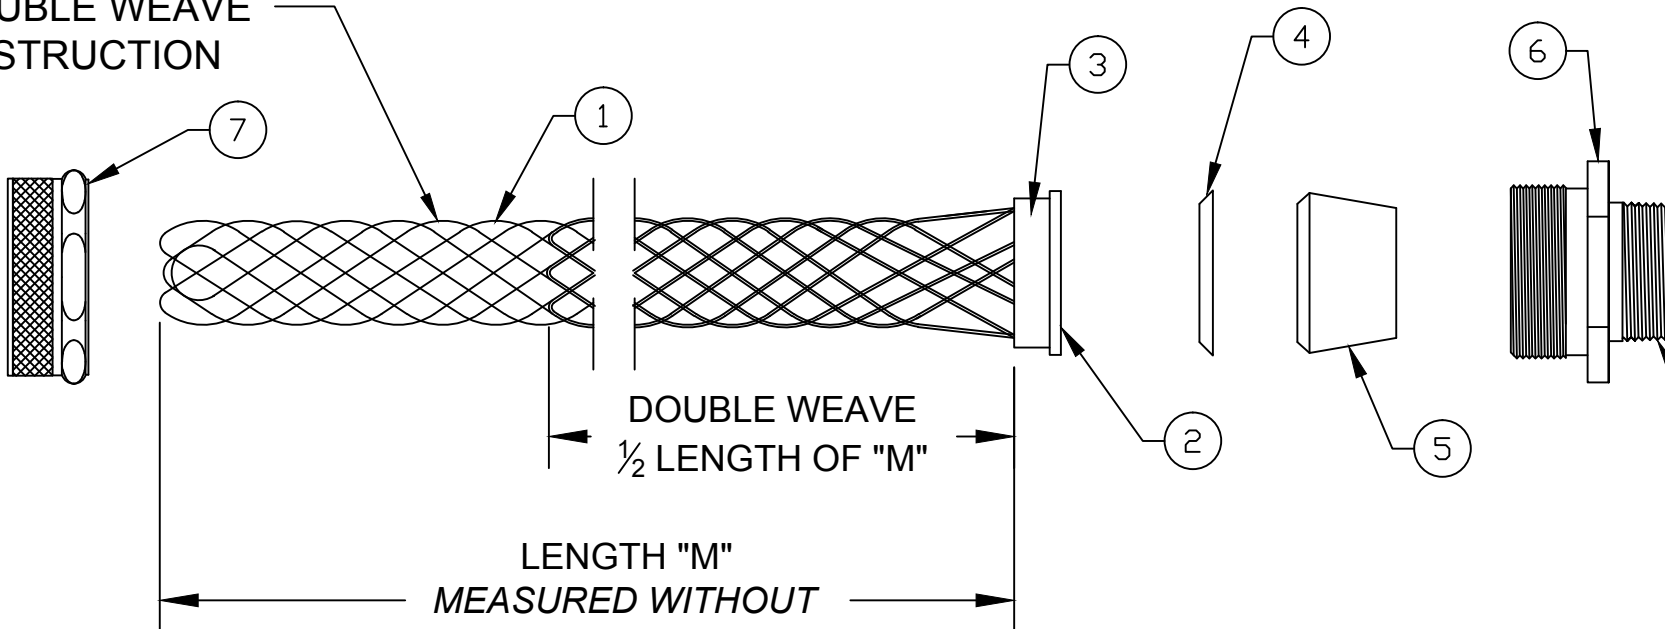


	13	12	11	10	9	8	7	6	5	4	3	2	1																																																																																																																																																																																																												
J	<table><thead><tr><th>CATALOG NUMBER</th><th>MATERIAL NUMBER</th><th>CABLE RANGE</th><th>LENGTH "M"</th><th>N.P.T. FITTING SIZE</th><th>FORM SIZE</th><th>UL LISTED</th><th>CSA APPROVED</th><th>PRODUCT SELECTION NUMBER</th></tr></thead><tbody><tr><td>36277</td><td>1300970181</td><td>.750-.875 / 19.05-22.23</td><td>9.500±1.000 / 241.30±25.40</td><td rowspan="5">1 1/4</td><td rowspan="5">5</td><td>---</td><td></td><td>PG1014</td></tr><tr><td>36271</td><td>1300970175</td><td>.875-1.000 / 22.23-25.40</td><td>8.625±1.000 / 219.08±25.40</td><td></td><td></td><td>PG1016</td></tr><tr><td>36272</td><td>1300970176</td><td>1.000-1.125 / 25.40-28.58</td><td>9.000±1.000 / 228.60±25.40</td><td></td><td></td><td>PG1018</td></tr><tr><td>36273</td><td>1300970177</td><td>1.125-1.250 / 28.58-31.75</td><td>10.000±1.000 / 254.00±25.40</td><td></td><td></td><td>PG1020</td></tr><tr><td>36274</td><td>1300970178</td><td>1.250-1.375 / 31.75-34.925</td><td>12.000±1.000 / 304.80±25.40</td><td></td><td></td><td>PG1022</td></tr><tr><td rowspan="5">I</td><td>36278</td><td>1300970182</td><td>.750-.875 / 19.05-22.23</td><td rowspan="10">1 1/2</td><td rowspan="5">5</td><td>---</td><td></td><td>PG1214</td></tr><tr><td>36475</td><td>1300970235</td><td>.875-1.000 / 22.23-25.40</td><td>8.625±1.000 / 219.08±25.40</td><td></td><td></td><td>PG1216</td></tr><tr><td>36476</td><td>1300970236</td><td>1.000-1.125 / 25.40-28.58</td><td>9.000±1.000 / 228.60±25.40</td><td></td><td></td><td>PG1218</td></tr><tr><td>36477</td><td>1300970237</td><td>1.125-1.250 / 28.58-31.75</td><td>10.000±1.000 / 254.00±25.40</td><td></td><td></td><td>PG1220</td></tr><tr><td>36478</td><td>1300970238</td><td>1.250-1.375 / 31.75-34.925</td><td>12.000±1.000 / 304.80±25.40</td><td></td><td></td><td>PG1222</td></tr><tr><td rowspan="5">H</td><td>36479</td><td>1300970239</td><td>1.312-1.437 / 33.32-36.50</td><td rowspan="5">6</td><td rowspan="5">6</td><td>---</td><td></td><td>PG1223</td></tr><tr><td>36480</td><td>1300970240</td><td>1.437-1.562 / 36.50-39.67</td><td>13.125±1.000 / 333.38±25.40</td><td>---</td><td></td><td>PG1225</td></tr><tr><td>36481</td><td>1300970241</td><td>1.562-1.687 / 39.67-42.85</td><td>15.750±1.500 / 398.78±38.10</td><td>---</td><td></td><td>PG1227</td></tr><tr><td>36482</td><td>1300970242</td><td>1.687-1.812 / 42.85-46.02</td><td>16.250±1.500 / 412.75±38.10</td><td>---</td><td></td><td>PG1229</td></tr><tr><td>36483</td><td>1300970243</td><td>1.750-1.875 / 44.45-47.63</td><td>16.250±1.500 / 412.75±38.10</td><td>---</td><td></td><td>PG1230</td></tr><tr><td rowspan="5">G</td><td>36484</td><td>1300970244</td><td>1.250-1.375 / 31.75-34.925</td><td rowspan="10">2</td><td rowspan="5">6</td><td>---</td><td></td><td>PG1622</td></tr><tr><td>36279</td><td>1300970183</td><td>1.312-1.437 / 33.32-36.50</td><td>12.000±1.000 / 304.80±25.40</td><td>---</td><td></td><td>PG1623</td></tr><tr><td>36485</td><td>1300970245</td><td>1.437-1.562 / 36.50-39.67</td><td>13.125±1.000 / 333.38±25.40</td><td>---</td><td></td><td>PG1625</td></tr><tr><td>36486</td><td>1300970246</td><td>1.562-1.687 / 39.67-42.85</td><td>15.750±1.500 / 398.78±38.10</td><td>---</td><td></td><td>PG1627</td></tr><tr><td>36487</td><td>1300970247</td><td>1.687-1.812 / 42.85-46.02</td><td>16.250±1.500 / 412.75±38.10</td><td>---</td><td></td><td>PG1629</td></tr><tr><td rowspan="5">F</td><td>36488</td><td>1300970248</td><td>1.750-1.875 / 44.45-47.63</td><td rowspan="5">7</td><td rowspan="5">7</td><td>---</td><td></td><td>PG1630</td></tr><tr><td>36489</td><td>1300970249</td><td>1.812-1.937 / 46.02-49.20</td><td>16.250±1.500 / 412.75±38.10</td><td>---</td><td></td><td>PG1631</td></tr><tr><td>36816</td><td>1300970292</td><td>1.937-2.062 / 49.20-52.37</td><td>16.250±1.500 / 412.75±38.10</td><td>---</td><td></td><td>PG1633</td></tr><tr><td>36287</td><td>1300970188</td><td>2.062-2.187 / 52.37-55.55</td><td>17.500±1.500 / 444.50±38.10</td><td>---</td><td></td><td>PG1635</td></tr><tr><td>36288</td><td>1300970189</td><td>2.187-2.312 / 55.55-58.72</td><td>17.500±1.500 / 444.50±38.10</td><td>---</td><td></td><td>PG1637</td></tr><tr><td>E</td><td>36289</td><td>1300970190</td><td>2.312-2.437 / 58.72-61.90</td><td></td><td></td><td>---</td><td></td><td>PG1639</td></tr></tbody></table>													CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	N.P.T. FITTING SIZE	FORM SIZE	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER	36277	1300970181	.750-.875 / 19.05-22.23	9.500±1.000 / 241.30±25.40	1 1/4	5	---		PG1014	36271	1300970175	.875-1.000 / 22.23-25.40	8.625±1.000 / 219.08±25.40			PG1016	36272	1300970176	1.000-1.125 / 25.40-28.58	9.000±1.000 / 228.60±25.40			PG1018	36273	1300970177	1.125-1.250 / 28.58-31.75	10.000±1.000 / 254.00±25.40			PG1020	36274	1300970178	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40			PG1022	I	36278	1300970182	.750-.875 / 19.05-22.23	1 1/2	5	---		PG1214	36475	1300970235	.875-1.000 / 22.23-25.40	8.625±1.000 / 219.08±25.40			PG1216	36476	1300970236	1.000-1.125 / 25.40-28.58	9.000±1.000 / 228.60±25.40			PG1218	36477	1300970237	1.125-1.250 / 28.58-31.75	10.000±1.000 / 254.00±25.40			PG1220	36478	1300970238	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40			PG1222	H	36479	1300970239	1.312-1.437 / 33.32-36.50	6	6	---		PG1223	36480	1300970240	1.437-1.562 / 36.50-39.67	13.125±1.000 / 333.38±25.40	---		PG1225	36481	1300970241	1.562-1.687 / 39.67-42.85	15.750±1.500 / 398.78±38.10	---		PG1227	36482	1300970242	1.687-1.812 / 42.85-46.02	16.250±1.500 / 412.75±38.10	---		PG1229	36483	1300970243	1.750-1.875 / 44.45-47.63	16.250±1.500 / 412.75±38.10	---		PG1230	G	36484	1300970244	1.250-1.375 / 31.75-34.925	2	6	---		PG1622	36279	1300970183	1.312-1.437 / 33.32-36.50	12.000±1.000 / 304.80±25.40	---		PG1623	36485	1300970245	1.437-1.562 / 36.50-39.67	13.125±1.000 / 333.38±25.40	---		PG1625	36486	1300970246	1.562-1.687 / 39.67-42.85	15.750±1.500 / 398.78±38.10	---		PG1627	36487	1300970247	1.687-1.812 / 42.85-46.02	16.250±1.500 / 412.75±38.10	---		PG1629	F	36488	1300970248	1.750-1.875 / 44.45-47.63	7	7	---		PG1630	36489	1300970249	1.812-1.937 / 46.02-49.20	16.250±1.500 / 412.75±38.10	---		PG1631	36816	1300970292	1.937-2.062 / 49.20-52.37	16.250±1.500 / 412.75±38.10	---		PG1633	36287	1300970188	2.062-2.187 / 52.37-55.55	17.500±1.500 / 444.50±38.10	---		PG1635	36288	1300970189	2.187-2.312 / 55.55-58.72	17.500±1.500 / 444.50±38.10	---		PG1637	E	36289	1300970190	2.312-2.437 / 58.72-61.90			---		PG1639	J
CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	N.P.T. FITTING SIZE	FORM SIZE	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER																																																																																																																																																																																																																	
36277	1300970181	.750-.875 / 19.05-22.23	9.500±1.000 / 241.30±25.40	1 1/4	5	---		PG1014																																																																																																																																																																																																																	
36271	1300970175	.875-1.000 / 22.23-25.40	8.625±1.000 / 219.08±25.40					PG1016																																																																																																																																																																																																																	
36272	1300970176	1.000-1.125 / 25.40-28.58	9.000±1.000 / 228.60±25.40					PG1018																																																																																																																																																																																																																	
36273	1300970177	1.125-1.250 / 28.58-31.75	10.000±1.000 / 254.00±25.40					PG1020																																																																																																																																																																																																																	
36274	1300970178	1.250-1.375 / 31.75-34.925	12.000±1.000 / 304.80±25.40					PG1022																																																																																																																																																																																																																	
I	36278	1300970182	.750-.875 / 19.05-22.23	1 1/2	5	---		PG1214																																																																																																																																																																																																																	
	36475	1300970235	.875-1.000 / 22.23-25.40			8.625±1.000 / 219.08±25.40			PG1216																																																																																																																																																																																																																
	36476	1300970236	1.000-1.125 / 25.40-28.58			9.000±1.000 / 228.60±25.40			PG1218																																																																																																																																																																																																																
	36477	1300970237	1.125-1.250 / 28.58-31.75			10.000±1.000 / 254.00±25.40			PG1220																																																																																																																																																																																																																
	36478	1300970238	1.250-1.375 / 31.75-34.925			12.000±1.000 / 304.80±25.40			PG1222																																																																																																																																																																																																																
H	36479	1300970239	1.312-1.437 / 33.32-36.50		6	6	---		PG1223																																																																																																																																																																																																																
	36480	1300970240	1.437-1.562 / 36.50-39.67				13.125±1.000 / 333.38±25.40	---		PG1225																																																																																																																																																																																																															
	36481	1300970241	1.562-1.687 / 39.67-42.85				15.750±1.500 / 398.78±38.10	---		PG1227																																																																																																																																																																																																															
	36482	1300970242	1.687-1.812 / 42.85-46.02				16.250±1.500 / 412.75±38.10	---		PG1229																																																																																																																																																																																																															
	36483	1300970243	1.750-1.875 / 44.45-47.63				16.250±1.500 / 412.75±38.10	---		PG1230																																																																																																																																																																																																															
G	36484	1300970244	1.250-1.375 / 31.75-34.925	2	6	---		PG1622																																																																																																																																																																																																																	
	36279	1300970183	1.312-1.437 / 33.32-36.50			12.000±1.000 / 304.80±25.40	---		PG1623																																																																																																																																																																																																																
	36485	1300970245	1.437-1.562 / 36.50-39.67			13.125±1.000 / 333.38±25.40	---		PG1625																																																																																																																																																																																																																
	36486	1300970246	1.562-1.687 / 39.67-42.85			15.750±1.500 / 398.78±38.10	---		PG1627																																																																																																																																																																																																																
	36487	1300970247	1.687-1.812 / 42.85-46.02			16.250±1.500 / 412.75±38.10	---		PG1629																																																																																																																																																																																																																
F	36488	1300970248	1.750-1.875 / 44.45-47.63		7	7	---		PG1630																																																																																																																																																																																																																
	36489	1300970249	1.812-1.937 / 46.02-49.20				16.250±1.500 / 412.75±38.10	---		PG1631																																																																																																																																																																																																															
	36816	1300970292	1.937-2.062 / 49.20-52.37				16.250±1.500 / 412.75±38.10	---		PG1633																																																																																																																																																																																																															
	36287	1300970188	2.062-2.187 / 52.37-55.55				17.500±1.500 / 444.50±38.10	---		PG1635																																																																																																																																																																																																															
	36288	1300970189	2.187-2.312 / 55.55-58.72				17.500±1.500 / 444.50±38.10	---		PG1637																																																																																																																																																																																																															
E	36289	1300970190	2.312-2.437 / 58.72-61.90			---		PG1639																																																																																																																																																																																																																	
I	GRIP ASSEMBLED  INSTRUCTIONS INCLUDED WITH GRIP													I																																																																																																																																																																																																											
														H																																																																																																																																																																																																											
														G																																																																																																																																																																																																											
H														F																																																																																																																																																																																																											
														E																																																																																																																																																																																																											
														D																																																																																																																																																																																																											
G	SINGLE/DOUBLE WEAVE MESH CONSTRUCTION  DOUBLE WEAVE ½ LENGTH OF "M" LENGTH "M" MEASURED WITHOUT SIZING ROD N.P.T. SIZE SEE TABLE													G																																																																																																																																																																																																											
														C																																																																																																																																																																																																											
														B																																																																																																																																																																																																											
F	<table><thead><tr><th>ITEM</th><th>DESCRIPTION</th><th>MATERIAL</th></tr></thead><tbody><tr><td>1</td><td>WIRE MESH</td><td>STAINLESS STEEL</td></tr><tr><td>2</td><td>INNER RING</td><td>ALUMINUM</td></tr><tr><td>3</td><td>OUTER RING</td><td>ALUMINUM</td></tr><tr><td>4</td><td>FRICTION RING</td><td>ZINC PLATED STEEL</td></tr><tr><td>5</td><td>GROMMET</td><td>RUBBER</td></tr><tr><td>6</td><td>THREADED BODY</td><td>ALUMINUM</td></tr><tr><td>7</td><td>COMPRESSION NUT</td><td>ALUMINUM</td></tr></tbody></table>													ITEM	DESCRIPTION	MATERIAL	1	WIRE MESH	STAINLESS STEEL	2	INNER RING	ALUMINUM	3	OUTER RING	ALUMINUM	4	FRICTION RING	ZINC PLATED STEEL	5	GROMMET	RUBBER	6	THREADED BODY	ALUMINUM	7	COMPRESSION NUT	ALUMINUM	F																																																																																																																																																																																			
	ITEM	DESCRIPTION	MATERIAL																																																																																																																																																																																																																						
	1	WIRE MESH	STAINLESS STEEL																																																																																																																																																																																																																						
2	INNER RING	ALUMINUM																																																																																																																																																																																																																							
3	OUTER RING	ALUMINUM																																																																																																																																																																																																																							
4	FRICTION RING	ZINC PLATED STEEL																																																																																																																																																																																																																							
5	GROMMET	RUBBER																																																																																																																																																																																																																							
6	THREADED BODY	ALUMINUM																																																																																																																																																																																																																							
7	COMPRESSION NUT	ALUMINUM																																																																																																																																																																																																																							
E	RELEASE SALES DWG EC NO: IPG2014-2037 DRWN: HRUIZ01 CH'KD: HKNEELAN APPR: JFMURPHY REV													E																																																																																																																																																																																																											
	QUALITY SYMBOL ▽=0 ▽C=0													D																																																																																																																																																																																																											
	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><thead><tr><th></th><th>mm</th><th>INCH</th></tr></thead><tbody><tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.13</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.25</td><td>±.020</td></tr></tbody></table> ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS														mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±.13	±.010	1 PLACE	±.25	±.020	C																																																																																																																																																																																												
	mm	INCH																																																																																																																																																																																																																							
4 PLACES	±---	±---																																																																																																																																																																																																																							
3 PLACES	±---	±.005																																																																																																																																																																																																																							
2 PLACES	±.13	±.010																																																																																																																																																																																																																							
1 PLACE	±.25	±.020																																																																																																																																																																																																																							
D	DIMENSION STYLE INCH/MM <table><thead><tr><th>DRAWN BY</th><th>DATE</th></tr></thead><tbody><tr><td>HRUIZ01</td><td>2014/10/20</td></tr><tr><th>CHECKED BY</th><th>DATE</th></tr><tr><td>HKNEELAN</td><td>2014/10/20</td></tr><tr><th>APPROVED BY</th><th>DATE</th></tr><tr><td>JFMURPHY</td><td>2016/05/04</td></tr></tbody></table> MATERIAL NO. SEE TABLE SIZE C													DRAWN BY	DATE	HRUIZ01	2014/10/20	CHECKED BY	DATE	HKNEELAN	2014/10/20	APPROVED BY	DATE	JFMURPHY	2016/05/04	B																																																																																																																																																																																															
	DRAWN BY	DATE																																																																																																																																																																																																																							
	HRUIZ01	2014/10/20																																																																																																																																																																																																																							
CHECKED BY	DATE																																																																																																																																																																																																																								
HKNEELAN	2014/10/20																																																																																																																																																																																																																								
APPROVED BY	DATE																																																																																																																																																																																																																								
JFMURPHY	2016/05/04																																																																																																																																																																																																																								
C	SCALE NTS DESIGN UNITS INCH THIRD ANGLE PROJECTION TITLE STRAIN RELIEF DELUXE STRAIGHT MALE 1-1/4" TO 2" N.P.T. MOLEX INCORPORATED DOCUMENT NO. SD-130097-104 SHEET NO. 1 OF 1													A																																																																																																																																																																																																											
	13	12	11	10	9	8	7	6	5	4	3	2	1																																																																																																																																																																																																												