



GLASS PASSIVATED BRIDGE RECTIFIERS


REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 4.0 Amperes

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94V-0
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Polarity : As marked on Body
- Weight : 0.134 ounces, 3.8 grams
- Mounting position : Any

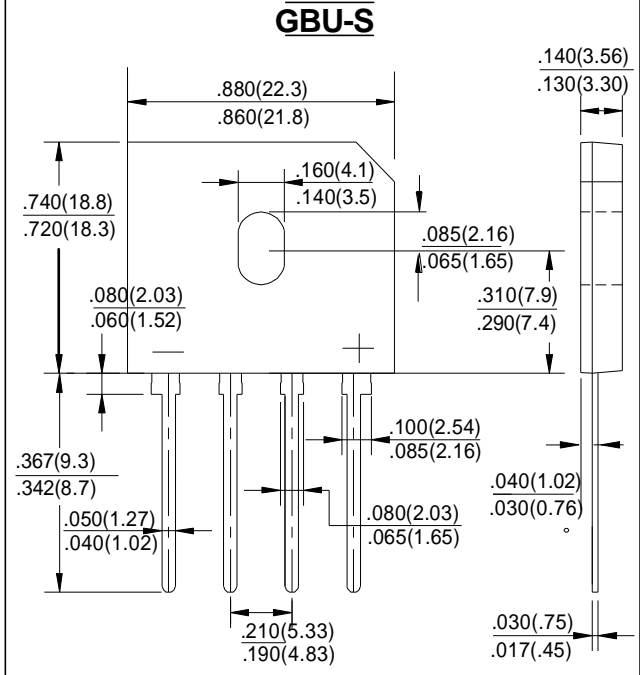

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	GBU 401	GBU 402	GBU 403	GBU 404	GBU 405	GBU 406	GBU 407	UNIT
Maximum recurrent peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @Tc=100 @TA=40	IF	4.0							A
I ² t Rating for fusing (t< 8.3mS)	I ² t	93							A ² sec
Peak forward surge current, single sine-wave superimposed on rated load (JEDEC method)	IFSM	150							A
Maximum instantaneous Forward Voltage Drop per element at 2.0A	VF	1.0							V
Maximum DC Reverse Current @TA=25 at Rated DC Blocking Voltage @TA=100	IR	5.0 500							uA
Typical Thermal Resistance Per leg	R JA R JC	19 4							°W
Operating & Storage Temperature Range	TJ&TSTG	-55 to +150							



RATING AND CHARACTERISTIC CURVES

