4832.1300

4832, solder terminal, screened, 3-pole, Audio Plug/Sockets, 3.5 mm



Description

- Solder terminal :
  for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole , shielded , straight

References


Alternative: Housing insulated 4832.1310; 4832.1320

Technical Data

Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	0.5 A / 30 VDC
Ratings AC	0.5 A / 30 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housings	screened
Style	straight
Lifetime	5000 Insertions

Dimensions

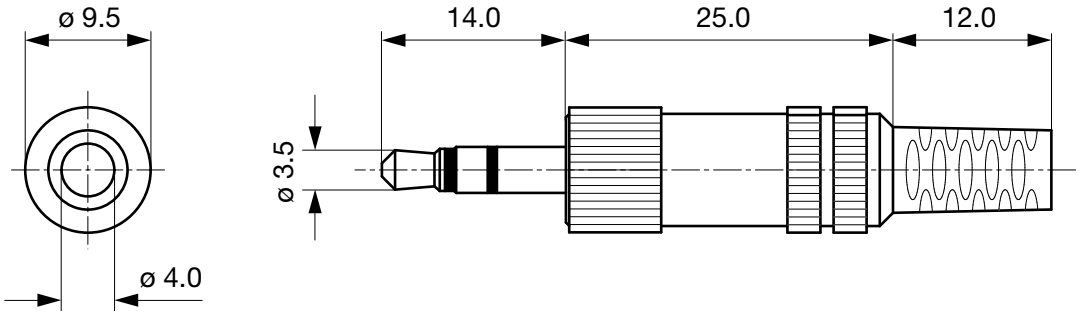

Cable diameter max. 4.0 mm

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number	
Audio Plug/Sockets	3.5	3-pole	solder terminal	4832.1300	▮

▮ Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit

100 Pcs

Mating Outlets/Connectors



Category / Description

Audio Plug/Sockets Overview complete

4832, solder terminal, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2300
4832, PCB terminals, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2320
4832, PCB terminals, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2330
4832, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.3300

Audio Plug/Sockets further types to 4832.1300

28.10.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.