



## Features

- Accepts POTS lines & coaxial protector
- Manufactured from high-impact resistant, ultraviolet-desensitized, flame retardant plastic
- Optional sealed switching jacks with Insulation Displacement Connectors (IDC)
- Subscriber lockable with Telco override
- Convenient ground attachment
- (UL) Listed per UL 497 (File: E53117)

## 7004C Series - Network Interface Device

Bourns® Model 7004C NID provides a secure and weather resistant enclosure for Telco service for residential or commercial installations. The 7004C supplies station protection and test access points and can be configured for a maximum of two POTS lines and one 1740-xx coax protector. The 7004C features convenient cable knockouts and generous working space for wire management.

### How To Order

**7004C - 0X - X X - XX**

**Model Number Designator** \_\_\_\_\_

**Number of Twisted Pairs** \_\_\_\_\_

0 = None  
1 = One  
2 = Two

**Station Protector Options** \_\_\_\_\_

D<sup>1</sup> = 455HS-MSP (2377-45-HS) Voice/Data/DSL (UL, cUL)  
 U<sup>3</sup> = 455HS-MSP (2377-45-HS-IDC) Voice/DSL/Data (UL, cUL)  
 Z<sup>1</sup> = 455HS-BC\* (2377-45-BC) Balance-Sensitive DSL (UL, cUL)  
 W<sup>3</sup> = 455HS-BC\* (2377-45-BC-IDC) Balance-Sensitive DSL (UL, cUL)  
 V<sup>3</sup> = 455-MSP-TBU (2377-45-HS-TBU) MSP w/TBU® Protector (UL, cUL)  
 Q<sup>3</sup> = 455BC-MSP-TBU\* (2377-45-BC-TBU) Balance-Sensitive MSP w/TBU® Protector (UL, cUL)

E<sup>2</sup> = 155HS-MSP (2378-35-HS) Voice/DSL/Data (UL, cUL)  
 Y<sup>2</sup> = 155HS-BC\* (2378-35-BC) Balance-Sensitive DSL (UL, cUL)  
 G = 155G (2378-35-G) Balanced GDT, No Back-Up-Gap (UL, cUL)  
 K = 356G (2377-35-G) Balanced GDT, No Back-Up-Gap (UL, cUL)  
 R<sup>3</sup> = 356G (2377-35-G-IDC) Balanced GDT, No Back-Up-Gap (UL, cUL)  
 T = Tii355M  
 O = No Station Protectors (Not available with DSL configurations)

\*For DSL systems requiring capacitive balance within 1 pF.  
 Note 1 = Digi.Guard - 356 size, RUS Maximum Duty.  
 Note 2 = Digi.Guard II - 125 size, RUS Heavy Duty.  
 Note 3 = Insulation Displacement Connectors (IDC)

**Special Options** \_\_\_\_\_

H = Security Screw in security plate  
 S = Sealed Switching Jack w/IDC (85122-T-IDC)  
 F = Sealed Switching Jack 4-Post (85122-T4)  
 B = Expansion Bridge w/Binding Posts (85122-B)

I = Expansion Bridge w/IDC (85122-IDC)  
 O = No options (standard 85122 jack)  
 N = 90° F-connector (85901)

**Coax Protector Options** \_\_\_\_\_

15 = 1740-15 (150 V±20 % DC Breakdown @ 100 V/Sec)  
 23 = 1740-23 (230 V±20 % DC Breakdown @ 100 V/Sec)  
 35 = 1740-35 (350 V±20 % DC Breakdown @ 100 V/Sec)



### To add lines, use station protector +

85122 Standard Jack  
 85122-T4 Sealed Switching Jack, 4-post  
 85122-T-IDC Sealed Switching Jack w/IDC

# 7004C Series - Network Interface Device

**BOURNS®**

## Installation Diagrams

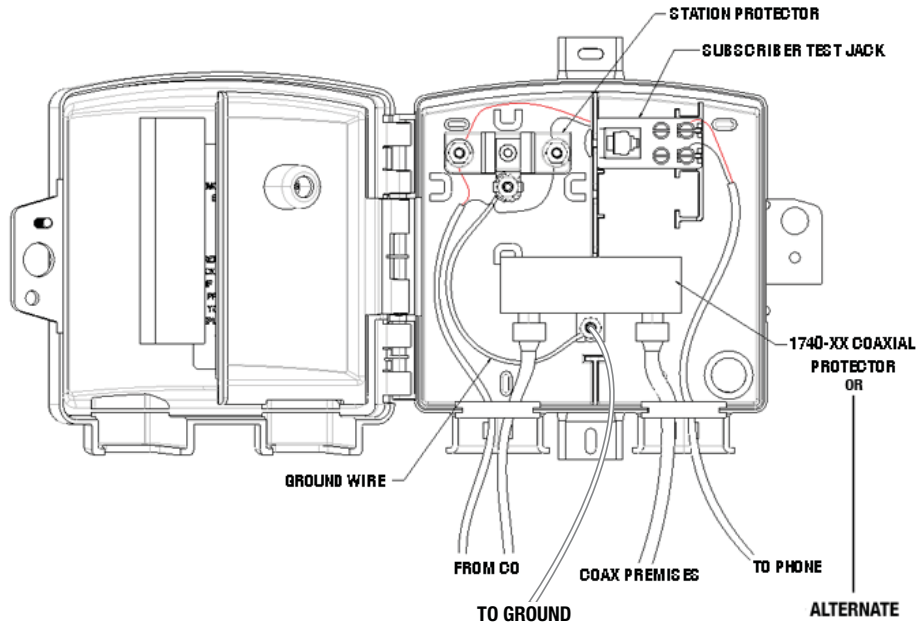


## Product Dimensions

High	Wide	Deep
190.5 (7.5)	195.6 (7.7)	69 (2.7)


DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

## RJ11 Subscriber Bridges


**85122**  
Standard Loop



**85122-T4\***  
Internal Switch - 4 Lugs




**85122-IDC\***  
Sealed Switch Jack w/IDC




## Expansion Bridges

**85122-IDC**  
Insulation Displacement  
Connectors



**85122-B**  
Binding Post



\*Includes environmental sealant and closed-cell foam gasket.

REV. E 11/12

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.