

MMB SERIES
◆FEATURES

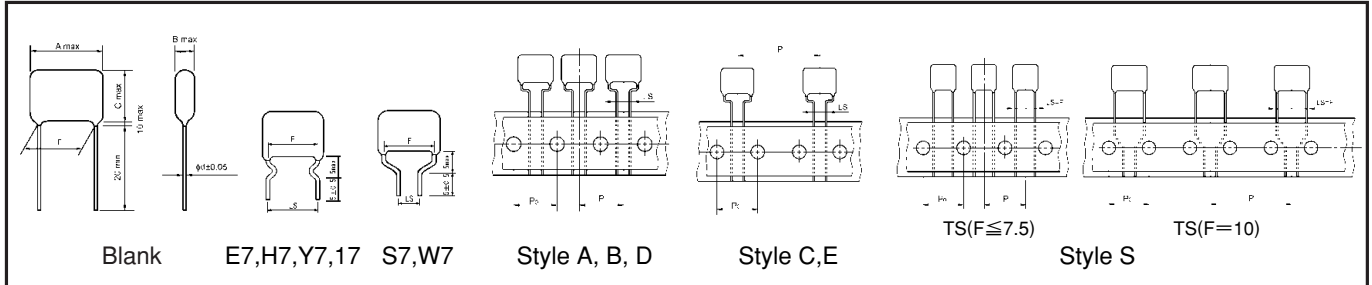
- Small and light.
- Reliability is excellent because these capacitors provide self-healing.
- Coated with flame-retardant (UL94 V-0) epoxy resin.
- RoHS compliance.


◆SPECIFICATIONS

Category temperature	$-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ (Derate the voltage as shown in the Fig2 at P204 when using the capacitor beyond 85°C .)
Rated voltage (U_R)	100VDC, 250VDC, 400VDC, 630VDC
Capacitance tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
$\tan \delta$	0.01max at 1kHz
Voltage proof	$U_R \times 150\%$ 60s
Insulation resistance	$0.33 \mu\text{F} \geq : 9000\text{M}\Omega \text{ min}$ $0.33 \mu\text{F} < : 3000 \Omega \text{ Fmin}$
Reference standard	JIS C 5101-2, JIS C 5101-1

◆OUTLINE

(mm)


◆PART NUMBER


Symbol	U_R
100	100VDC
250	250VDC
400	400VDC
630	630VDC

Symbol	Tolerance
J	$\pm 5\%$
K	$\pm 10\%$

Symbol	Lead style	Symbol	Lead style
Blank	Long lead type	TC	Style A, Ammo pack $P=12.7$ $P_0=12.7$ $LS=5.0$
E7	Lead forming cut $LS=7.5$	TX	Style B, Ammo pack $P=15.0$ $P_0=15.0$ $LS=5.0$
H7	Lead forming cut $LS=10.0$	TL($F=10$) TJ($F \geq 15$)	Style C, Ammo pack $P=25.4$ $P_0=12.7$ $LS=5.0$
Y7	Lead forming cut $LS=15.0$	TH	Style D, Ammo pack $P=15.0$ $P_0=15.0$ $LS=7.5$
17	Lead forming cut $LS=22.5$	TN	Style E, Ammo pack $P=30.0$ $P_0=15.0$ $LS=7.5$
S7	Lead forming cut $LS=5.0$	TS($F \leq 7.5$)	Style S, Ammo pack $P=12.7$ $P_0=12.7$
W7	Lead forming cut $LS=7.5$	TS($F=10$)	Style S, Ammo pack $P=25.4$ $P_0=12.7$

◆ DIMENSIONS AND QUANTITY
◆ RATED VOLTAGE : 100VDC

Part No.	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)							
								Long Lead type		Taping Ammo pack type - style					
		A	B	C	F±1.0	LS±0.5	d	Bag	Carton	A TC	B, D TX, TH	C TL, TJ	E TN	S TS	
100MMB224□**	0.22	10.0	4.6	8.8	7.5	5.0/7.5	0.6	200	2,000	1,500	—	—	—	1,500	
100MMB274□**	0.27	10.0	4.8	10.2	7.5	5.0/7.5	0.6	200	2,000	1,500	—	—	—	1,500	
100MMB334□**	0.33	10.0	4.8	11.7	7.5	5.0/7.5	0.6	200	2,000	1,500	—	—	—	1,500	
100MMB394□**	0.39	10.0	5.2	12.1	7.5	5.0/7.5	0.6	200	2,000	1,000	—	—	—	1,000	
100MMB474□**	0.47	10.0	5.6	12.6	7.5	5.0/7.5	0.6	200	2,000	1,000	—	—	—	1,000	
100MMB564□**	0.56	12.5	5.6	11.4	10.0	5.0/7.5/10.0	0.6	200	2,000	—	1,000	500	—	500	
100MMB684□**	0.68	12.5	6.4	11.9	10.0	5.0/7.5/10.0	0.6	200	2,000	—	1,000	500	—	500	
100MMB824□**	0.82	12.5	6.0	14.0	10.0	5.0/7.5/10.0	0.6	200	1,000	—	1,000	500	—	500	
100MMB105□**	1.0	12.5	6.6	14.6	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	
100MMB125□**	1.2	18.0	6.5	14.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	400	—	
100MMB155□**	1.5	18.0	7.5	15.0	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	400	—	
100MMB185□**	1.8	18.0	8.0	15.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	400	400	—	
100MMB225□**	2.2	18.0	8.5	16.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	400	400	—	
100MMB275□**	2.7	18.0	9.5	17.5	15.0	5.0/7.5/15.0	0.8	100	1,000	—	—	—	—	—	
100MMB335□**	3.3	18.0	10.0	18.0	15.0	5.0/7.5/15.0	0.8	200	1,000	—	—	—	—	—	
100MMB395□**	3.9	25.5	8.0	16.5	22.5	22.5	0.8	200	1,000	—	—	—	—	—	
100MMB475□**	4.7	25.5	9.0	17.5	22.5	22.5	0.8	200	1,000	—	—	—	—	—	

□ : Tolerance (J:±5%, K:±10%) ** : Suffix

◆ RATED VOLTAGE : 250VDC

Part No.	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)							
								Long Lead type		Taping Ammo pack type - style					
		A	B	C	F±1.0	LS±0.5	d	Bag	Carton	A TC	B, D TX, TH	C TL, TJ	E TN	S TS	
250MMB103□**	0.01	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB123□**	0.012	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB153□**	0.015	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB183□**	0.018	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB223□**	0.022	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB273□**	0.027	10.3	4.5	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB333□**	0.033	10.3	5.0	8.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB393□**	0.039	10.3	4.5	8.5	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB473□**	0.047	10.3	4.5	8.5	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB563□**	0.056	10.3	4.8	8.8	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB683□**	0.068	10.3	5.0	9.0	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB823□**	0.082	10.3	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,500	—	—	—	1,500	
250MMB104□**	0.1	10.3	6.0	10.0	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	
250MMB124□**	0.12	10.3	6.0	10.0	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	
250MMB154□**	0.15	10.3	6.0	11.5	7.5	5.0/7.5	0.6	200	5,000	1,000	—	—	—	1,000	
250MMB184□**	0.18	12.8	5.0	11.0	10.0	5.0/7.5/10.0	0.6	200	5,000	—	1,000	500	—	500	
250MMB224□**	0.22	12.8	5.5	11.5	10.0	5.0/7.5/10.0	0.6	200	5,000	—	1,000	500	—	500	
250MMB274□**	0.27	12.8	6.5	12.0	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	
250MMB334□**	0.33	12.8	6.5	13.0	10.0	5.0/7.5/10.0	0.6	200	3,000	—	1,000	500	—	500	
250MMB394□**	0.39	18.0	5.0	11.0	15.0	5.0/7.5/15.0	0.6	200	3,000	—	—	500	500	—	
250MMB474□**	0.47	18.0	5.5	11.5	15.0	5.0/7.5/15.0	0.6	100	3,000	—	—	500	500	—	
250MMB564□**	0.56	18.0	5.5	13.0	15.0	5.0/7.5/15.0	0.6	100	2,000	—	—	500	500	—	
250MMB684□**	0.68	18.0	6.0	13.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	500	—	
250MMB824□**	0.82	18.0	6.5	14.0	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	400	—	
250MMB105□**	1.0	18.0	7.0	14.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	400	—	
250MMB125□**	1.2	18.0	7.4	16.5	15.0	5.0/7.5/15.0	0.8	200	1,000	—	—	400	400	—	
250MMB155□**	1.5	18.0	8.3	17.0	15.0	5.0/7.5/15.0	0.8	200	1,000	—	—	400	300	—	
250MMB185□**	1.8	25.5	7.0	16.2	22.5	22.5	0.8	200	1,000	—	—	—	—	—	
250MMB225□**	2.2	25.5	7.8	17.0	22.5	22.5	0.8	200	1,000	—	—	—	—	—	
250MMB275□**	2.7	25.5	9.0	18.0	22.5	22.5	0.8	200	800	—	—	—	—	—	
250MMB335□**	3.3	25.5	10.0	19.0	22.5	22.5	0.8	200	800	—	—	—	—	—	
250MMB395□**	3.9	25.5	11.0	20.0	22.5	22.5	0.8	100	500	—	—	—	—	—	
250MMB475□**	4.7	25.5	12.3	21.3	22.5	22.5	0.8	100	500	—	—	—	—	—	
250MMB565□**	5.6	31.0	11.0	22.0	27.5	—	0.8	100	500	—	—	—	—	—	
250MMB685□**	6.8	31.0	12.5	23.3	27.5	—	0.8	100	400	—	—	—	—	—	
250MMB825□**	8.2	31.0	14.0	24.5	27.5	—	0.8	50	400	—	—	—	—	—	
250MMB106□**	10.0	31.0	15.7	26.3	27.5	—	0.8	50	300	—	—	—	—	—	

□ : Tolerance (J:±5%, K:±10%) ** : Suffix

◆ **PERMISSIBLE CURRENT FOR FREQUENCY**

