


SPECIFICATION

Part No.	:	MA130.A.LP.002
Product Name	:	MA130 GPS/GLONASS/GALILEO and ISM Band 868MHz 2 in 1 Combination Hercules Screw Mount (Permanent Thread Mount)
Features	:	Stable and High efficiency 4dBi Gain 868MHz ISM Band -200mm RG316 SMA(M) GPS/GLONASS/GALILEO - Two Stage 27dB+LNA - 200mm RG174 SMA(M) Low profile - Height 28.5mm, Diameter 47.8mm Robust, UV and Vandal resistant PC housing IP67/IP69K Water Resistant RoHS Compliant

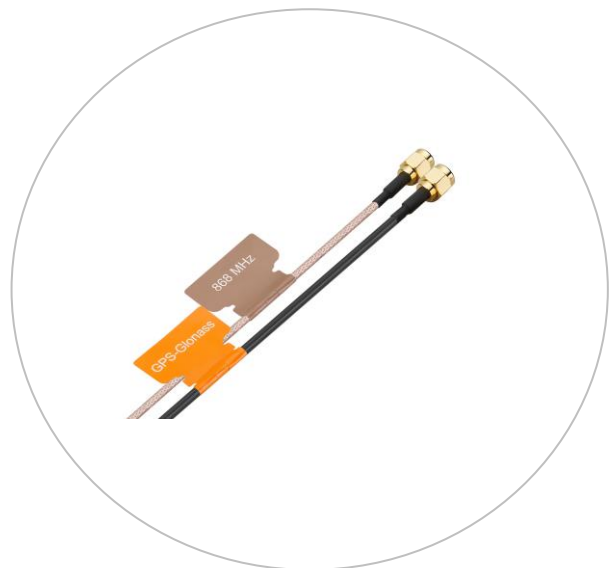

1. Introduction

The MA130 Hercules antenna is a GPS/GLONASS/GALILEO and ISM Band 868MHz combination 2in1 high performance solution for remote monitoring. The integrated metal thread-mount allows for external use on vehicles and outdoor assets worldwide.

The 868MHz ISM Band antenna has an inbuilt ground-plane and comparatively wide-bandwidth of 30MHz+, at a minimum return loss of -10dB from 850MHz to 880MHz, delivering complete stability of performance when mounted on a ground-plane or in free-space, thus permitting a wide variety of installations. The omni-directional gain pattern, with a peak gain of 4dBi when using shorter cable lengths, ensures constant reception and transmission.

The GPS/GLONASS/GALILEO antenna has been optimized to work on both GPS/GALILEO and GLONASS bands, allowing the antenna to see the maximum amount of satellites in the sky and improving tracking accuracy enormously especially in built up areas, such as urban canyons where traditional GPS-only solutions struggle to maintain a lock driving around corners. A front-end SAW filter attenuates any nearby out-of-band wireless transmissions so the GPS/GALILEO LNA is not driven into compression or damaged.

The Hercules is also prized by the leading wireless device brands globally due to its unique mechanical construction. The compact size and rugged polycarbonate construction, which can withstand direct attack and hazards such as tree-branches, coupled with a waterproof rating of IP67 and IP69K (waterproof against high pressure industrial cleaning from top and bottom sides) are un-matched in the industry.

The standard option comes with 200mm cables and SMA(M) connectors. The cable length and connector are customizable. Taoglas supplies low loss extension cables according to your requirement. Maximum cable length should not go beyond 5 meters. The Hercules is also available in White. Contact your regional sales office for further information.

2. Specification


ELECTRICAL ISM Band 868MHz						
Operation Frequency (MHz)		868 MHz				
Cable length (M)		0.2	1	2	3	5
In free space	Average Gain (dB)	-2.69	-3.29	-3.99	-4.79	-6.39
	Efficiency (%)	53.79	46.85	39.87	33.16	22.95
	Peak Gain	3.98	3.38	2.68	1.88	0.28
Cable length (M)		0.2	1	2	3	5
On 30x30cm ground plane	Average Gain (dB)	-2.14	-2.74	-3.44	-4.24	-5.84
	Efficiency (%)	61.04	53.16	45.25	37.64	26.04
	Peak Gain	4.51	3.91	3.21	2.41	0.81
Max VSWR		2:1				
Max. Return Loss (dB)		-10				
Polarization		Linear				
Impedance		50 Ohms				
Max Input Power		5 Watts				
ELECTRICAL GPS-GLONASS-GALILEO						
Frequency		1574~1606MHz				
Impedance		50 ohm				
VSWR		2.0 Max				
GPS/GALILEO Patch Gain @ Zenith		-1.4dBi Passive Gain @ Zenith				
GLONASS Patch Gain @ Zenith		-1.3dBi Passive Gain @ Zenith				
Out Band Rejection		fo = 1575.42MHz				
		fo ± 30 MHz 5dB Min.				
		fo ± 50 MHz 20dB Min.				
		fo ± 100 MHz 25dB Min.				
Input Voltage		Typ. 2.5~5.5V				
Total Gain @ Zenith		27dB typical at 3.0V				
Current Consumption		10mA typical at 3.0V				
Noise Figure		1.3dB typical				

MECHANICAL	
Dimension (mm)	Height = 28.5 mm and Diameter = 47.8 mm
Cable length	200mm RG316 of ISM Band antenna – Fully Customizable 200mm RG174 of GPS/GLONASS/GALILEO antenna –Fully Customizable
Connector	Both are SMA(M)ST – Fully Customizable
Casing	PC
Base and Thread	Nickel plated steel
Thread Diameter	18 mm
Weather proof gasket	CR4305
Sealant	Rubber Stopper
Weight	140g (200mm cable length)
ENVIRONMENTAL RATINGS	
Protection	IP67 & IP69K
Corrosion	5% NaCl for 48hrs - Nickel plated steel base and thread
Temperature Range	-40°C to +85°C
Thermal Shock	100 cycles -40°C to +85°C
Humidity	Non-condensing 65°C 95% RH
Shock (Drop Test)	1m drop on concrete 6 axes
Cable Pull	8 Kgf
Recommended Torque Setting for Mounting	24.5N·m
Maximum Torque Setting for Mounting	29.5N·m

3. Antenna Characteristics

3.1. Test Setup

MA.130.A.LP.002 antenna was tested with R&S ZNB-8 network analyzer.

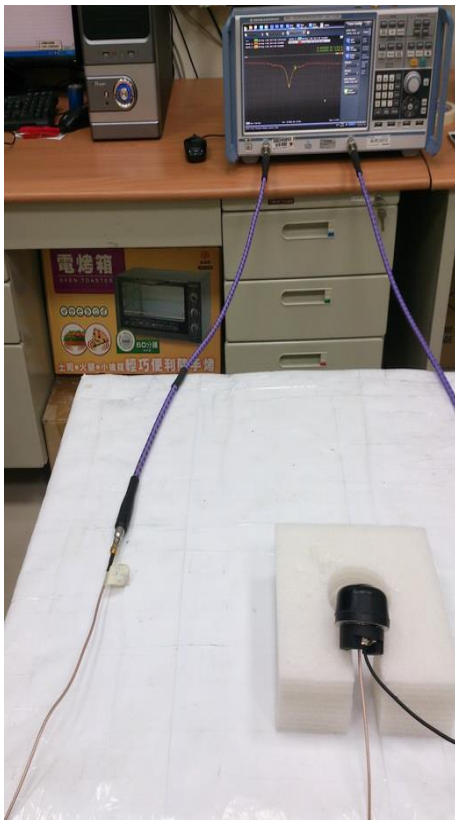

In free space




On 30x30 ground plane

Taoglas measured the antenna with two states - in free space, and mounted on a 30x30cm ground plane


4.868MHz Antenna

4.1. Return Loss

4.1.1. In free space

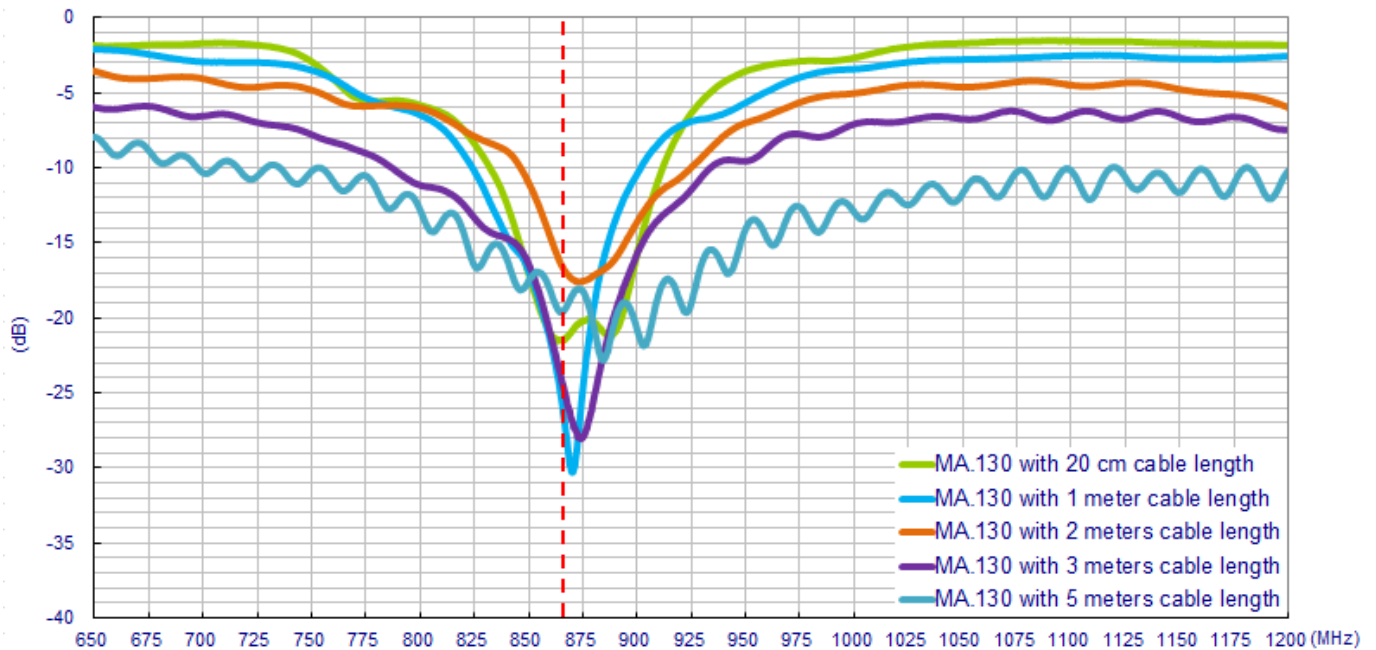


4.1.2. On 30X30cm ground plane

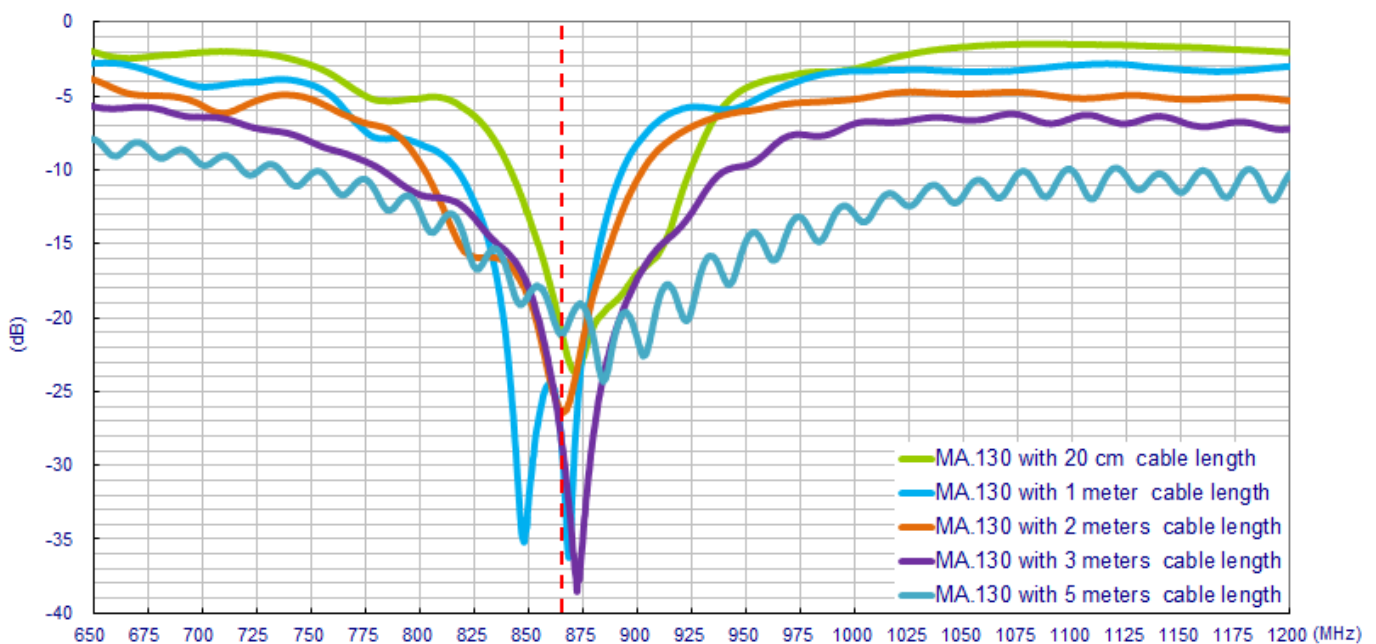


4.2. Average Gain

4.2.1. In free space

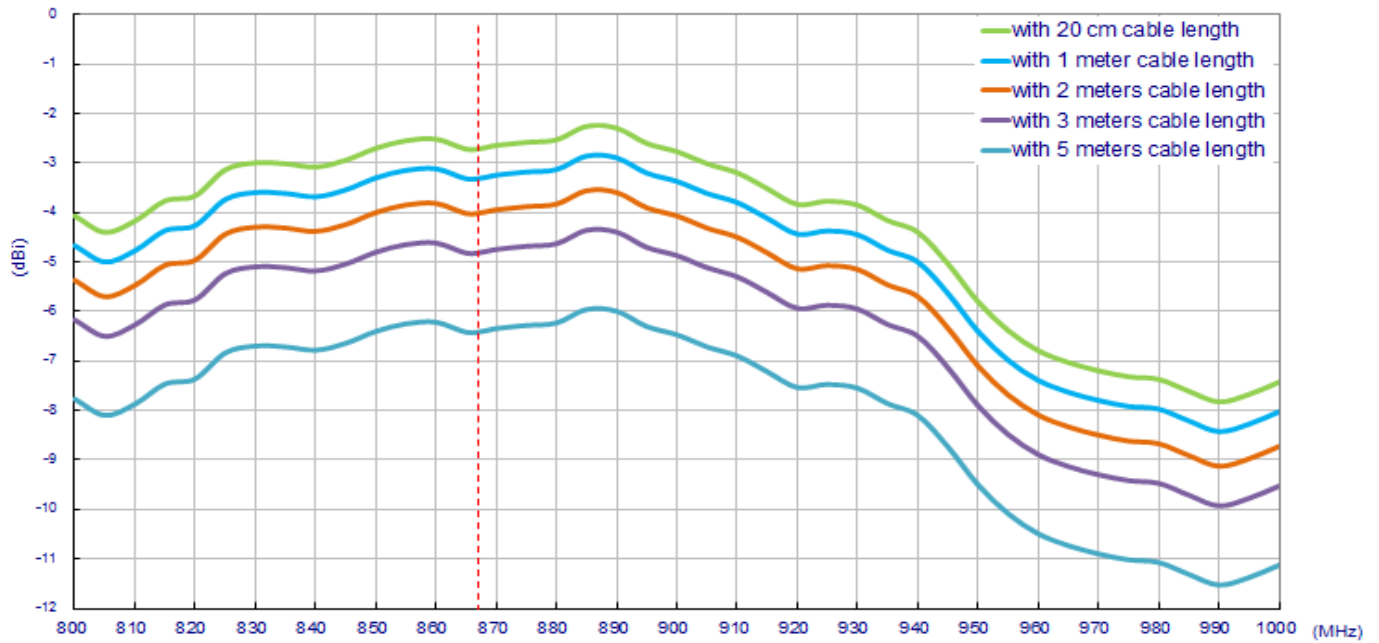


4.2.2. On 30x30cm ground plane

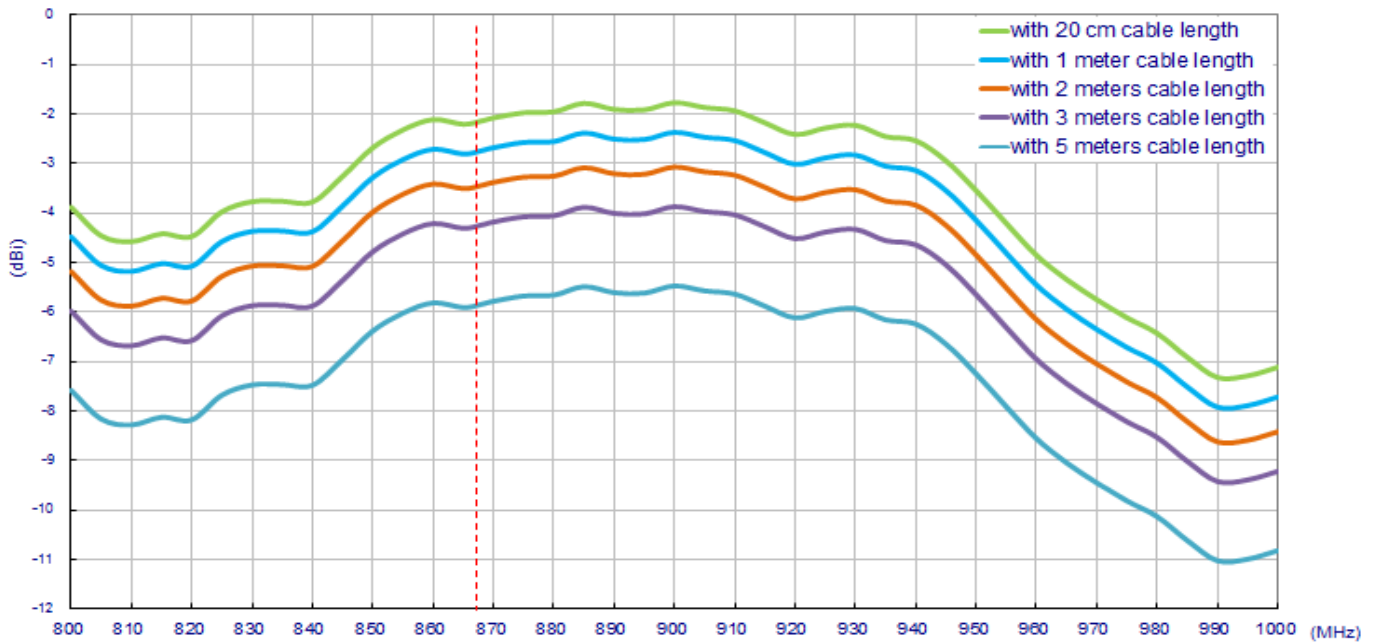


4.3. Efficiency

4.3.1. In free space

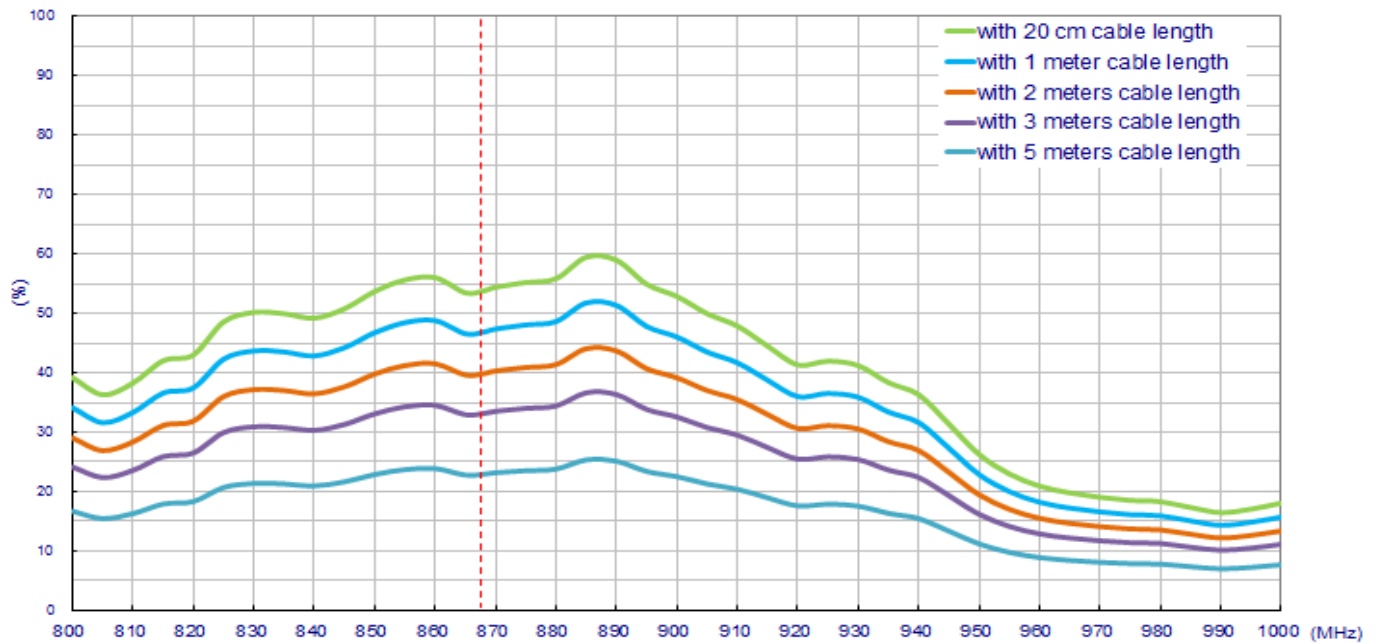


4.3.2. On 30x30cm ground plane

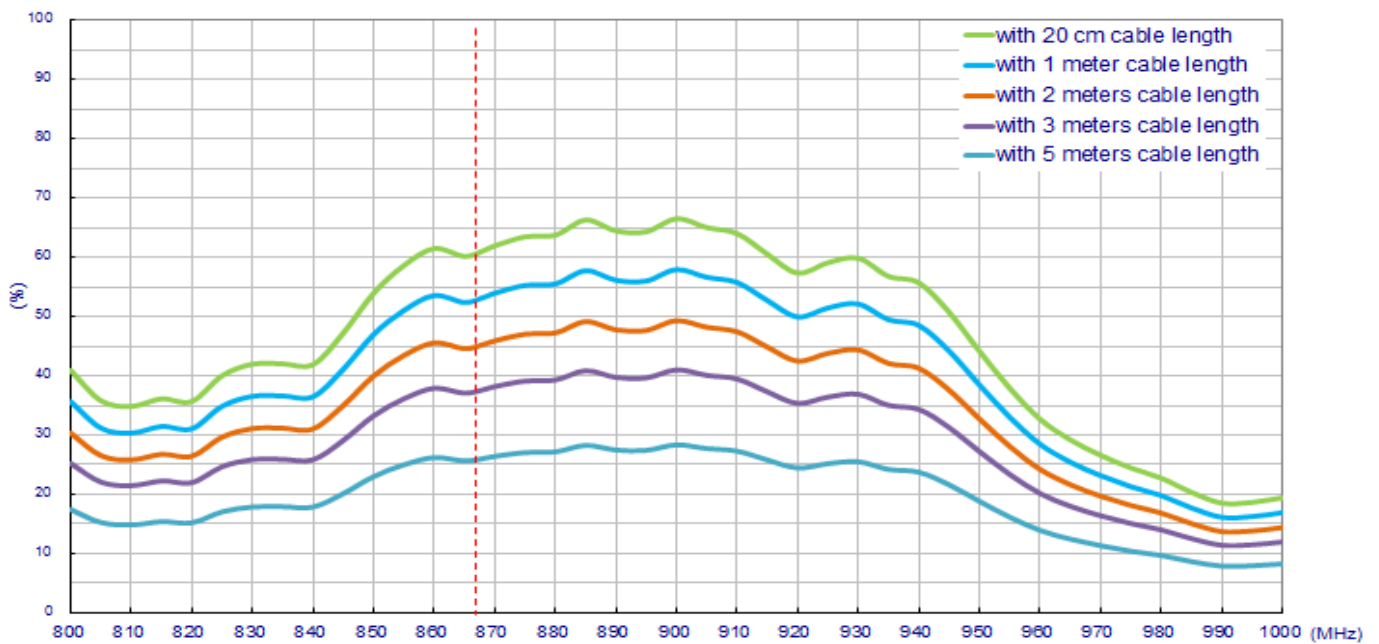


4.4. Peak Gain

4.4.1. In free space

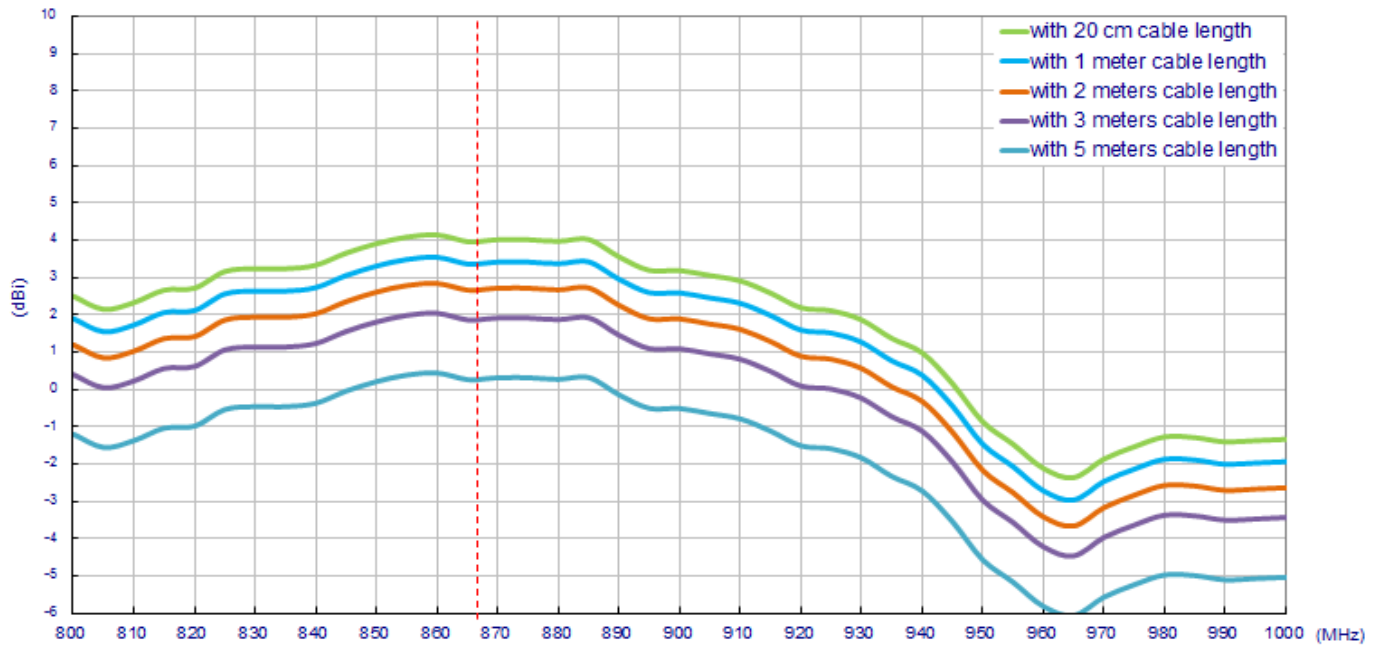

4.4.2. On 30x30cm ground plane

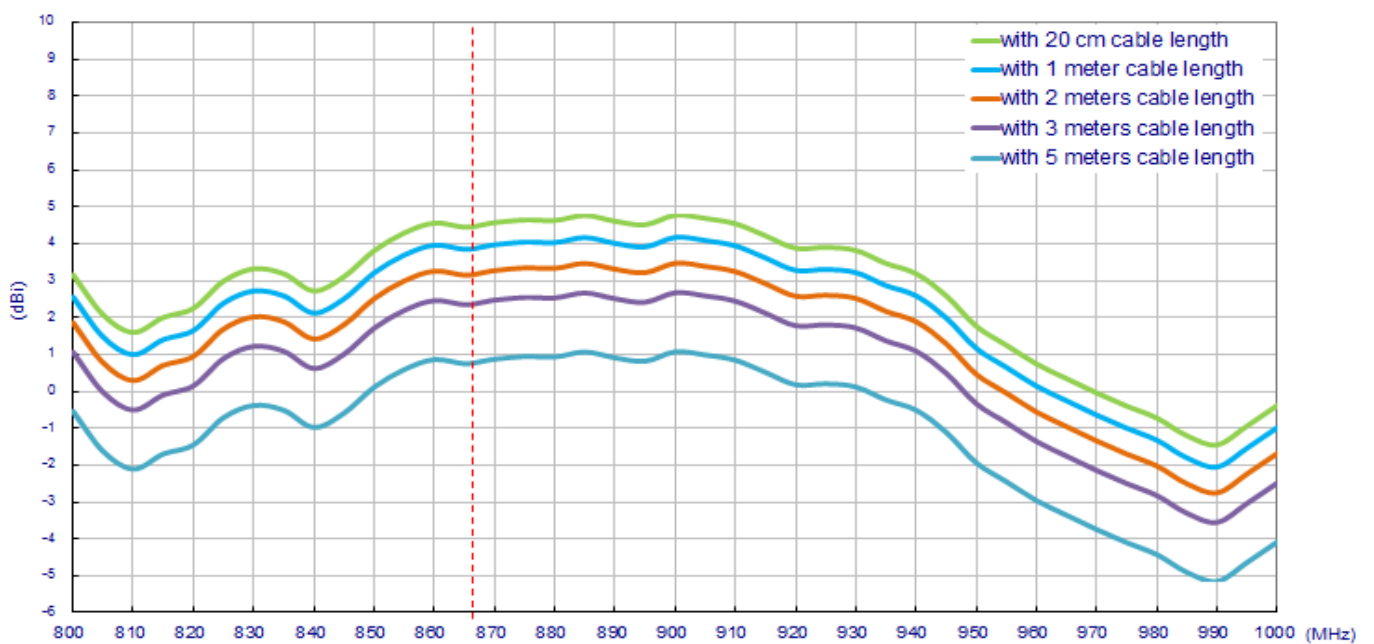


4.5. Antenna Radiation Patterns

4.5.1. Antenna Setup

The antenna radiation pattern test setup is shown below.




In free space

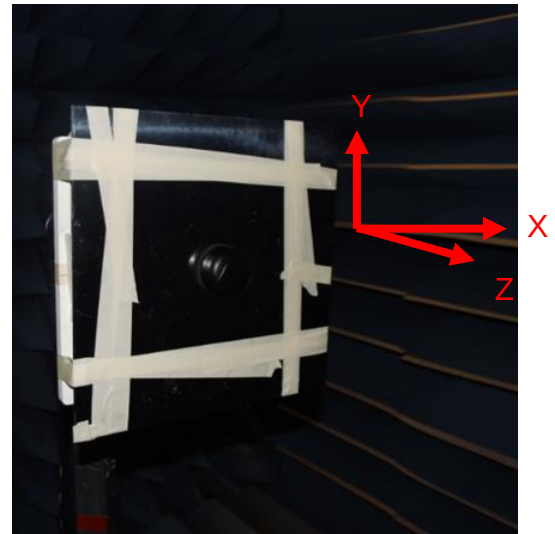


On 30x30 ground plane

4.5.2. Antenna Radiation Patterns


In free space
XY Plane

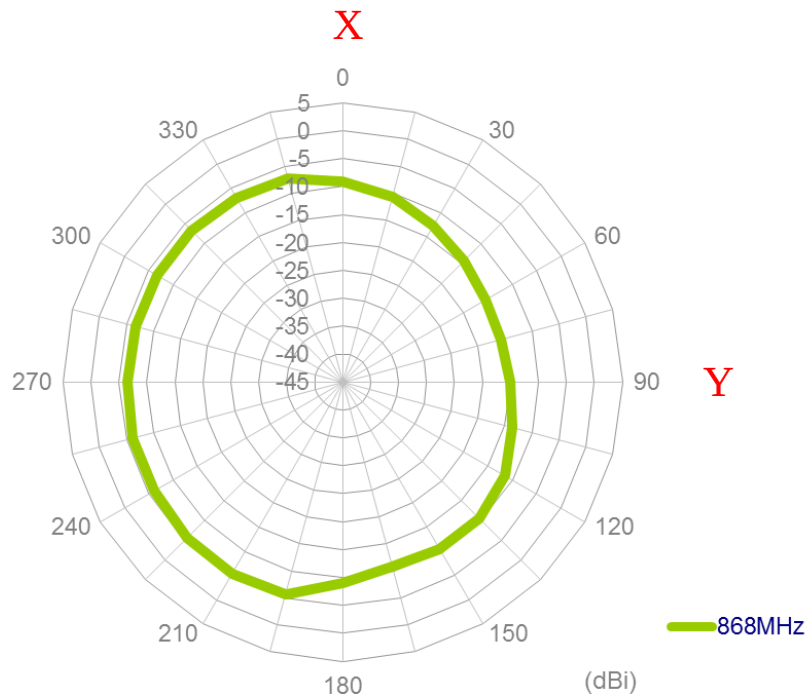


XZ Plane

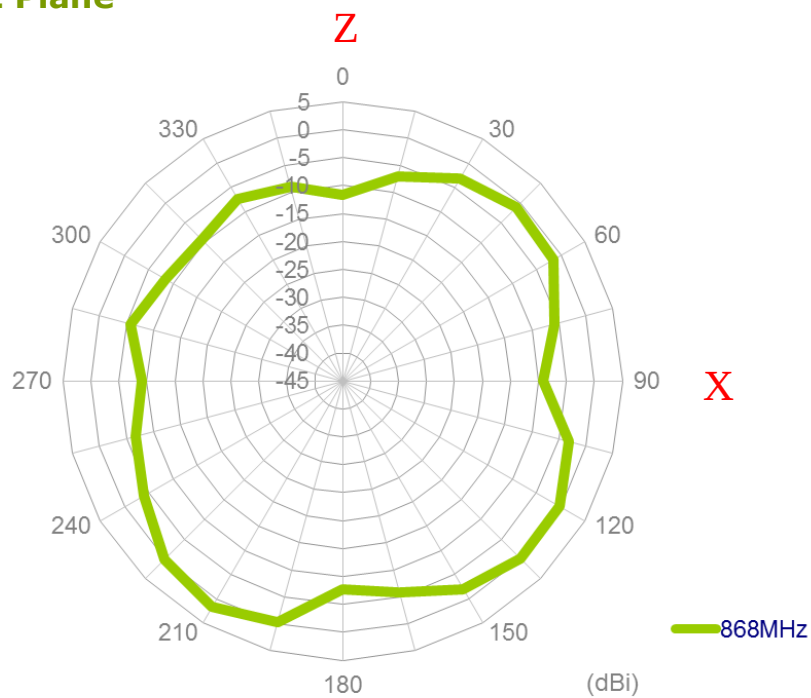


YZ Plane

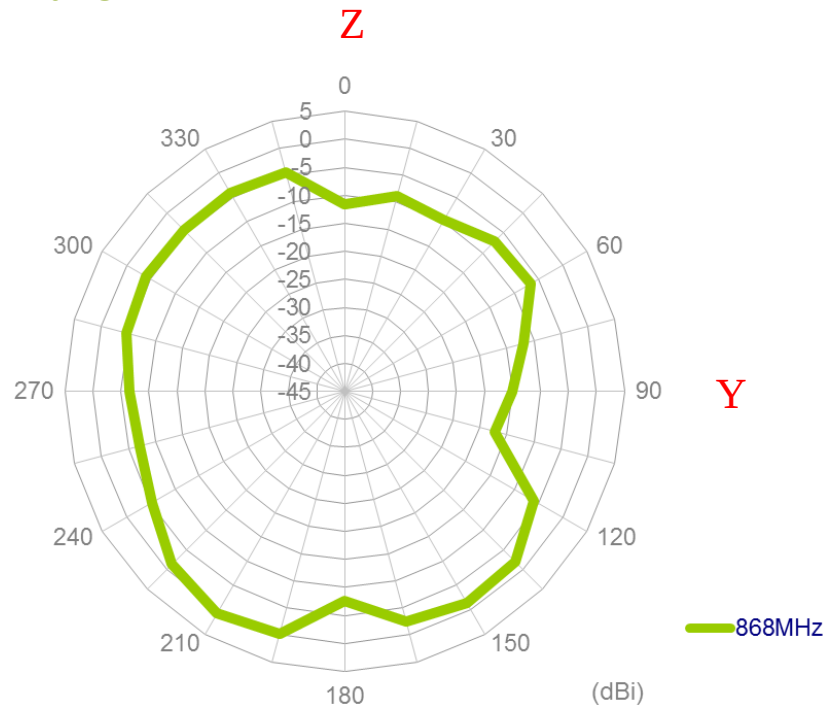


On 30x30cm ground plane XY Plane

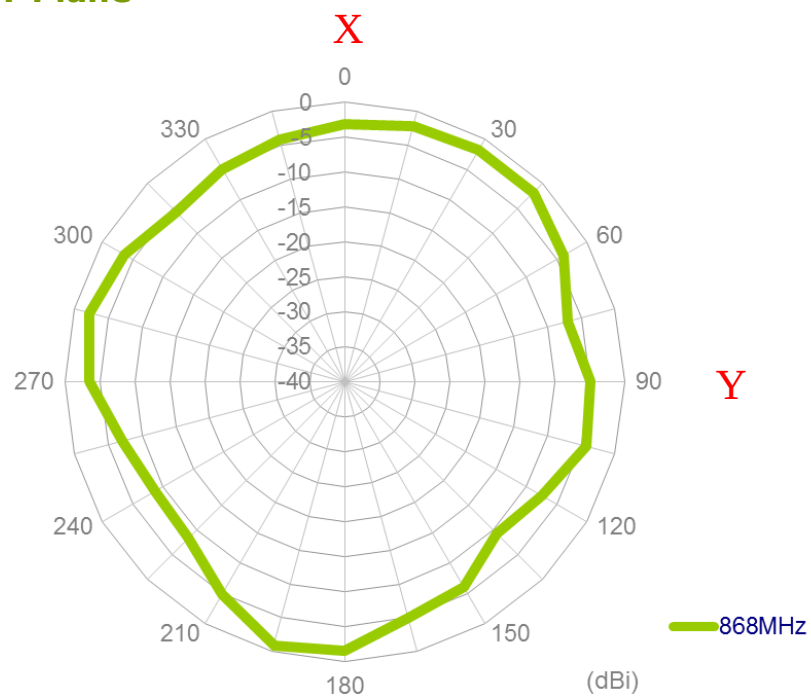

XZ Plane

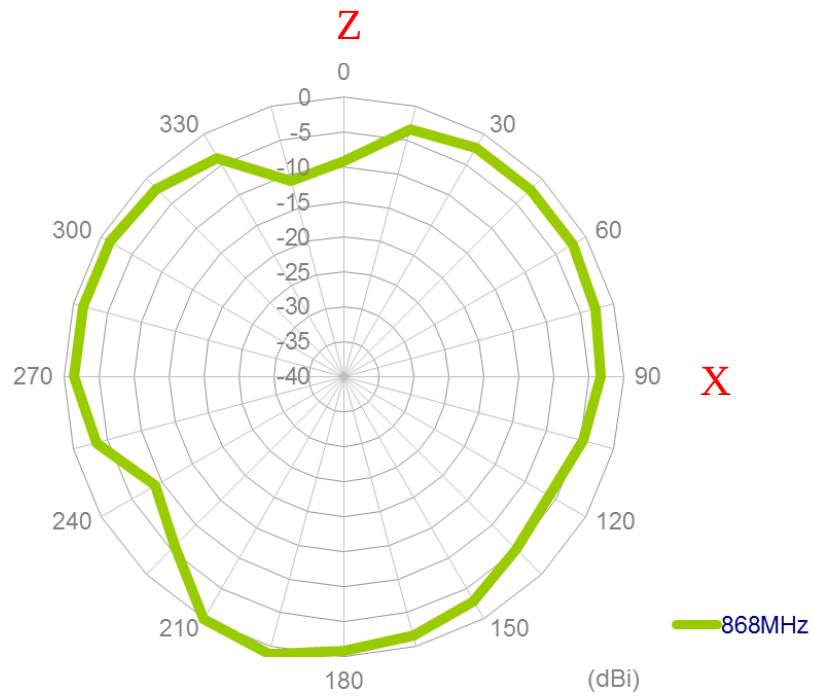


YZ Plane

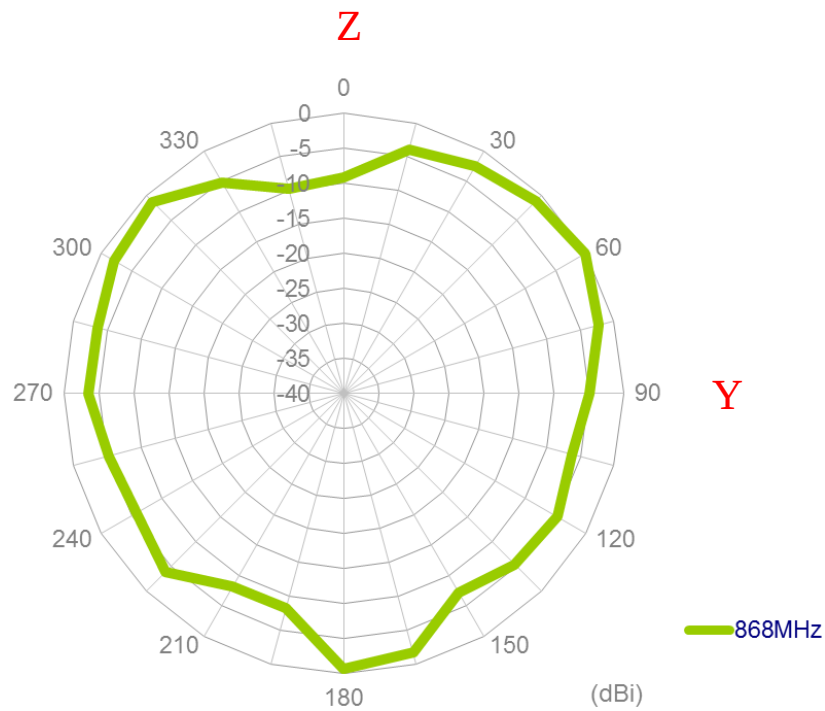


5. GPS-GLONASS-GALILEO Antenna

5.1. System Block Diagram

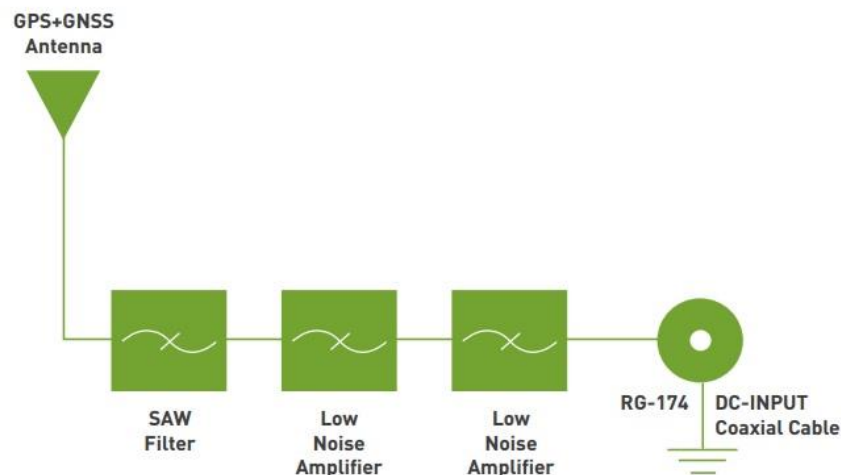


5.2. GPS-GLONASS-GALILEO Passive Antenna Result

5.2.1. Return Loss

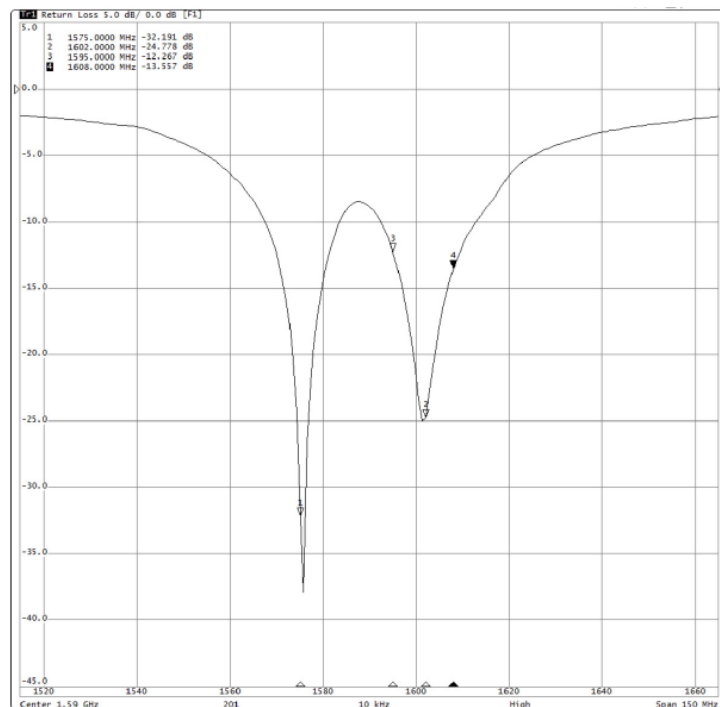

Return Loss : 1575.42 MHz -32.19 dB
1602.6 MHz -24.77 dB


5.2.2. VSWR

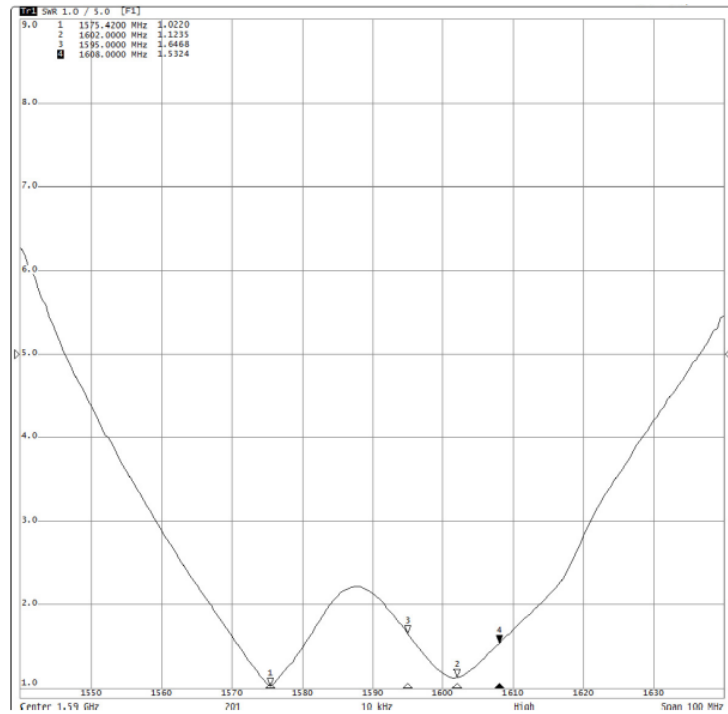

VSWR: 1.022 @ 1575.42 MHz

1.12 @ 1602.6 MHz

5.2.3. Smith Chart

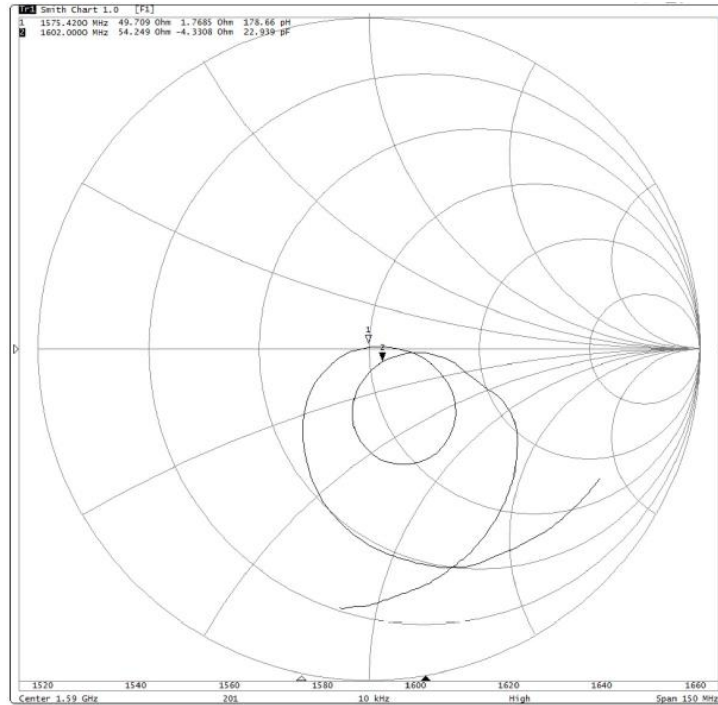


Impedance : 49.70 +j1.76 Ohm


Impedance : 54.24 -j4.33 Ohm

5.3. GPS-GLONASS-GALILEO Radiation Patterns


XZ-Plane

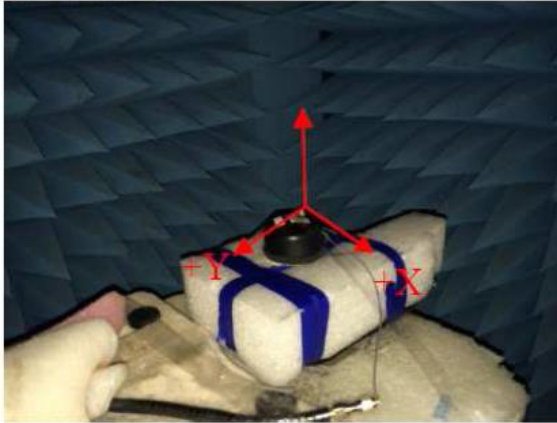


YZ-Plane

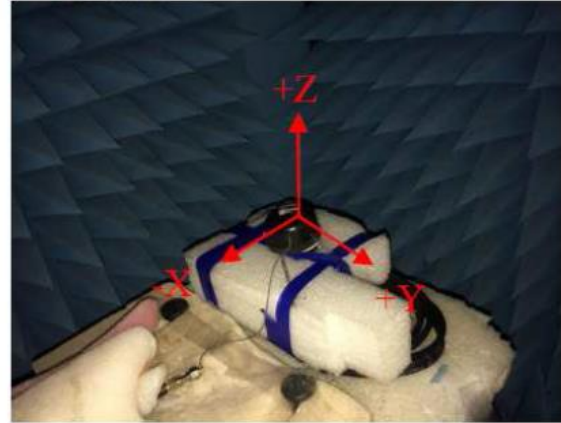


5.3.1. 1575.42 MHz XZ-Plane

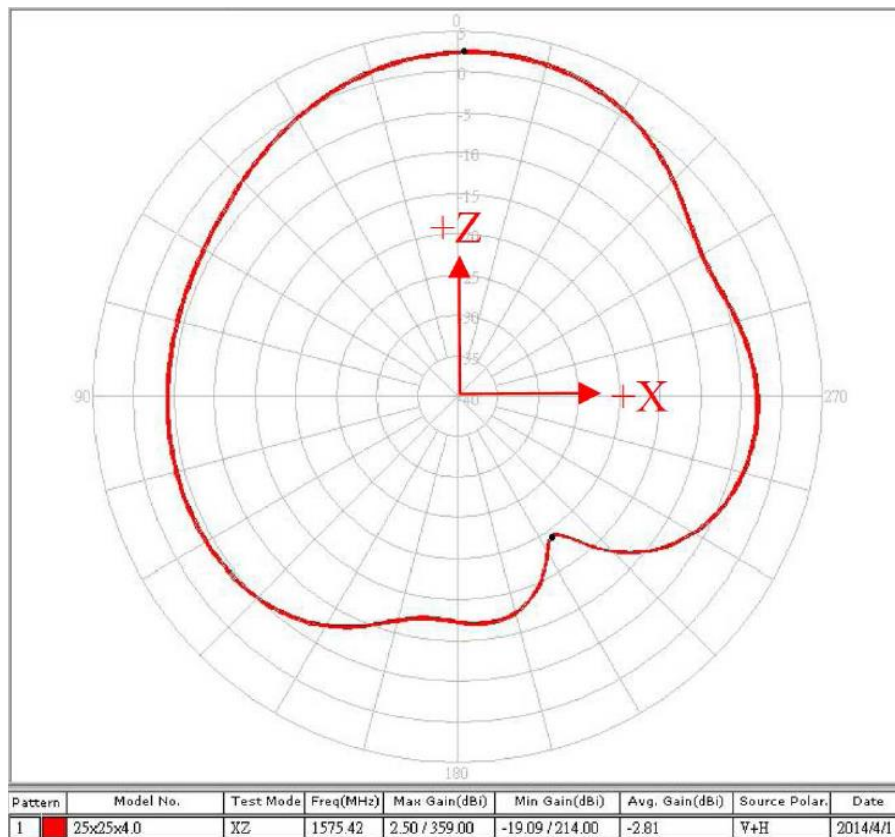


5.3.2. 1575.42 MHz YZ-Plane

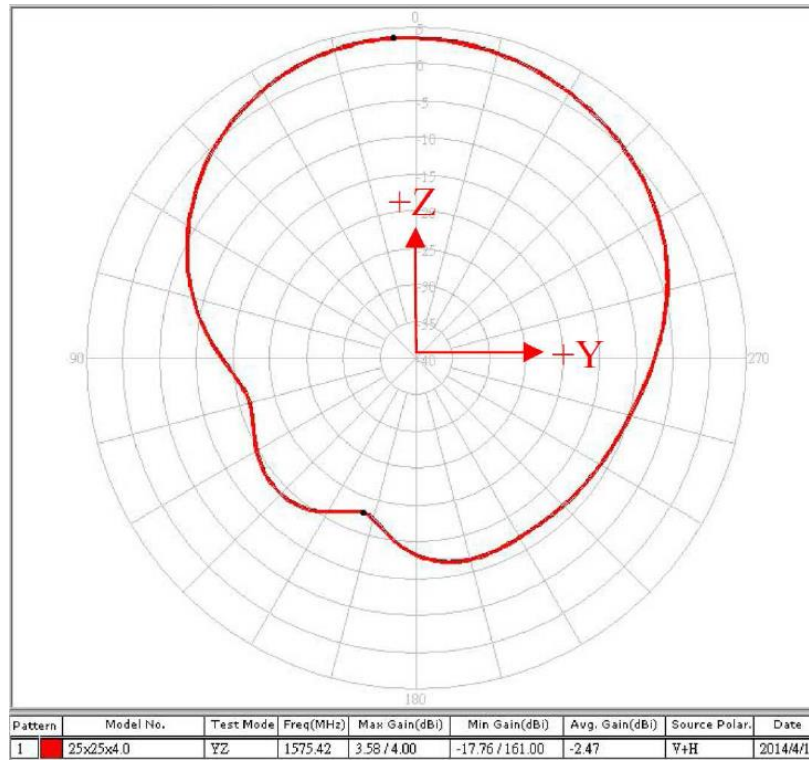

5.3.3. 1602 MHz XZ-Plane

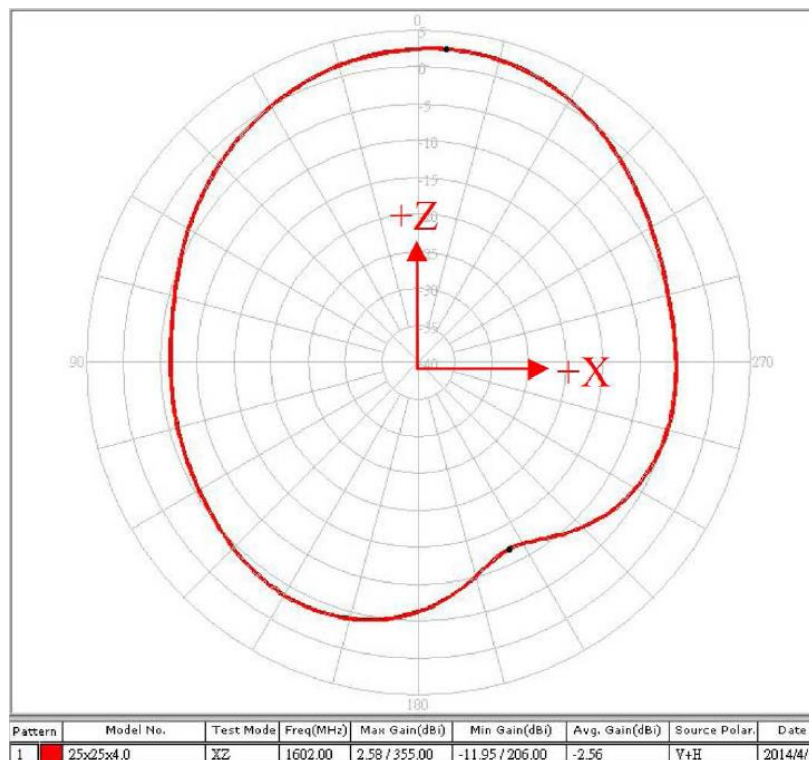


5.3.4. 1606 MHz YZ-Plane

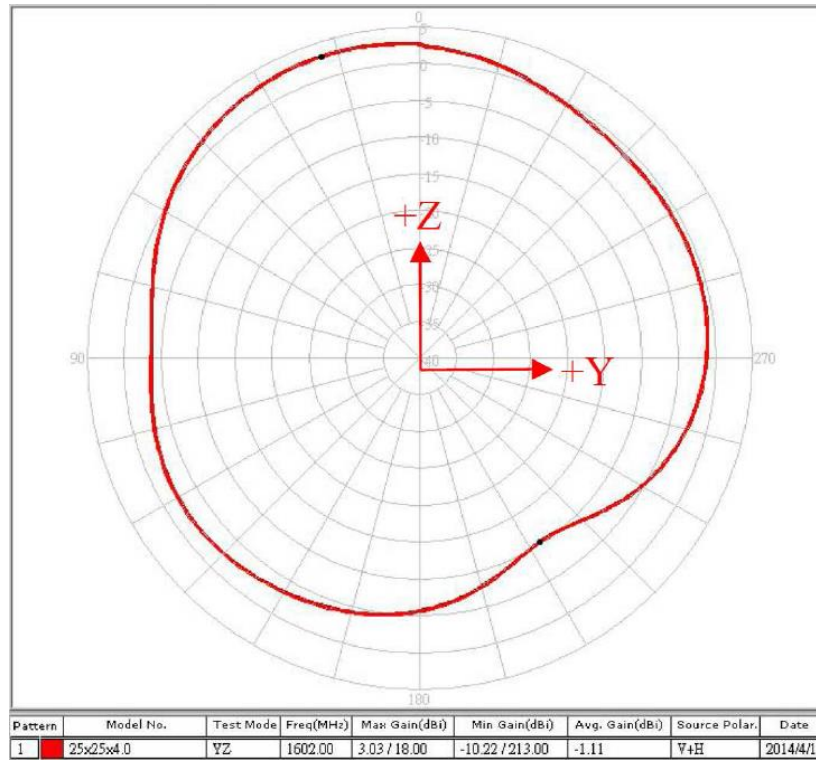


5.4. GPS-GLONASS-GALILEO - Low Noise Amplifier


5.4.1. S21_Gain

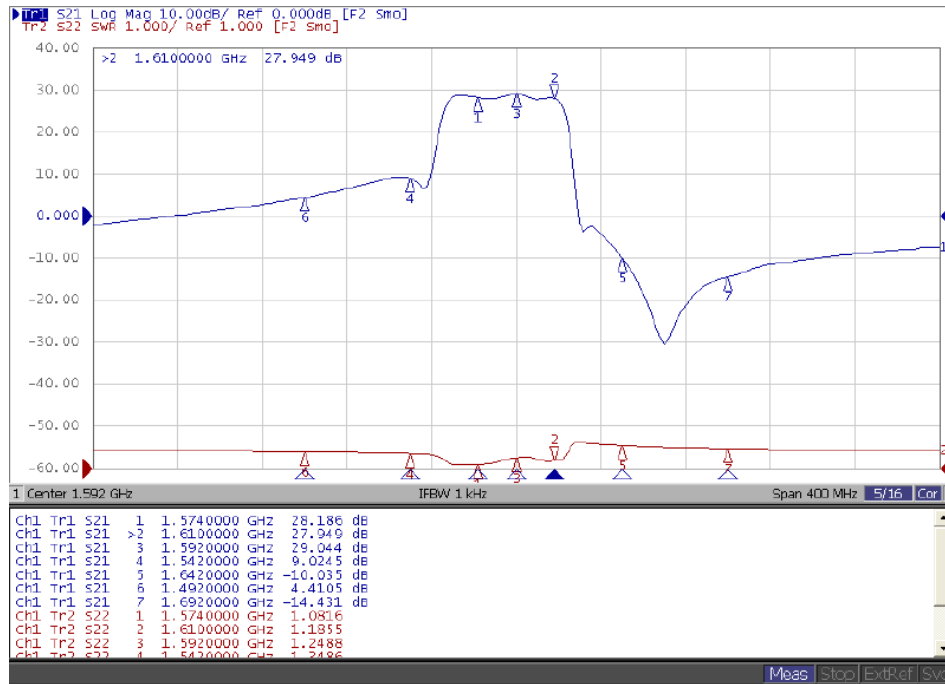

5.4.2. Noise Figure

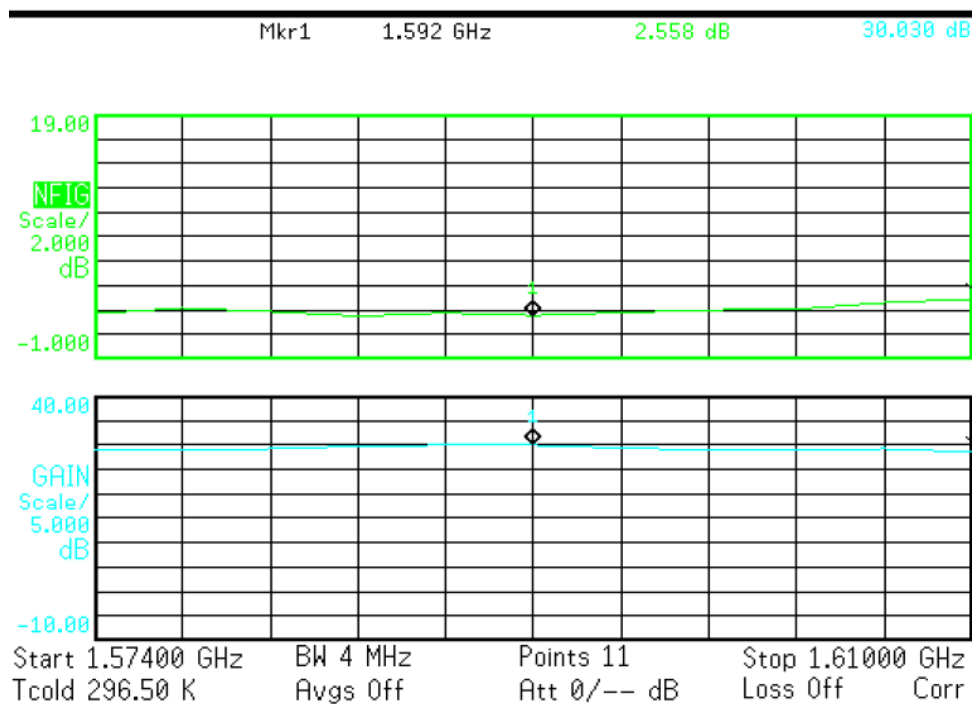


7. Installation

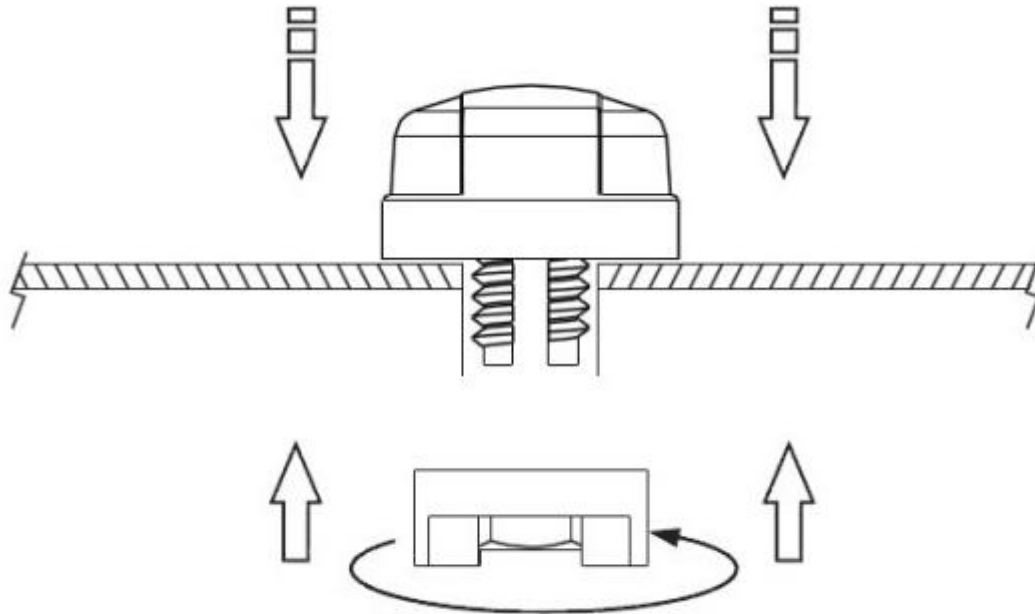

Recommended torque for Mounting is $24.5\text{N}\cdot\text{m}$

Maximum torque for mounting is $29.4\text{N}\cdot\text{m}$

8. Packaging

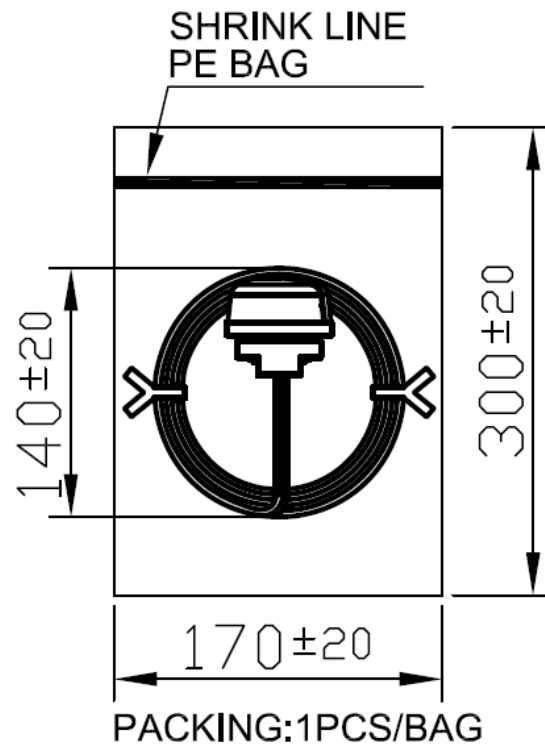

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.