
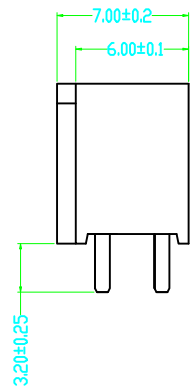


P. C. B Hole Layout

Specifications

- Current Rating: 3Ampere**
- Insulation Resistance: 1000MΩ MTN.**
- Dielectric Withstading: 600V AC**
- Contact Resistance: 20mΩ Max.**
- Operating Temprature: -40℃ to +105℃**
- Material**
- Contact Material: Copper Alloy**
- Contact Plating: Gold/Tin Over Nickel**
- Insulator: Glass Filled Polyester**
- PBT/6T/9T/LCP (UL 94V-0)**

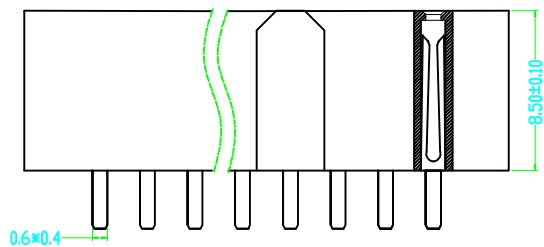

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1	
				X.	±0.30	X°	±5°		CHKD	DATE	2020. 04. 12
				.X	±0.20	.X°	±2°		APPD	UNITS	mm
				.XX	±0.08	.XX°	±1°		VIEW	SCALE	1:1
AO	MODIFICATION	DRAW	DATE	.XXX	±0.03	.XXX°	±0.5°	PRODUCT NAME	2.54mm Female Header Connectors		
VER								PART. NO.	PM254V-FD-12-xx-H85		
1	2	3	4	5	6	7	8	DWG. NO.	009		