
MATERIALS	
BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE

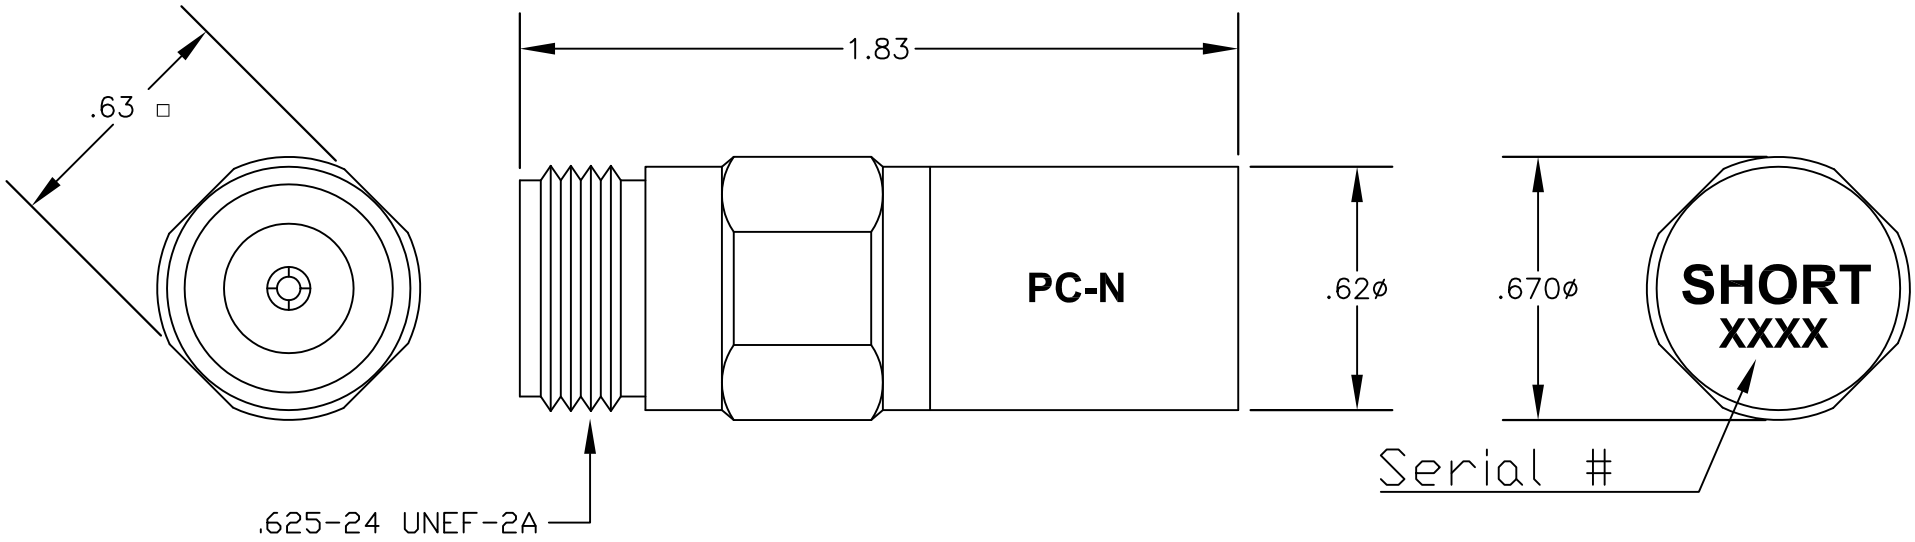

SPECIFICATIONS	UNITS	VALUE	DESCRIPTION
IMPEDANCE	OHMS	50	
FREQUENCY	GHz	18	DC TO 18 GHz
RETURN LOSS	dB	≤ 0.10	4 GHz
	dB	≤ 0.15	4 GHz TO ≤ 18 GHz
CONNECTOR			N FEMALE
LOAD RESISTANCE	OHMS	50± .25	
LOAD POWER HANDLING	WATTS	≤ 0.5	AT 18 GHz, 0°-50° C

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE **PE5501-4**

DES. Short Circuit; Female; PE5501-KIT component

REV. - | FSCM NO. 53919 | CAD FILE 021010 | SCALE N/A | SIZE A | 127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.