


# Data sheet

2018-04-23  
Product version 01  
Document revision 00

Order No.: 1017526

Type: TDPT 16/ 2-SC-10,16-ZB

PCB terminal block, Screw connection with tension sleeve

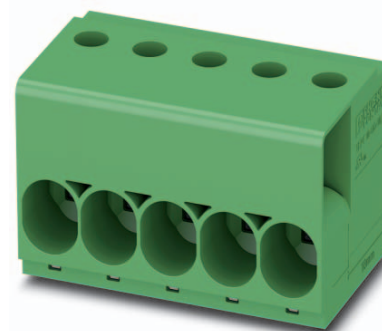

The figure shows a 5-pos. version of the product

## 1 Main features



- |                           |                                      |                        |                     |
|---------------------------|--------------------------------------|------------------------|---------------------|
| • No. of pos.             | 2                                    | • Nominal current      | 76 A                |
| • Conductor cross section | 16 mm <sup>2</sup>                   | • Nominal voltage      | 1000 V              |
| • Color                   | green                                | • Connection direction | 0 °                 |
| • Pitch                   | 10.16 mm                             | • Type of packaging    | packed in cardboard |
| • Connection method       | Screw connection with tension sleeve |                        |                     |

## 2 Your advantages

- ✓ Easy to adapt, thanks to their identical size and the same pinning for Push-in spring connections as for screw connections
- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force




Make sure you always use the latest documentation.  
It can be downloaded at: [phoenixcontact.net/product/1017526](https://phoenixcontact.net/product/1017526)

**1017526 TDPT 16/ 2-SC-10,16-ZB****3 Table of contents**

|    |                                                                  |    |
|----|------------------------------------------------------------------|----|
| 1  | Main features .....                                              | 1  |
| 2  | Your advantages .....                                            | 1  |
| 3  | Table of contents .....                                          | 2  |
| 4  | 3D model in PDF can be activated (Acrobat Reader only) .....     | 3  |
| 5  | item properties .....                                            | 4  |
|    | 5.1 Connection capacity .....                                    | 4  |
|    | 5.2 Material data .....                                          | 4  |
| 6  | Dimensions .....                                                 | 4  |
|    | 6.1 Dimensions for the product .....                             | 4  |
|    | 6.2 Dimensions for PCB design .....                              | 5  |
| 7  | Series drawing .....                                             | 6  |
| 8  | Packaging information .....                                      | 7  |
| 9  | Application .....                                                | 7  |
|    | 9.1 Temperature limit values .....                               | 7  |
|    | 9.2 Termination and connection method .....                      | 7  |
|    | 9.3 Pull-out test .....                                          | 7  |
| 10 | Electrical tests .....                                           | 8  |
|    | 10.1 Electrical data .....                                       | 8  |
|    | 10.2 Short-time withstand current test .....                     | 8  |
|    | 10.3 Aging test (climatic impact and corrosion testing) .....    | 8  |
|    | 10.4 Insulation resistance .....                                 | 8  |
|    | 10.5 Mechanical connection test for the PCB terminal block ..... | 8  |
|    | 10.6 Temperature-rise test .....                                 | 8  |
| 11 | Current carrying capacity/derating curves .....                  | 9  |
| 12 | Environmental and durability tests .....                         | 10 |
|    | 12.1 Assessment of fire risk (glow wire test) .....              | 10 |
|    | 12.2 Vibration test .....                                        | 10 |
| 13 | Approvals .....                                                  | 10 |
| 14 | Commercial Data .....                                            | 11 |
| 15 | Accessories .....                                                | 11 |

1017526 TDPT 16/ 2-SC-10,16-ZB

#### 4 3D model in PDF can be activated (Acrobat Reader only)

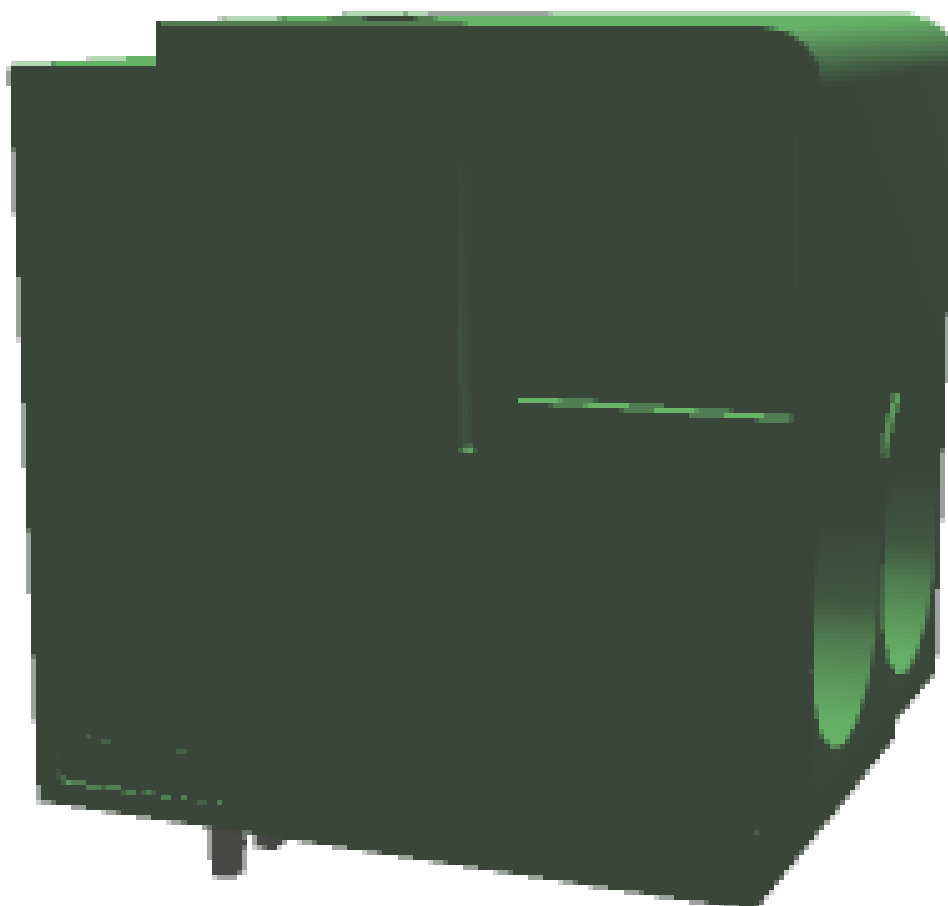

**1017526 TDPT 16/ 2-SC-10,16-ZB****5 item properties**

|                       |                                      |
|-----------------------|--------------------------------------|
| Order No.             | 1017526                              |
| Type                  | TDPT 16/ 2-SC-10,16-ZB               |
| Range of articles     | TDPT 16/...-SC                       |
| Pitch                 | 10.16 mm                             |
| Number of positions   | 2                                    |
| Connection method     | Screw connection with tension sleeve |
| Drive form screw head | Slotted (L)                          |
| Mounting type         | Wave soldering                       |
| Pin layout            | Zigzag pinning W                     |

**5.1 Connection capacity**

|                                                                       |                                            |
|-----------------------------------------------------------------------|--------------------------------------------|
| Conductor cross section, solid                                        | 0.75 mm <sup>2</sup> to 16 mm <sup>2</sup> |
| Conductor cross section, flexible                                     | 0.75 mm <sup>2</sup> to 16 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil                                     | 20 to 6                                    |
| 2 conductors with same cross section, solid                           | 0.5 mm <sup>2</sup> to 6 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded                        | 0.5 mm <sup>2</sup> to 6 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.75 mm <sup>2</sup> to 16 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve    | 0.75 mm <sup>2</sup> to 16 mm <sup>2</sup> |
| Stripping length                                                      | 18 mm                                      |

**5.2 Material data**

|                                                                   |                                                                         |         |
|-------------------------------------------------------------------|-------------------------------------------------------------------------|---------|
| Material of metal parts                                           |                                                                         |         |
| Note                                                              | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |         |
| Contact material                                                  | Cu alloy                                                                |         |
| Surface characteristics                                           | hot-dip tin-plated                                                      |         |
| Insulating material data                                          | Housing                                                                 | Housing |
| Insulating material                                               | PA                                                                      |         |
| CTI according to IEC 60112                                        | 600                                                                     |         |
| Flammability rating according to UL 94                            | V0                                                                      |         |
| Color                                                             | green (6021)                                                            |         |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850                                                                     |         |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775                                                                     |         |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C                                                                  |         |

**6 Dimensions****6.1 Dimensions for the product**

|                             |          |
|-----------------------------|----------|
| Length                      | 31.9 mm  |
| Width                       | 21.34 mm |
| Height (without solder pin) | 31.2 mm  |
| Total height                | 34.7 mm  |
| Solder pin [P]              | 3.5 mm   |
| Dimension a                 | 10.16 mm |


**1017526 TDPT 16/ 2-SC-10,16-ZB**

---

**6.2 Dimensions for PCB design**

|                |              |
|----------------|--------------|
| Hole diameter  | 1.85 mm      |
| Pin dimensions | 1,4 x 0,9 mm |

7 Series drawing

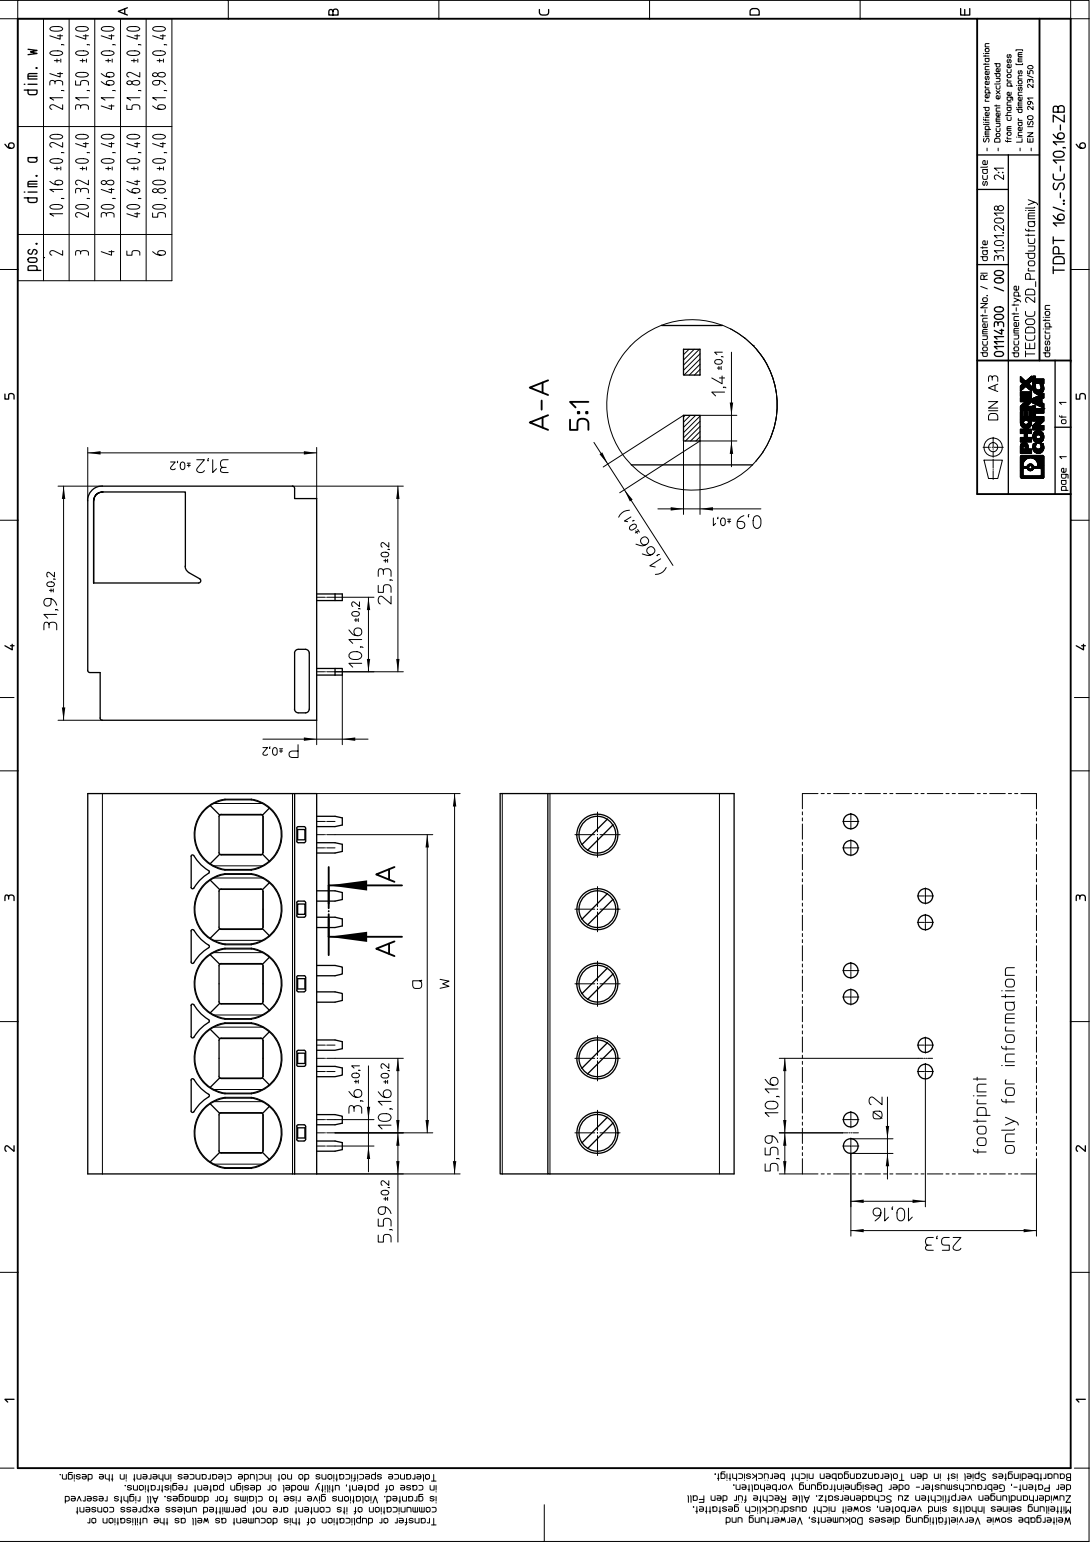

**1017526 TDPT 16/ 2-SC-10,16-ZB****8 Packaging information**

|                    |                     |
|--------------------|---------------------|
| Type of packaging  | packed in cardboard |
| Pieces per package | 50                  |

**9 Application****9.1 Temperature limit values**

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                         |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                         |
| Ambient temperature (operation)         | -40 °C (dependent on the derating curve) |

**9.2 Termination and connection method**

|                                            |                     |
|--------------------------------------------|---------------------|
| Specification                              | IEC 60999-1:1999-11 |
| Check for damage to conductor or loosening | Test passed         |

**9.3 Pull-out test**

|                                                                    |                                          |
|--------------------------------------------------------------------|------------------------------------------|
| Termination and connection method: pull-out test                   |                                          |
| Specification                                                      | IEC 60999-1:1999-11                      |
| Result                                                             | Test passed                              |
| Conductor cross section/conductor type/tractive force actual value | 0.75 mm <sup>2</sup> / stranded / > 30 N |
| Conductor cross section/conductor type/tractive force actual value | 0.75 mm <sup>2</sup> / solid / > 30 N    |
| Conductor cross section/conductor type/tractive force actual value | 16 mm <sup>2</sup> / stranded / > 100 N  |
| Conductor cross section/conductor type/tractive force actual value | 16 mm <sup>2</sup> / solid / > 100 N     |

**1017526 TDPT 16/ 2-SC-10,16-ZB****10 Electrical tests****10.1 Electrical data**

|                                         |                           |
|-----------------------------------------|---------------------------|
| Rated current / conductor cross section | 76 A / 16 mm <sup>2</sup> |
| Rated insulation voltage (III/2)        | 1000 V                    |
| Rated surge voltage (III/2)             | 8 kV                      |
| Contact resistance                      | 0.18 mΩ                   |
| Degree of pollution                     | 2                         |

**10.2 Short-time withstand current test**

|                                            |                               |
|--------------------------------------------|-------------------------------|
| Specification                              | IEC 60947-7-4:2013-08         |
| Result                                     | Test passed                   |
| Conductor cross section/short-time current | 16 mm <sup>2</sup> / 303 A AC |

**10.3 Aging test (climatic impact and corrosion testing)**

|                                                                      |                              |
|----------------------------------------------------------------------|------------------------------|
| Specification                                                        | IEC 60947-7-4:2013-08        |
| Result                                                               | Test passed                  |
| Contact resistance R <sub>1</sub>                                    | 0.18 mΩ / 16 mm <sup>2</sup> |
| Test sequence 1: low temperature storage                             | -40 °C / 2 h                 |
| Test sequence 2: heat storage                                        | 168 h/105 °C                 |
| Test sequence 3: noxious gas storage (ISO 6988)                      | KFW 0.2 S/1 cycle            |
| Contact resistance R <sub>2</sub>                                    | 0.18 mΩ / 16 mm <sup>2</sup> |
| Rated impulse voltage at sea level<br>Voltage waveform ≥ (1.2/50 μs) | 9.8 kV                       |
| Power-frequency withstand voltage<br>Voltage waveform ≥ (50/60 Hz)   | 4.2 kV                       |

**10.4 Insulation resistance**

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-3-1:2002-02 |
| Result        | Test passed           |

**10.5 Mechanical connection test for the PCB terminal block**

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60947-7-4:2013-08 |
| Result        | Test passed           |

**10.6 Temperature-rise test**

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60947-7-4:2013-08 |
| Result        | Test passed           |



**1017526 TDPT 16/ 2-SC-10,16-ZB****11 Current carrying capacity/derating curves**

Specification


IEC 60512-5-2:2002-02

Reduction factor

1

Number of positions

4

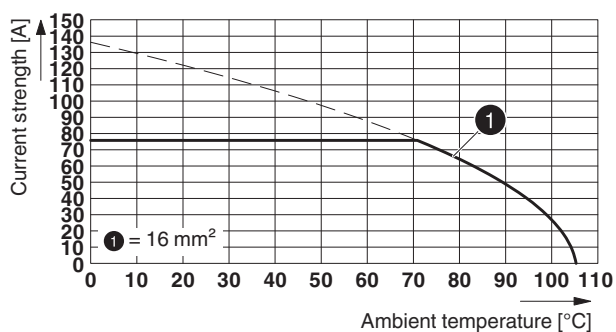**Type: TDPT 16/...-SC-10,16-ZB**

**1017526 TDPT 16/ 2-SC-10,16-ZB****12 Environmental and durability tests****12.1 Assessment of fire risk (glow wire test)**

|                  |                        |  |  |
|------------------|------------------------|--|--|
| Specification    | IEC 60695-2-10:2013-04 |  |  |
| Result           | Test passed            |  |  |
| Temperature      | 850 °C                 |  |  |
| Time of exposure | 5 s                    |  |  |

**12.2 Vibration test**

|                        |                        |  |  |
|------------------------|------------------------|--|--|
| Specification          | IEC 60068-2-6:2007-12  |  |  |
| Result                 | Test passed            |  |  |
| Frequency              | 10 - 150 - 10 Hz       |  |  |
| Sweep speed            | 1 octave/min           |  |  |
| Amplitude              | 0.35 mm (10 - 60.1 Hz) |  |  |
| Acceleration           | 5 g (60.1 - 150 Hz)    |  |  |
| Test duration per axis | 2.5 h                  |  |  |
| Test directions        | X-, Y- and Z-axis      |  |  |
| Contact interruption   |                        |  |  |

**13 Approvals**

|                                                                                                      |       |       |       |  |
|------------------------------------------------------------------------------------------------------|-------|-------|-------|--|
| cULus Recognized  |       |       |       |  |
| Use group                                                                                            | B     | C     | D     |  |
| mm <sup>2</sup> /AWG/kcmil                                                                           | 20-6  | 20-6  | 20-6  |  |
| Voltage                                                                                              | 600 V | 600 V | 300 V |  |
| Current                                                                                              | 58 A  | 58 A  | 10 A  |  |

**1017526 TDPT 16/ 2-SC-10,16-ZB****14 Commercial Data**

|                    |                                                      |
|--------------------|------------------------------------------------------|
| Order No.          | 1017526                                              |
| Type               | TDPT 16/ 2-SC-10,16-ZB                               |
| Pieces per package | 50                                                   |
| Net weight         | 19.31 g                                              |
| GTIN               | 4055626501581                                        |
|                    | Information that applies locally, see link on page 1 |
| Country of origin  | Information that applies locally, see link on page 1 |

**15 Accessories**

| Description                                                                                                                                           | Order No. | Type          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------|
| Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip | 1204520   | SZF 2-0,8X4,0 |