

Model:PE2815S-I

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Primary voltage:
110V/220V/230V,or producing as customerized.

Technical Index:

- Technical Index: PCB
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30°C ~ +70°C
- Work frequency: 50Hz ~ 60Hz
- Dielectric strength: 3.75KV 50Hz 1min




Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤33	%
Power	2	VA
Temperature rising	≤18	°C
No load loss	≤0.4	W
weight	85	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8.9V	8.9V×2	300mA	150mA×2
7.5V	7.5V×2	11.6V	11.6V×2	240mA	120mA×2
9V	9V×2	13V	13V×2	200mA	100mA×2
12V	12V×2	17.4V	17.4V×2	150mA	75mA×2
15V	15V×2	21.3V	21.3V×2	120mA	60mA×2
18V	18V×2	28.3V	28.3V×2	100mA	50mA×2
24V	24V×2	34.8V	34.8V×2	75mA	37mA×2

Schematic Diagram:

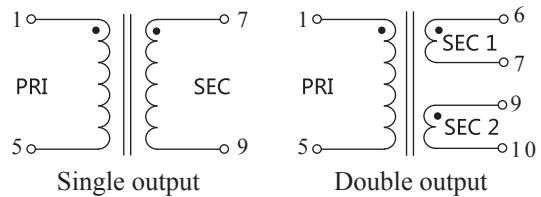

Dimension (in mm) :

