



1. Dimensions:

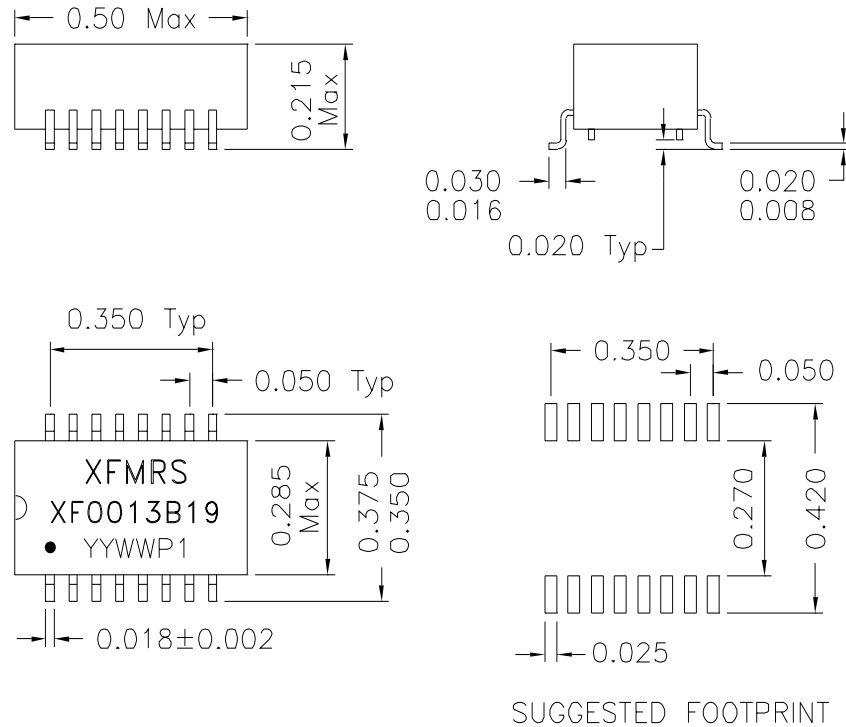

2. Schematic:

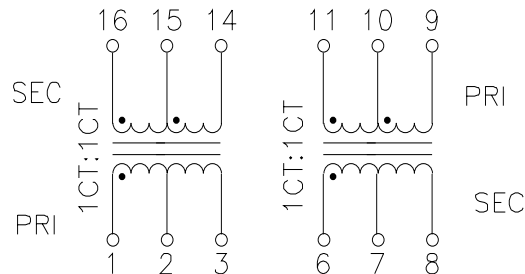

3. Electrical Specifications:@25°C

- Isolation Voltage: 1500 VAC
- Turns Ratio: (1-2-3):(16-15-14)=1CT:1CT ±3%
- Turns Ratio: (6-7-8):(11-10-9)=1CT:1CT ±3%
- PRI OCL: 1.5mH Min @100KHz 50mV
- Cw/w: 45pF Maximum @100KHz 50mV (Pri/Sec)
- Leakage Inductance: 0.6uH Maximum @100KHz 50mV @PRI, WITH SEC SHORTED
- DC Resistance: 1.0 Ohms Maximum (each wdg)
- CROSSTALK (0.5-5MHz): -65dB Typ
- EXTENDED OPERATING TEMPERATURE: -40°C to +85°C

DOC. REV: A/1

XFMRs Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SHEET 1 OF 1	Title: SMD T1/E1 ISOLATION MODULE	
	P/N: XFO013B19	REV. A
	DWN. 李清儿	Aug-08-97
	CHK. 孙悦	Aug-08-97
APP. Joe Huff	Aug-08-97	