

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE: 20 --- 200 V
CURRENT: 1.0 A


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- Case : R-1 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, method 2026
- Polarity: color band denotes cathode end
- Mounting Position : Any
- Weight : 0.007ounce,0.20 gram

R - 1

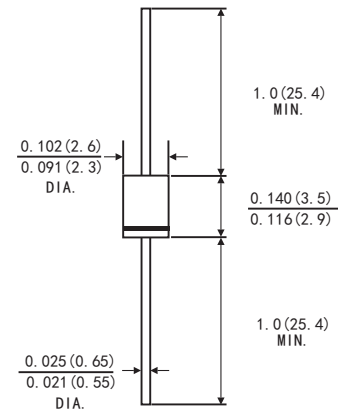

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		Symbols	1S20	1S30	1S40	1S50	1S60	1S80	1S100	1S150	1S200	Units
Maximum repetitive peak reverse voltage		V _{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS voltage		V _{RMS}	14	21	28	35	42	57	71	105	140	Volts
Maximum DC blocking voltage		V _{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length(see Fig. 1)		I(AV)	1.0									Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	40.0									Amps
Maximum instantaneous forward voltage at 1.0 A(Note 1)		V _F	0.55			0.70		0.85		0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	T _A =25°C	I _R	0.2									mA
	T _A =100°C		10									
Typical junction capacitance(Note 3)		C _J	110									pF
Typical thermal resistance(Note 2)		R _{θJA}	50.0									°C/W
Operating junction temperature range		T _J	-65 to+150									°C
Storage temperature range		T _{STG}	-65 to+150									°C

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance (from junction to ambient)Vertical P.C.B. mounted , 0.5"(12.7mm)lead length

3.Measured at 1.0MHz and reverse voltage of 4.0 volts

FIG.1-FORWARD CURRENT DERATING CURVE

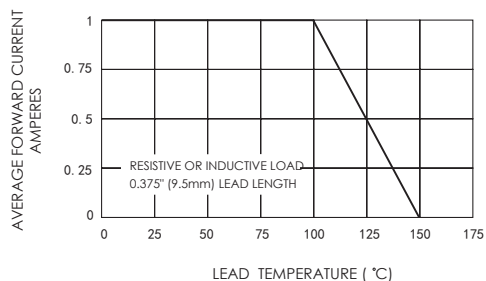


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

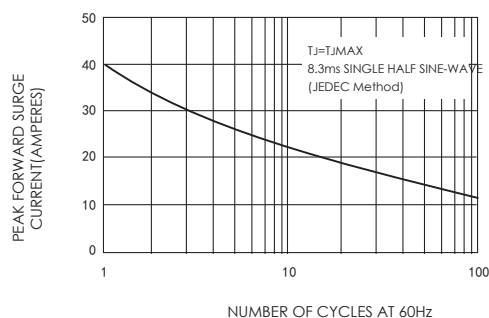


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

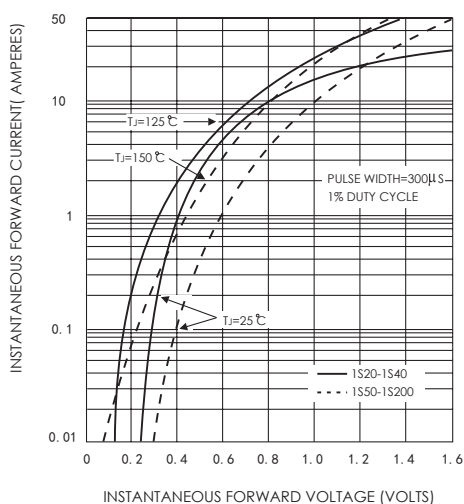


FIG.4-TYPICAL REVERSE CHARACTERISTICS

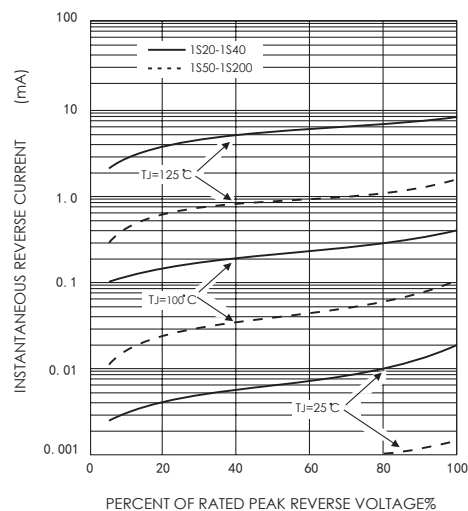


FIG.5-TYPICAL JUNCTION CAPACITANCE

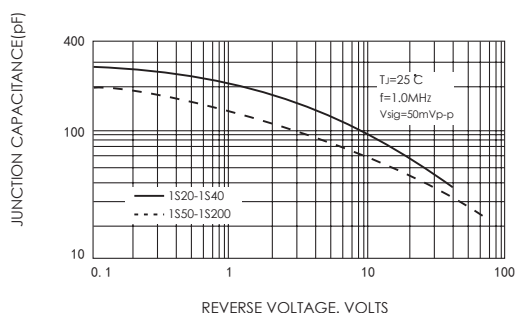


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

