
ADELS contact

## Screw Connectors

# 500 LRZ/11 MDS GW

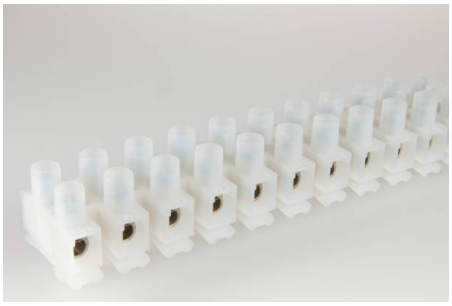

Terminal Block, 11 pole, Insulating Material: PA 6-GW, Cross-Section: 2.5 mm², Pin Spacing: 10.0 mm, Centre Stop (MDS): yes, Fixing: Catch Pin, Voltage Rating: 450 V, Current Rating: 24 A

## Order Info

| | |
|---|---|
| **Reference Number (ref. no.)** | 1245GBM |
| **Applications** | Lighting, Installation, Electrical Appliances |
| **PU** | 0 |

## Type

| | |
|---|---|
| **Type** | Terminal Block |
| **Number of poles** | 11 pole |
| **Clamping Units per Pole** | 1 |
| **Colour** | white |
| **Cross-Section** | 2.5 mm² |
| **Connection Type** | Screw |
| **Centre Stop (MDS)** | yes |

## Technical Data

| | |
|---|---|
| **Voltage Rating** | 450 V |
| **Current Rating** | 24 A |
| **Insulating Material** | PA 6-GW |
| **Contact Material** | Brass |
| **Core Cross-Section min.** | 0.5 mm² |
| **Core Cross-Section max.** | 2.5 mm² |
| **Flammability Rating** | V-2 |
| **max. Ambient Temperature Operation** | 85 °C |
| **Type of Conductor Solid** | yes |
| **Type of Conductor Flexible** | yes |
| **Type of Conductor Stranded** | yes |
| **Stripping Length** | 7.0-7.5 mm |
| **Assembly Contact Screw** | 0.8x4.0 / ↻ 0.5 Nm |
| **Pin Spacing** | 10.0 mm |
| **Fixing** | Catch Pin |
| **Approbation EN60998** | 500_EN60998_20070808_20160412_VDE_ENEC_40021791_web.pd |
| **Approbation UL** | 500_1000_19770222_20071007_UL_E63492_1-01_Description_wet |
| **Approbation CSA** | Schraub_Steck_Schraubenlos_SI_Klemmen_20160429_CSA_700765 |

## Accessories

| | |
|---|---|
| **ZEL 110** | 196420 |