
4803, Socket, solder terminal, screened, 6.3 mm, 2-pole, straight, UK-Connector

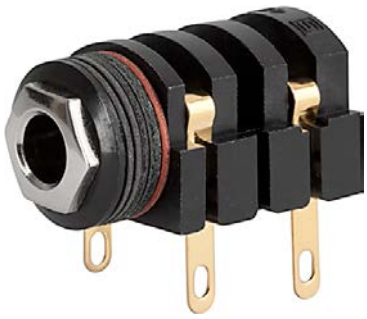

PHASE-OUT

Description

- Solder terminal :
  Screw-on mounting , from rear-side
- Data and Signal transfer
- Data and Signal Connectors 2-pole , shielded , straight
- Reinforced gold plating for increased insertions

References


Alternative: Housing insulated 4803.2210
Last order date: 30.06.2016

Technical Data


Diameter	6.3 mm
Number of Poles	2-pole
Ratings DC	2 A / 12 VDC
Ratings AC	2 A / 12 VAC
Dielectric Strength	1000 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal
Mounting	Screw-on mounting wall thickness max. 5.0 mm
Housings	screened
Style	straight
Lifetime	10000 Insertions

Dimensions

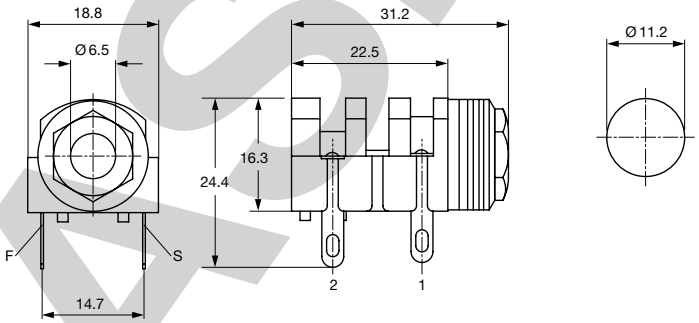

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	6.3	2-pole	solder terminal	4803.2200

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit 100 Pcs

PHASE-OUT

21.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.