


| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| PDS. 1          | PDS. 2 | PDS. 3 |
|                 |        |        |
| DN              | OFF    | (DN)   |
| 2-3             | OPEN   | 2-1    |

( )=Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V AC or 28VDC;  
1A @250V AC
5. FIXED TERMINAL/MOVING CONTACT:  
COPPER ALLOY W/Silver plate
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C

\*\*SHOWN ACTUATED  
FOR REF. ONLY

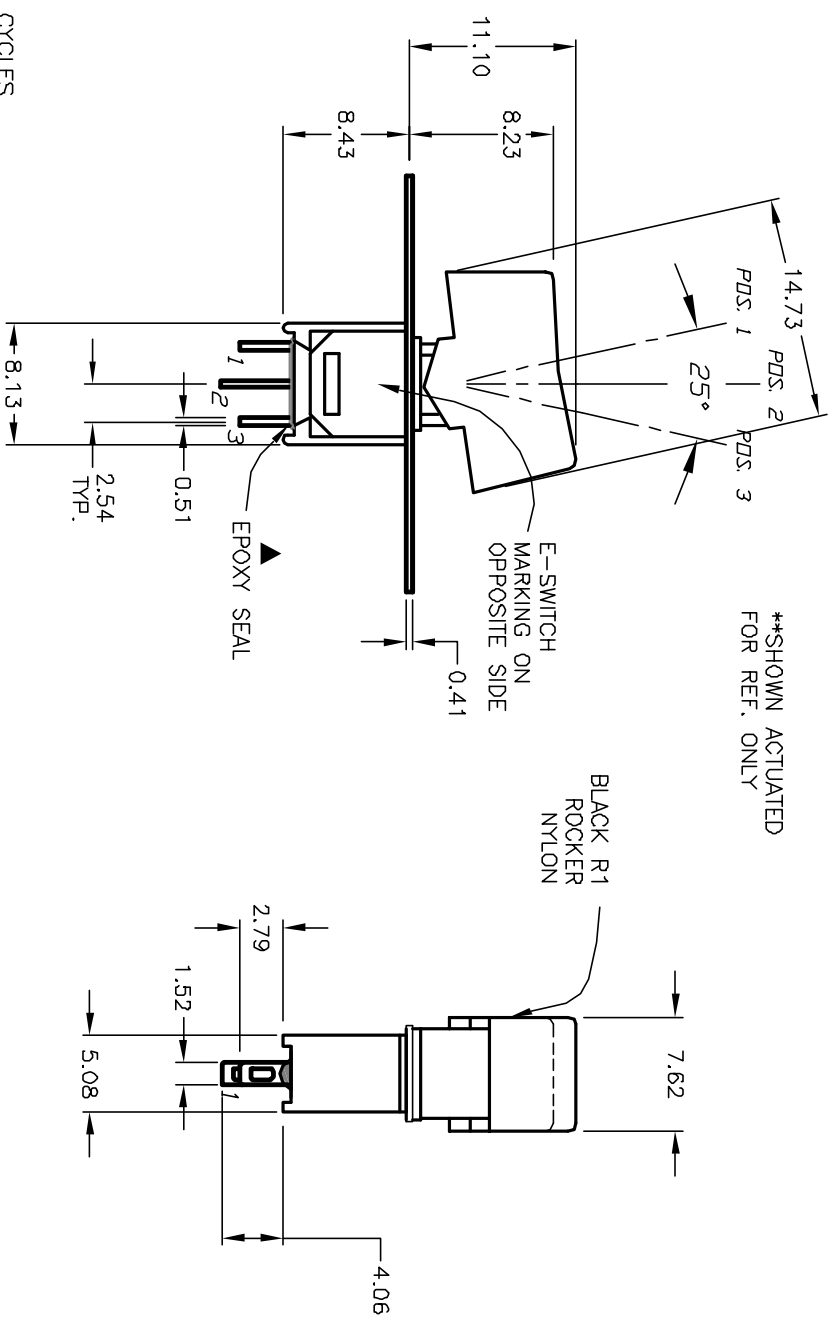

|      |  |         |  |             |  |
|------|--|---------|--|-------------|--|
|      |  |         |  | TITLE       |  |
| A    |  | 12689   |  | RELEASED    |  |
| REV. |  | ECN NO. |  | DESCRIPTION |  |
|      |  |         |  | DATE        |  |
|      |  |         |  | CHKD        |  |
|      |  |         |  | SCALE       |  |
|      |  |         |  | 2:1         |  |
|      |  |         |  | DATE        |  |
|      |  |         |  | 1/3/03      |  |
|      |  |         |  | DR          |  |
|      |  |         |  | CB          |  |
|      |  |         |  | DWG         |  |
|      |  |         |  | T415008     |  |
|      |  |         |  | REV         |  |
|      |  |         |  | A           |  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

**E-SWITCH®**

400 MSP-5 R1 (BLK) M1 QE