

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0877595064](#)
Status: **Active**
Overview: [milligrid](#)
Description: 2.00mm (.079") Pitch Milli-Grid™ Header, Surface Mount, Vertical, 50 Circuits, 0.38μm (15μ") Gold (Au) Selective Plating, without Press-fit Plastic Pegs, Pick-and-Place Cap, Tube Packaging, Lead-free

Documents:

3D Model	Product Specification PS-87761-100 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E29179
----	--------

General

Product Family	PCB Headers
Series	87759
Application	Board-to-Board
Overview	milligrid
Product Name	Milli-Grid™

Physical

Breakaway	Yes
Circuits (Loaded)	50
Circuits (maximum)	50
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height (in)	0.150 In
Mated Height (mm)	3.80 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (μin)	15
Plating min: Mating (μm)	0.38
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	Pick and Place Cap
Shrouded	No
Stackable	No
Temperature Range - Operating	-55°C to +105°C




image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status
Not Reviewed**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87759Series](#)

Mates With
[79107](#) Milli-Grid™ Receptacle, Vertical,
Through Hole. [79108](#) Milli-Grid™ Flex-to-
Board, Vertical Receptacle. Milli-Grid™
Receptacle, Surface Mount. [79109](#). [87381](#)

Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	2A
Voltage - Maximum	125V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-89990-476
Product Specification	PS-87761-100
Sales Drawing	SD-87759-117

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F


E

D

C

B




A

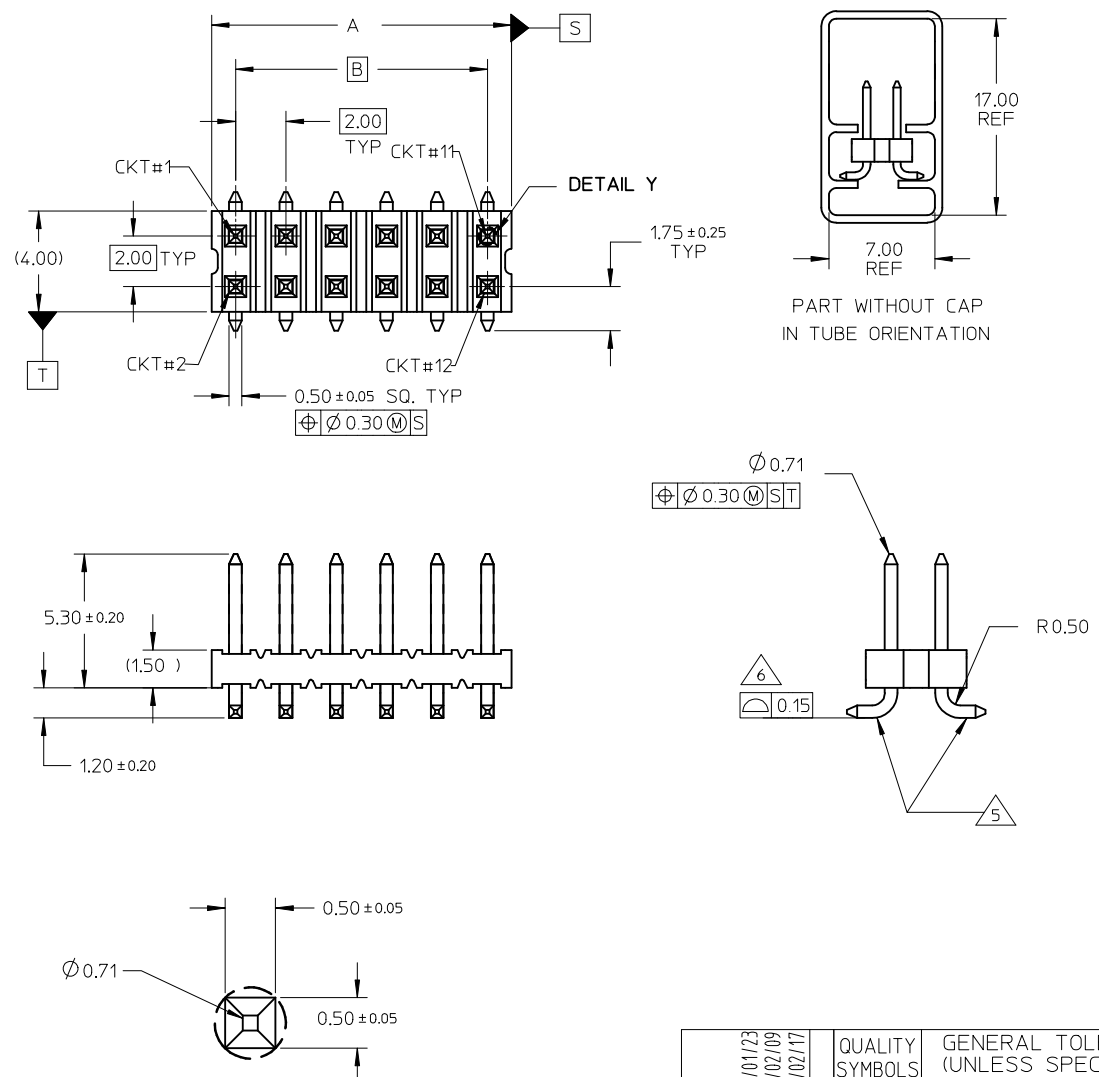



- NOTE:
1. MATERIAL:
HSG & CAP - NYLON, GLASS FILLED
UL 94V-0, COLOUR BLACK

PIN - 0.50 SQ PHOSPHOR BRONZE
 2. PLATING:
0.38um MIN GOLD PLATE AT CONTACT AREA,
TIN PLATE AT SOLDER AREA,
BOTH OVER NICKEL UNDERPLATE
 3. PIN PUSHOUT FORCE: 1KG MIN IN EITHER DIRECTION
 4. PRODUCT SPEC PS-87761-100 APPLIES.
 - 5 BEND DEPRESSION IS ACCEPTABLE SO LONG AS IT DOES NOT AFFECT THE OVERALL COPLANARITY OF TAIL.
 - 6 COPLANARITY IS TO BE MEASURED BY RESTING THE SOLDER TAIL ON A FLAT SURFACE.
 - 7 CAP TO BE LOCATED AS CENTRAL OF PART AS POSSIBLE
TOP SURFACE OF CAP TO BE FLAT FOR THE PURPOSE OF PICK & PLACE BY VACUUM SUCTION NOZZLE.
 8. FOR ILLUSTRATION PURPOSES, 12CKT IS SHOWN.
 - 9 CKT 4 & 6 IS CUT FROM CKT 8 & 12 RESPECTIVELY
ROUGH EDGES ARE EXPECTED ALONG THE CUTTING EDGES.
 - 10 PART TO BE PACKED IN TRAY ONLY.
 11. TUBE LENGTH IS 560MM REF STANDARD.

ADD. OPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: S2009-0510		DRAWN BY: DRW:ATSEE		mm		MM ONLY		NTS	METRIC		
2009/01/23		2009/02/09		INCH		DRAWN BY: KSEE		DATE: 2003/12/12		TITLE: CUSTOM HEADER	
2009/02/09		2009/02/17		4 PLACES ± ---		CHECKED BY: KCL ING		DATE: 2004/01/12		MGRID, 2MM DUAL ROW HDR. SMT	
2009/02/17				3 PLACES ± ---		APPROVED BY: SKTOH		DATE: 2004/01/12		MOLEX INCORPORATED	
				2 PLACES ± 0.2		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87759-117		SHEET NO. 1 OF 6	
				1 PLACE ± ---		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				ANGULAR ± 3 °							
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

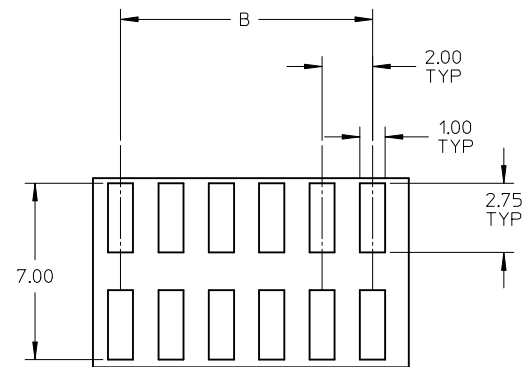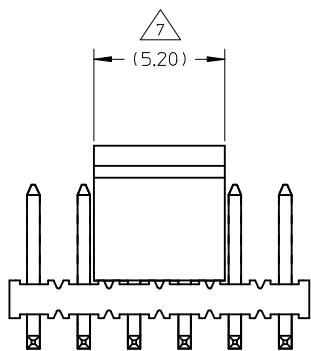


RECOMMENDED SOLDER PAD LAYOUT

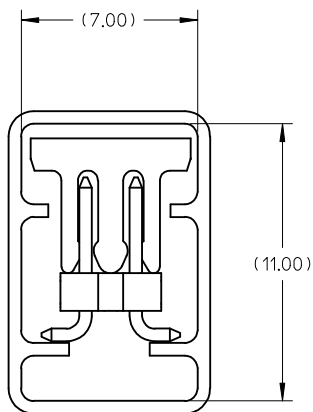

ADD. OPTION EC NO: S2009-0510 DRAWN:ATSEE CHK'D:SKANG APPR:MLONG 2009/01/23 2009/02/09 2009/02/17	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY KSEE	DATE 2003/12/12	TITLE CUSTOM HEADER MGRID, 2MM DUAL ROW HDR. SMT				
			4 PLACES	± ---	± ---	CHECKED BY KCLING	DATE 2004/01/12					
			3 PLACES	± ---	± ---	APPROVED BY SKTOH	DATE 2004/01/12	MOLEX MOLEX INCORPORATED				
			2 PLACES	± 0.2	± ---	MATERIAL NO. SEE TABLE						
		1 PLACE	± ---	± ---	SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		ANGULAR ± 3 °			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							


10 9 8 7 6 5 4 3 2 1

EMBOSSED CARRIER TAPE TYPE "A"

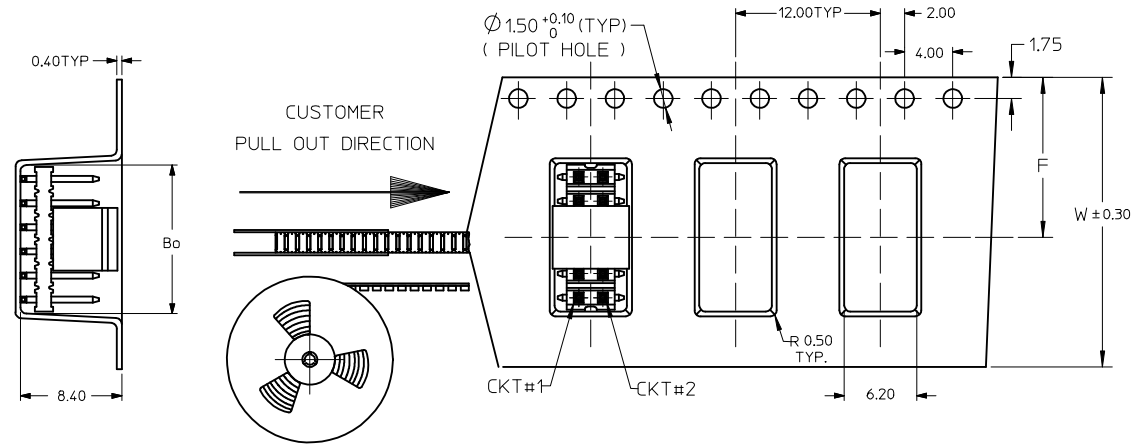


NOTES:

12. LEADER AND TRAILER TAPE

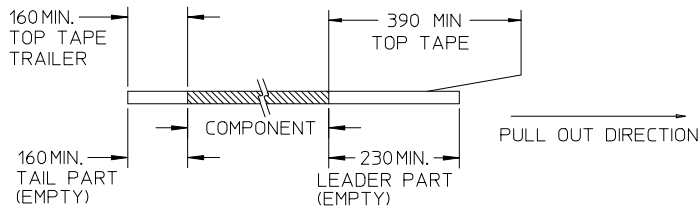

13. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)




14. PACKAGING STANDARD IS AS PER EIA-481.

15. TAPE & REEL QUANTITY = 750 PCS/REEL

16. THE TAPE IS TREATED FOR ANTI-STATIC

ADD. OPTION EC NO: S2009--0510 2009/01/23 DRW:ATSEE CHK'D:SKANG 2009/02/09 APPR:MLONG 2009/02/17	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
					DRAWN BY	DATE	TITLE CUSTOM HEADER MGRID, 2MM DUAL ROW HDR. SMT					
					CHECKED BY	DATE						
					APPROVED BY	DATE						
					ANGULAR ± 3 °		SKT0H	2004/01/12	MOLEX	MOLEX INCORPORATED		
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.					
							SEE TABLE		SD-87759-117		3 OF 6	
B2	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										


EMBOSSED CARRIER TAPE TYPE "B"

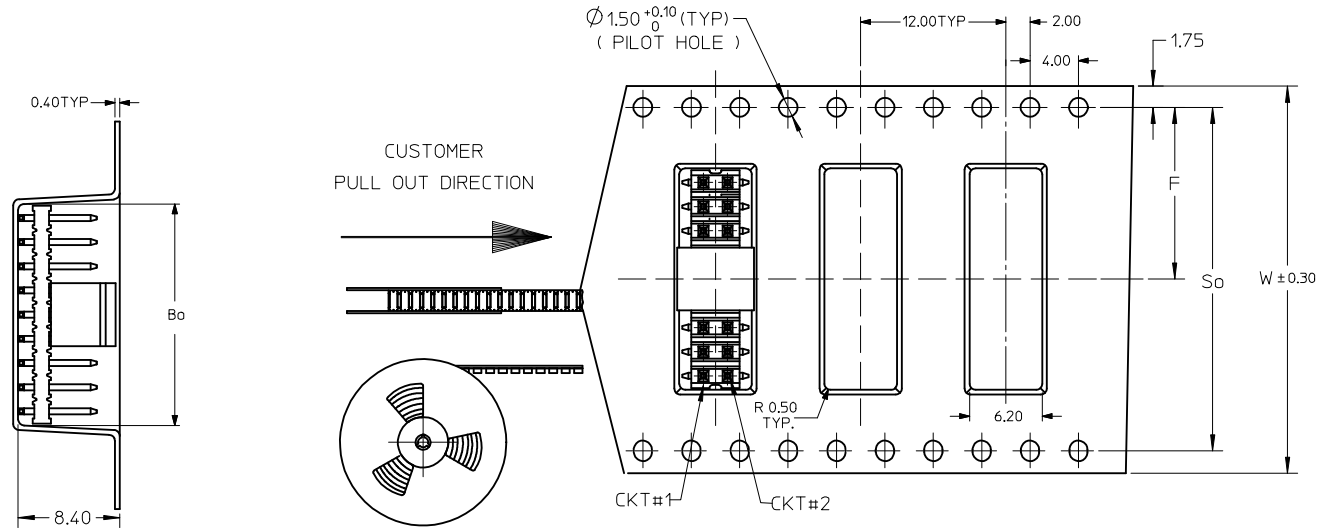

ADD. OPTION EC NO: S2009--0510 2009/01/23 DRWN:ATSEE 2009/02/09 CHKD:SKANG 2009/02/17 APPR:MLONG	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY KSEE	DATE 2003/12/12	CUSTOM HEADER MGRID, 2MM DUAL ROW HDR. SMT				
			4 PLACES	±---	±---	CHECKED BY KCLING	DATE 2004/01/12					
			3 PLACES	±---	±---	APPROVED BY SKTOH	DATE 2004/01/12	MOLEX INCORPORATED				
			2 PLACES	±0.2	±---	MATERIAL NO. SEE TABLE						
			1 PLACE	±---	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
			ANGULAR ± 3 °									

B2	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
----	-----	--	--	--	--	--	--	--	--	--	--

THIS TYPE OF CARRIER IS FOR CKT SIZE 8 AND BELOW.

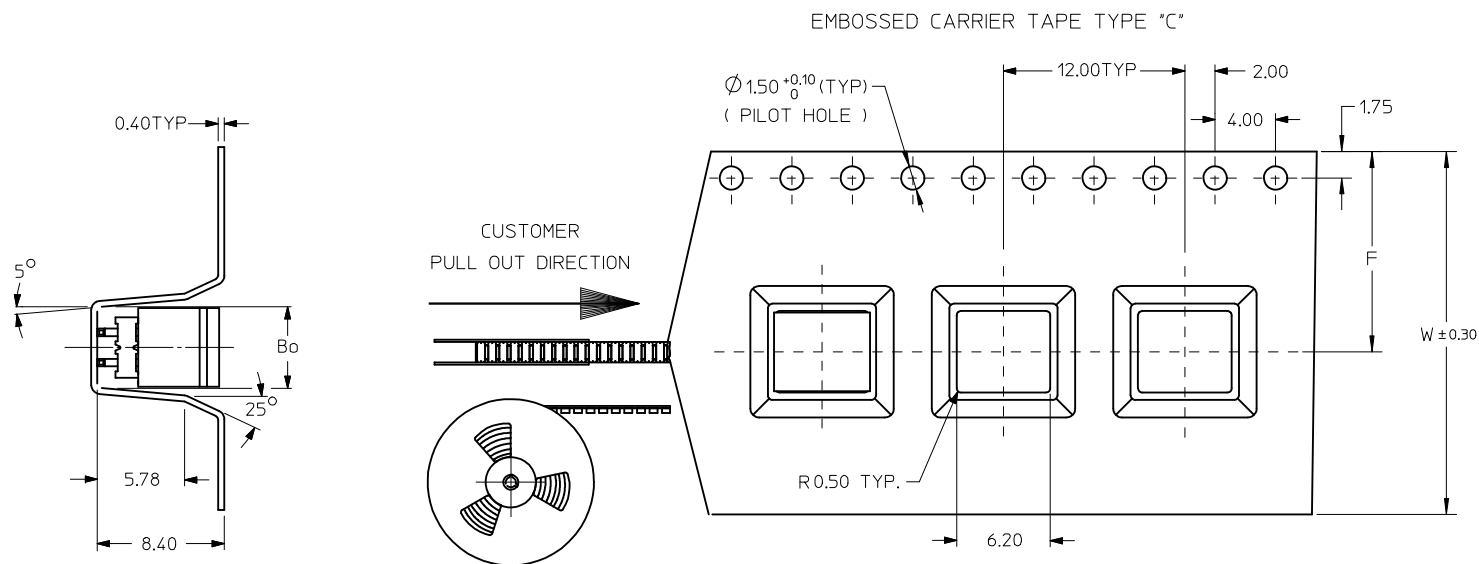

ADD. OPTION EC NO: S2009-0510 2009/01/23 DRWN:ATSEE CHKD:SKANG 2009/02/09 APPR:MLONG 2009/02/17	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY KSEE	DATE 2003/12/12	TITLE CUSTOM HEADER MGRID, 2MM DUAL ROW HDR. SMT				
					CHECKED BY KCLING	DATE 2004/01/12					
					APPROVED BY SKTOH	DATE 2004/01/12					
			ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-87759-117		5 OF 6		
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

