
Push Button


FRONT PANEL MOUNTING




- S.P. Push to Make
- Solder Tags
- Nylon Body & Button

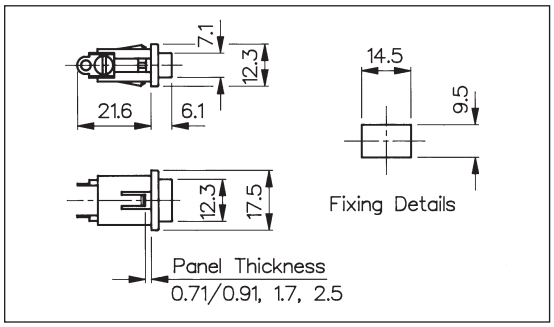


SWITCH CONTACT OPERATION




S.P. Push to Make
S.P.M.B.



S.P.C.O.



D.P.C.O.



D.P.M.B.

Specification	MP0022/Colour
Terminations:	Solder Tags
Switching:	S.P. Push to Make Slow Momentary Action
Max. Rating:	0.25A. 250Vac, 0.5A. 110Vac, 1A. 0.1 to 28Vac/dc
Contact Resistance:	<15mΩ
Insulation Resistance:	$>10^4$ MΩ
Dielectric Strength:	>2.5kVac
Operating Temp. Range:	–20°C to +70°C
Sealing:	
Materials: Moulding: Tags: Body:	 Nylon Brass, Silver Plated Nylon
Contacts/Terms:	Brass, Silver Plated
Variants:	Button Colours: Standard - Black, /WH (White) and /RD (Red). /TERM - (Screw terminals)
RoHS	Compliant