19-1708; Rev 2; 5/02

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

General Description

The MAX4674 is a low-voltage CMOS analog switch containing four 2:1 multiplexers/demultiplexer. When powered from a single +5V supply, it features a low 4Ω max on-resistance (R_{ON}), 0.4Ω max R_{ON} matching between channels, and 0.8Ω RON flatness over the entire signal range. Off-leakage current is only 0.5nA max at +25°C.

The MAX4674 features fast turn-on (t_{ON}) and turn-off (t_{OFF}) times of 18ns and 6ns, respectively, and is available in QFN, QSOP, TSSOP, and SO packages.

This low-voltage multiplexer operates with a +1.8V to +5.5V single supply. All digital inputs have +0.8V and +2.4V logic thresholds, ensuring TTL/CMOS-logic compatibility with +5V operation.

Applications

10/100 Base-T

ATM Switching

Audio and Video Signal Routing

Low-Voltage Data-Acquisition Systems

Communications Circuits

Relay Replacement

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.


Features

- **Guaranteed On-Resistance**
  4Ω max (+5V Supply)
  6Ω max (+3V Supply)
- **Guaranteed Match Between Channels**
  0.4Ω max
- **Guaranteed Flatness Over Signal Range**
  0.8Ω max
- **1.8V Operation**
  R_{ON} = 100Ω typ Over Temperature
  t_{ON} = 51ns typ
  t_{OFF} = 13ns typ
- **Guaranteed Low Leakage Currents**
  0.5nA max at +25°C
- **Single-Supply Operation from +1.8V to +5.5V**
- **Rail-to-Rail® Signal Handling**
- **TTL/CMOS-Logic Compatible**
- **Crosstalk: -114dB (1MHz)**
- **Off-Isolation: -67dB (1MHz)**
- **4mm × 4mm QFN Package**

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX4674EEE	-40°C to +85°C	16 QSOP
MAX4674EUE	-40°C to +85°C	16 TSSOP
MAX4674ESE	-40°C to +85°C	16 Narrow SO
MAX4674EGE	-40°C to +85°C	16 QFN
MAX4674EGP	-40°C to +85°C	20 QFN

Pin Configuration/Functional Diagram/Truth Table

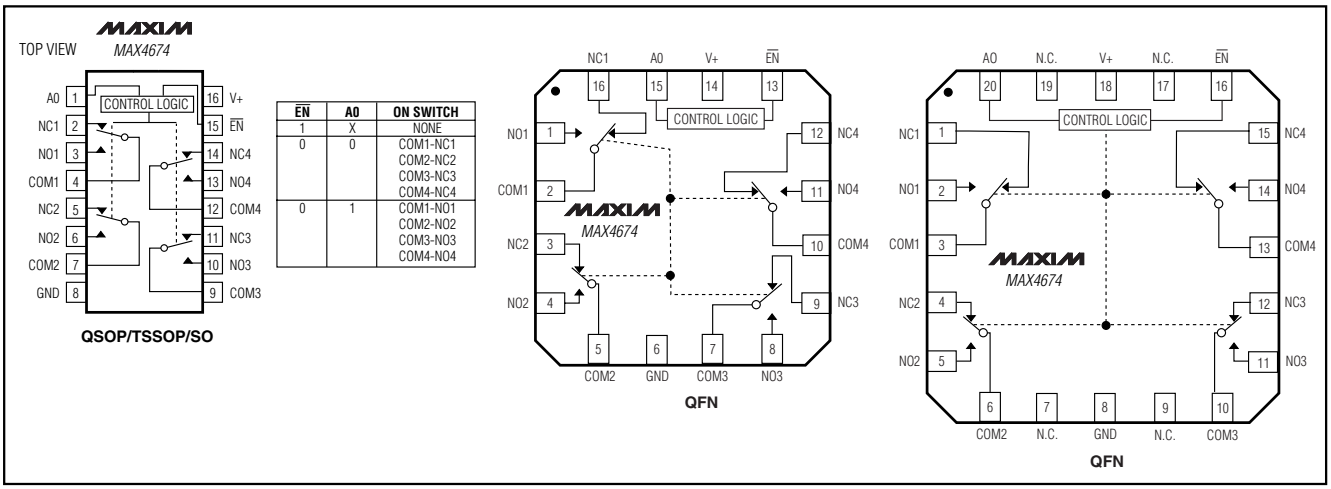

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

ABSOLUTE MAXIMUM RATINGS

V+, A0, $\overline{EN}$.....-0.3V to +6V
COM_, NO_, NC_ (Note1).....-0.3V to (V + 0.3V)
Continuous Current COM_, NO_, NC_ .....±100mA
Peak Current (COM_, NO_, NC_)
(pulsed at 1ms, 10% duty cycle) .....±300mA
Continuous Power Dissipation (T_A = +70°C)
16-Pin QSOP (derate 8.3mW/°C above +70°C) 667mW
16-Pin TSSOP (derate 6.7mW/°C above +70°C) 533mW
16-Pin Narrow SO (derate 8mW/°C above +70°C) 640mW
16-Pin QFN (derate 18.5mW/°C above +70°C) 1481mW
20-Pin QFN (derate 20mW/°C above +70°C) 1600mW
Operating Temperature Range
MAX4674E_E .....-40°C to +85°C
Die Temperature .....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Note 1: Signals on NO_, NC_, and COM_ exceeding V+ or GND are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Single +5V Supply

(V+ = +4.5V to +5.5V, V_{IH} = 2.4V, V_{IL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values at T_A = +25°C.) (Notes 2, 9)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	$V_{COM_}$,$V_{NO_}$, $V_{NC_}$			0		V+	V
On-Resistance	R_{ON}	V+ = 4.5V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		2.2	4	Ω
			T_A = T_{MIN} to T_{MAX}			5	
On-Resistance Match Between Channels (Notes 3, 8)	ΔR_{ON}	V+ = 4.5V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		0.15	0.4	Ω
			T_A = T_{MIN} to T_{MAX}			0.5	
On-Resistance Flatness (Note 4)	$R_{FLAT (ON)}$	V+ = 4.5V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		0.5	0.8	Ω
			T_A = T_{MIN} to T_{MAX}			1	
NO_, NC_ Off-Leakage Current (Note 5)	$I_{NO_(OFF)}$, $I_{NC_(OFF)}$	V+ = 5.5V; $V_{COM_}$ = 1V, 4.5V; $V_{NO_}$ or $V_{NC_}$ = 4.5V, 1V	T_A = +25°C	0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	
COM_ Off-Leakage Current (Note 5)	$I_{COM_(OFF)}$	V+ = 5.5V; $V_{COM_}$ = 1V, 4.5V; $V_{NO_}$ or $V_{NC_}$ = 4.5V, 1V	T_A = +25°C	0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	
COM_ On-Leakage Current (Note 5)	$I_{COM_(ON)}$	V+ = 5.5V; $V_{COM_}$ = 1V, 4.5V; $V_{NO_}$ or $V_{NC_}$ = 1, 4.5V, or floating	T_A = +25°C	0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	
DIGITAL I/O (A0, $\overline{EN}$)							
Input Logic High	V_{IH}			2.4			V
Input Logic Low	V_{IL}					0.8	V
Input Leakage Current	I_{IN}	V_{IN} = 0 or +5.5V		-0.5	1	0.5	µA
DYNAMIC							
Turn-On Time (Note 5)	t_{ON}	$V_{NO_}$ or $V_{NC_}$ = 3V, R_L = 100Ω, C_L = 35pF, Figure 2	T_A = +25°C		10	18	ns
			T_A = T_{MIN} to T_{MAX}			20	

ELECTRICAL CHARACTERISTICS—Single +5V Supply (continued)

(V+ = +4.5V to +5.5V, V_{IH} = 2.4V, V_{IL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values at T_A = +25°C.) (Notes 2, 9)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Turn-Off Time (Note 5)	t_{OFF}	$V_{NO_}$ or $V_{NC_}$ = 3V, R_L = 100Ω, C_L = 35pF, Figure 2	T_A = +25°C		4	6	ns
			T_A = T_{MIN} to T_{MAX}			8	
Break-Before-Make (Note 5)	t_{BBM}	$V_{NO_}$ or $V_{NC_}$ = 3V, R_L = 100Ω, C_L = 35pF, Figure 3	T_A = +25°C		5		ns
			T_A = T_{MIN} to T_{MAX}	1			
Charge Injection	Q	V_{GEN} = 4V, R_{GEN} = 0, C_L = 1.0nF, Figure 4			10		pC
Off-Isolation (Note 6)	V_{ISO}	C_L = 5pF, R_L = 100Ω, f = 10MHz, Figure 5	f = 10MHz		-47		dB
			f = 1MHz		-67		
Crosstalk (Note 7)	V_{CT}	C_L = 5pF, R_L = 100Ω, f = 10MHz, Figure 5	f = 10MHz		-68		dB
			f = 1MHz		-114		
Total Harmonic Distortion	THD	R_L = 600Ω, f = 20Hz to 20kHz			0.015		%
NO_, NC_ Off-Capacitance	$C_{NO_(OFF)}$, $C_{NC_(OFF)}$	$V_{NO_}$, $V_{NC_}$ = GND, f = 1MHz, Figure 6			10		pF
COM_ Off-Capacitance	$C_{COM_(OFF)}$	$V_{COM_}$ = GND, f = 1MHz, Figure 6			20		pF
COM_ On-Capacitance	$C_{(ON)}$	$V_{COM_}$ = $V_{NO_}$, $V_{NC_}$ = GND, f = 1MHz, Figure 6			30		pF
SUPPLY							
Supply Range	V+			1.8		5.5	V
Positive Supply Current	I+	V+ = +5.5V, V_{IN} = 0 or V+			0.001	1.0	µA

ELECTRICAL CHARACTERISTICS—Single +3V Supply

(V+ = +2.7V to +3.3V, V_{IH} = 2.0V, V_{IL} = 0.4V, T_A =T_{MIN} to T_{MAX}, unless otherwise noted. Typical values at T_A = +25°C.) (Notes 2, 9)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	V_{COM}, V_{NO}, $V_{NC_}$			0		V+	V
On-Resistance	R_{ON}	V+ = 2.7V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		4	6	Ω
			T_A = T_{MIN} to T_{MAX}			8	
On-Resistance Match Between Channels (Notes 3, 8)	ΔR_{ON}	V+ = 2.7V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		0.15	0.4	Ω
			T_A = T_{MIN} to T_{MAX}			0.5	
On-Resistance Flatness (Note 4)	$R_{FLAT(ON)}$	V+ = 2.7V, $I_{COM_}$ = 10mA, $V_{NO_}$ or $V_{NC_}$ = 0 to V+	T_A = +25°C		2	3	Ω
			T_A = T_{MIN} to T_{MAX}			4	
NO_, NC_ Off-Leakage Current (Note 5)	$I_{NO_(OFF)}$, $I_{NC_(OFF)}$	V+ = 3.3V; $V_{COM_}$ = 1V, 3V; $V_{NO_}$ or $V_{NC_}$ = 3V, 1V	T_A = +25°C	-0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

ELECTRICAL CHARACTERISTICS—Single +3V Supply (continued)

(V+ = +2.7V to +3.3V, V_{IH} = 2.0V, V_{IL} = 0.4V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values at T_A = +25°C.) (Notes 2, 9)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
COM_ Off-Leakage Current (Note 5)	$I_{COM_(OFF)}$	V+ = 3.3V; $V_{COM_}$ = 1V, 3V; $V_{NO_}$ or $V_{NC_}$ = 3V, 1V	T_A = +25°C	-0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	
COM_ On-Leakage Current (Note 5)	$I_{COM_(ON)}$	V+ = 3.3V; $V_{COM_}$ = 1V, 3V; $V_{NO_}$ or $V_{NC_}$ = 1V, 3V, or floating	T_A = +25°C	-0.5	±0.01	0.5	nA
			T_A = T_{MIN} to T_{MAX}	-1		1	
DIGITAL I/O (A0, $\overline{EN}$)							
Input Logic High	V_{IH}			2.0			V
Input Logic Low	V_{IL}					0.4	V
Input Leakage Current	I_{IN}	V_{IN} = 0 or +5.5V		-0.5	1	0.5	µA
DYNAMIC							
Turn-On Time (Note 5)	t_{ON}	$V_{NO_}$ or $V_{NC_}$ = 1.5V, R_L = 100Ω, C_L = 35pF, Figure 2	T_A = +25°C		12	22	ns
			T_A = T_{MIN} to T_{MAX}			25	
Turn-Off Time (Note 5)	t_{OFF}	$V_{NO_}$ or $V_{NC_}$ = 1.5V, R_L = 100Ω, C_L = 35pF, Figure 2	T_A = +25°C		5	8	ns
			T_A = T_{MIN} to T_{MAX}			10	
Break-Before-Make (Note 5)	t_{BBM}	$V_{NO_}$ or V_{NC} = 1.5V, R_L = 100Ω, C_L = 35pF, Figure 3	T_A = +25°C		5		ns
			T_A = T_{MIN} to T_{MAX}	1			
Charge Injection	Q	V_{GEN} = 2V, R_{GEN} = 0, C_L = 1.0nF, Figure 4			18		pC
Off-Isolation (Note 6)	V_{ISO}	C_L = 5pF, R_L = 100Ω, f = 10MHz, Figure 5	f = 10MHz		-47		dB
			f = 1MHz		-67		
Crosstalk (Note 7)	V_{CT}	C_L = 5pF, R_L = 100Ω, f = 10MHz, Figure 5	f = 10MHz		-68		dB
			f = 1MHz		-114		
NO_, NC_ Off-Capacitance	$C_{NO_(OFF)}$, $C_{NC_(OFF)}$	$V_{NO_}$ or $V_{NC_}$ = GND, f = 1MHz, Figure 6			10		pF
COM_ Off-Capacitance	$C_{COM_(OFF)}$	$V_{COM_}$ = GND, f = 1MHz, Figure 6			20		pF
COM_ On-Capacitance	$C_{(ON)}$	$V_{COM_}$ = $V_{NO_}$, $V_{NC_}$ = GND, f = 1MHz, Figure 6			30		pF
SUPPLY							
Positive Supply Current	I+	V+ = 3.3V, V_{IN} = 0 or V+			0.001	1.0	µA


Note 2: The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.
Note 3: ΔR_{ON} = $R_{ON(MAX)}$ - $R_{ON(MIN)}$.
Note 4: Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.
Note 5: Guaranteed by design.
Note 6: Off-Isolation = $20\log_{10}$ (V_{COM}/V_{NO}), V_{COM} = output, V_{NO} = input to off switch.
Note 7: Between any two switches.
Note 8: ΔR_{ON} matching specifications for QFN packaged parts are guaranteed by design.
Note 9: Parts are tested at the maximum hot-rated temperature. Limits across the entire temperature range are guaranteed by design and correlation.

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer


Typical Operating Characteristics

(V+ = +5V, T_A = +25°C, unless otherwise noted.)


ON-RESISTANCE vs. V_{COM}

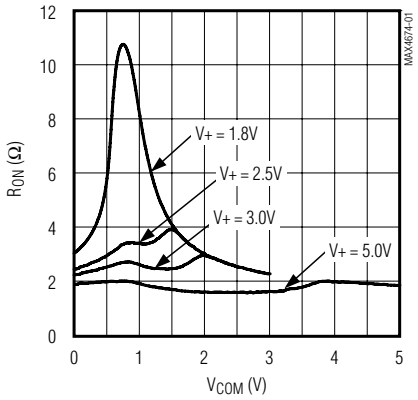


ON-RESISTANCE vs. V_{COM}

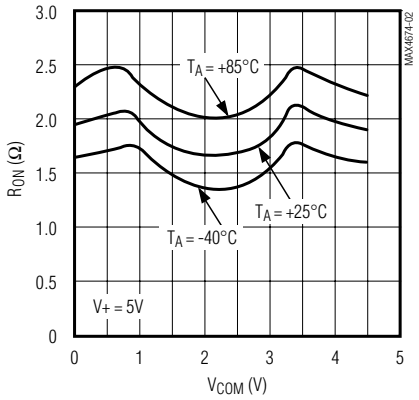


ON/OFF-LEAKAGE CURRENT vs. TEMPERATURE

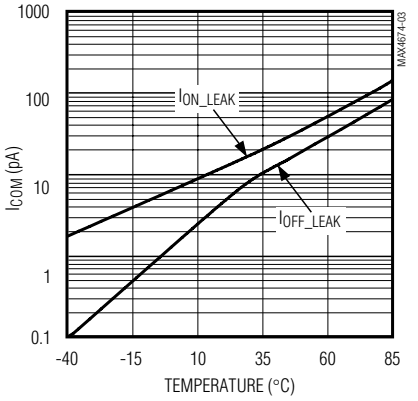


CHARGE INJECTION vs. V_{COM}

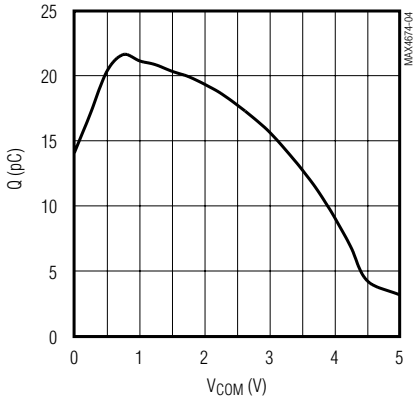


SUPPLY CURRENT vs. SUPPLY VOLTAGE

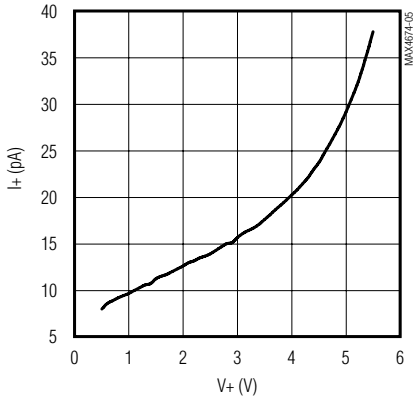


TURN-ON/-OFF TIME vs. SUPPLY VOLTAGE

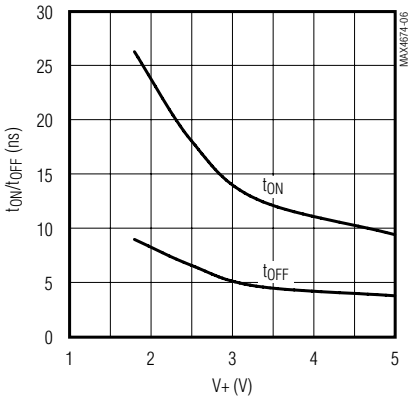


TURN-ON/-OFF TIME vs. TEMPERATURE

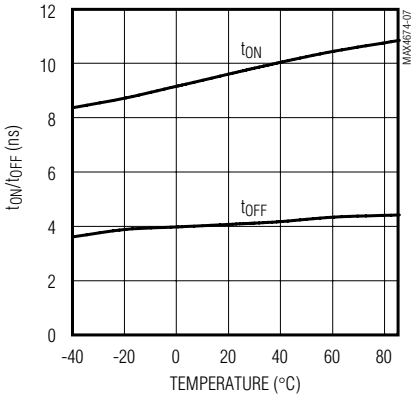

OFF-ISOLATION, ON-RESPONSE, AND CROSSTALK vs. FREQUENCY

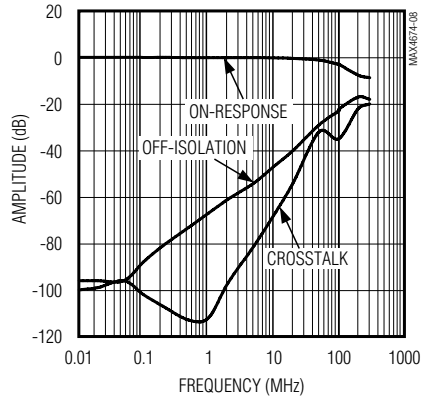

TOTAL HARMONIC DISTORTION vs. FREQUENCY

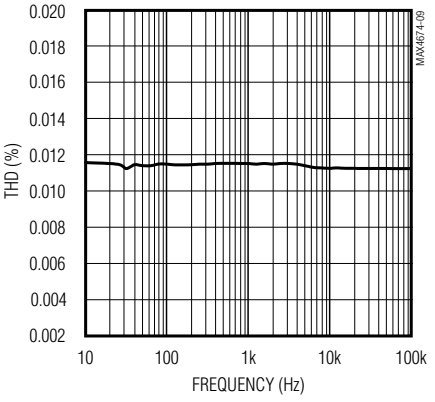

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

Pin Description

PIN			NAME	FUNCTION
QSOP/TSSOP/SO	20 QFN	16 QFN		
1	20	15	A0	Address Input
2	1	16	NC1	Normally Closed Terminal
3	2	1	NO1	Normally Open Terminal
4	3	2	COM1	Analog Switch Common Terminal
5	4	3	NC2	Normally Closed Terminal
6	5	4	NO2	Normally Open Terminal
7	6	5	COM2	Analog Switch Common Terminal
—	7, 9, 17, 19	—	N.C.	No Connection
8	8	6	GND	Ground
9	10	7	COM3	Analog Switch Common Terminal
10	11	8	NO3	Normally Open Terminal
11	12	9	NC3	Normally Closed Terminal
12	13	10	COM4	Analog Switch Common Terminal
13	14	11	NO4	Normally Open Terminal
14	15	12	NC4	Normally Closed Terminal
15	16	13	$\overline{EN}$	Output Enable, Active Low
16	18	14	V+	Positive Supply Voltage

Detailed Description

The MAX4674 is a low on-resistance (R_{ON}), low-voltage, quad 2:1 analog multiplexer/demultiplexer that operates from a +1.8V to +5.5V single supply. The MAX4674 features very fast switching speed (t_{ON} = 18ns max, t_{OFF} = 6ns max) and guaranteed break-before-make switching. Its low R_{ON} allows high continuous currents to be switched in a variety of applications.

Digital Interface

A0 and $\overline{EN}$ are CMOS digital inputs that meet TTL logic levels when V+ = 5V. Note that A0 and $\overline{EN}$ can exceed the voltage at V+ to a maximum of +5.5V. This feature allows operation of the MAX4674 from a +3.3V supply while controlling it with 5V CMOS logic signals.

The *Pin Configuration/Functional Diagram/Truth Table* located on the first page of this data sheet details the operation of the MAX4674.

Applications Information

Power-Supply Considerations

Overview

The MAX4674 construction is typical of most CMOS analog switches. It has two supply pins, V+ and GND, used to drive the internal CMOS switches and set the limits of the analog voltage on any switches. Reverse ESD-protection diodes are internally connected between each analog-signal pin and both V+ and GND. If any analog signal exceeds V+ and GND, one of these diodes conducts. During normal operation, these and other reverse-biased ESD diodes leak, forming the only current drawn from V_{CC} or GND.

Virtually all the analog leakage current comes from the ESD diodes. Although the ESD diodes on a given signal pin are identical and therefore fairly well balanced, they are reverse biased differently. Each is biased by either V+ or GND and the analog signal. This means their leakages will vary as the signal varies. The difference in the two-diode leakages to the V+ and GND pins constitutes the analog-signal-path leakage current. All analog leakage current flows between each pin and one of the supply terminals, not to the other switch terminal, which is why both sides of a given switch can show leakage currents of either the same or opposite polarity.

V+ and GND power the internal logic and set the input logic limits. Logic inputs have ESD-protection diodes to ground.

The logic-level thresholds are TTL/CMOS compatible when V+ is +5V. As V+ rises, the threshold increases; as V+ falls, the threshold decreases. For example,

when V+ = +3V, the guaranteed minimum logic-high threshold decreases to 2.0V.

Low-Voltage Operation

The MAX4674 operates from a single supply between +1.8V and +5.5V. At room temperature, it actually "works" with a single supply near or below +1.7V; as supply voltage decreases, however, switch on-resistance becomes very high.

Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the device. Always sequence V+ on first, followed by the logic inputs and analog signals. If power-supply sequencing is not possible, add two small signal diodes (D1, D2) in series with the supply pins for overvoltage protection (Figure 1).

Adding diodes reduces the analog-signal range to one diode drop below V+ and one diode drop above GND, but does not affect the device's low switch resistance and low leakage characteristics. Device operation is unchanged, and the difference between V+ and GND should not exceed 6V. These protection diodes are not recommended if signal levels must extend to ground.

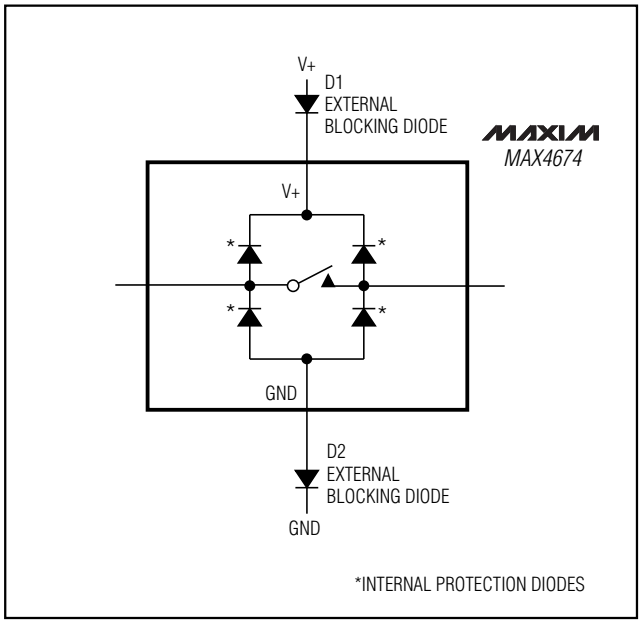


Figure 1. Overvoltage Protection Using External Blocking Diodes

High-Frequency Performance

In 50Ω systems, signal response is reasonably flat up to 50MHz (see *Typical Operating Characteristics*). Above 20MHz, the on response has several minor peaks that are highly layout dependent. The problem is not turning the switch on, but turning it off. The off-state switch acts like a capacitor and passes higher frequencies with less attenuation. At 10MHz, off-isolation is about -50dB in 50Ω systems, becoming worse (approximately 20dB per decade) as frequency increases. Higher circuit impedances also degrade off-isolation. Adjacent channel attenuation is about 3dB above that of a bare IC socket and is entirely due to capacitive coupling.

Chip Information

TRANSISTOR COUNT: 478

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

Test Circuits/Timing Diagrams

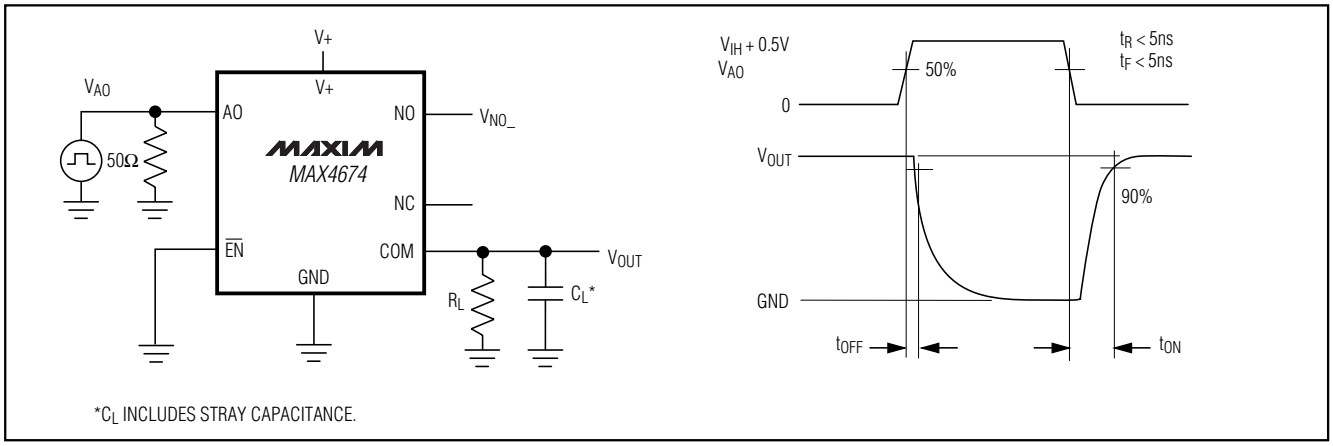


Figure 2. Turn-On and Turn-Off Times

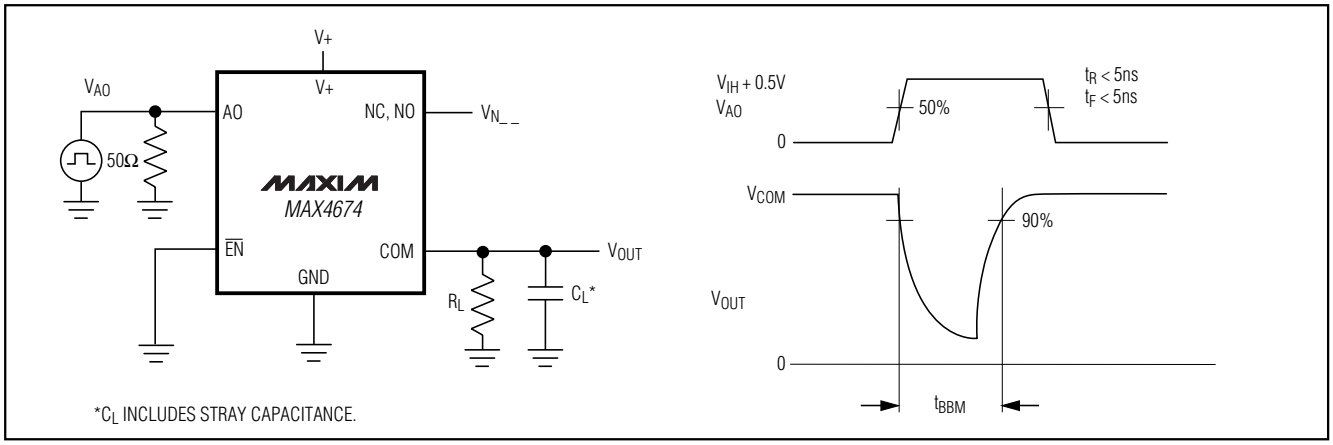


Figure 3. Break-Before-Make Interval


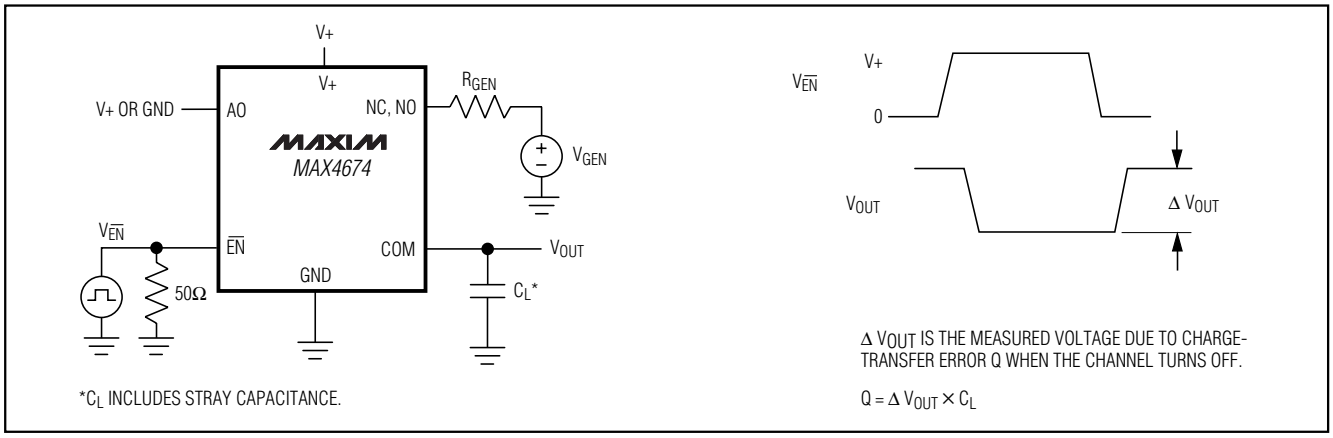


Figure 4. Charge Injection

Test Circuits/Timing Diagrams (continued)

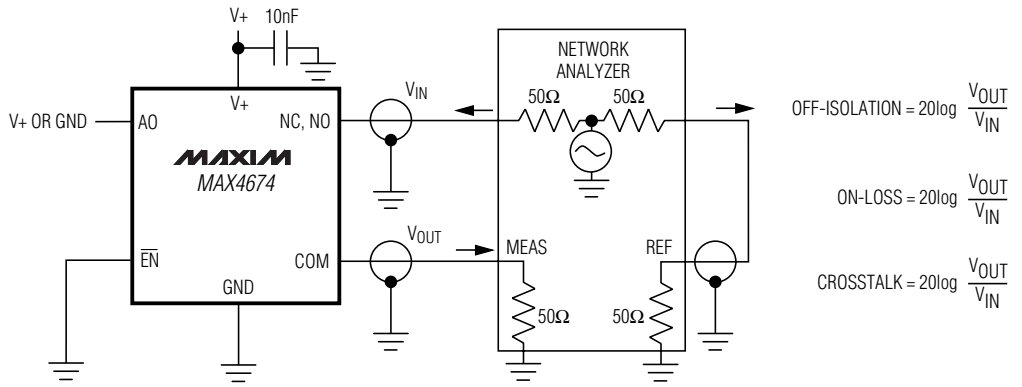

NOTES: MEASUREMENTS ARE STANDARDIZED AGAINST SHORTS AT SOCKET TERMINALS.
OFF-ISOLATION IS MEASURED BETWEEN COM AND "OFF" NO TERMINAL ON EACH SWITCH.
ON-LOSS IS MEASURED BETWEEN COM AND "ON" NO TERMINAL ON EACH SWITCH.
CROSSTALK IS MEASURED FROM ONE CHANNEL TO ALL OTHER CHANNELS.
SIGNAL DIRECTION THROUGH SWITCH IS REVERSED; WORST VALUES ARE RECORDED.

Figure 5. Off-Isolation, On-Loss, and Crosstalk


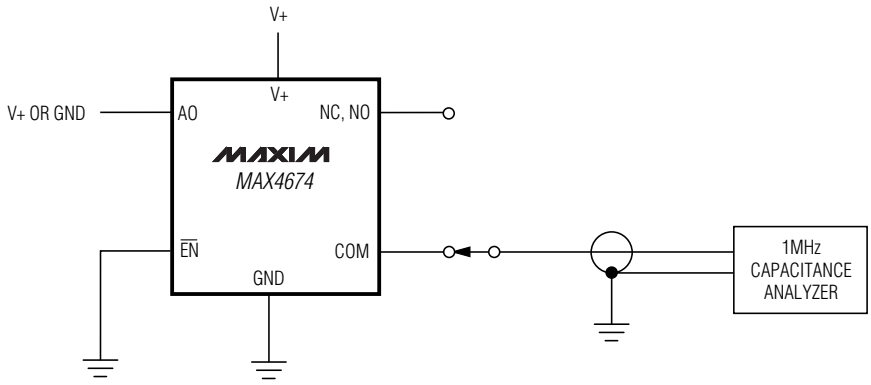


Figure 6. Capacitance

3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

Package Information

QSOP.EPS

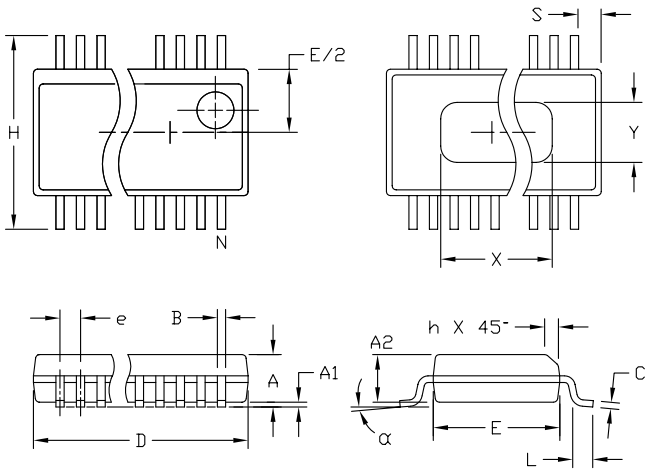

DIM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.061	.068	1.55	1.73
A1	.004	.0098	0.102	0.249
A2	.055	.061	1.40	1.55
B	.008	.012	0.20	0.31
C	.0075	.0098	0.191	0.249
D	SEE VARIATIONS			
E	.150	.157	3.81	3.99
e	.025 BSC		0.635 BSC	
H	.230	.244	5.84	6.20
h	.010	.016	0.25	0.41
L	.016	.035	0.41	0.89
N	SEE VARIATIONS			
X	SEE VARIATIONS			
Y	.071	.087	1.803	2.209
α	0°	8°	0°	8°


VARIATIONS:

	INCHES MIN.	INCHES MAX.	MILLIMETERS MIN.	MILLIMETERS MAX.	N	
D	.189	.196	4.80	4.98	16	AA
S	.0020	.0070	0.05	0.18		
X	.107	.123	2.72	3.12		
D	.337	.344	8.56	8.74	20	AB
S	.0500	.0550	1.270	1.397		
D	.337	.344	8.56	8.74	24	AC
S	.0250	.0300	0.635	0.762		
D	.386	.393	9.80	9.98	28	AD
S	.0250	.0300	0.635	0.762		
X	.271	.287	6.88	7.29		

NOTES:
1. D & E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .006" PER SIDE.
3. HEAT SLUG DIMENSIONS X AND Y APPLY ONLY TO 16 AND 28 LEAD POWER-QSOP PACKAGES.
4. CONTROLLING DIMENSIONS: INCHES.
5. MEETS JEDEC MO137.


MAXIM
PROPRIETARY INFORMATION
TITLE:
PACKAGE OUTLINE, QSOP, .150", .025" LEAD PITCH
APPROVAL | DOCUMENT CONTROL NO. 21-0055 | REV C | 1/1

TSSOP.EPS

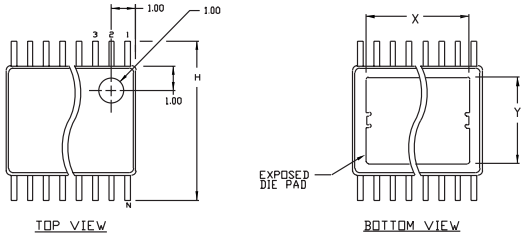


TOP VIEW

BOTTOM VIEW

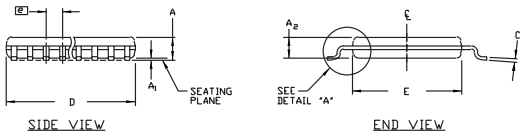

SIDE VIEW

END VIEW



SYMBOL	COMMON DIMENSIONS MILLIMETERS MIN.	MILLIMETERS MAX.	INCHES MIN.	INCHES MAX.
A	—	1.10		.043
A_1	0.05	0.15	.002	.006
A_2	0.85	0.95	.033	.037
b	0.19	0.30	.007	.012
b1	0.19	0.25	.007	.010
c	0.090	0.20	.0035	.008
c1	0.090	0.135	.0035	.0053
D	SEE VARIATIONS		SEE VARIATIONS	
E	4.30	4.50	.169	.177
e	0.65 BSC		.026 BSC	
H	6.25	6.50	.246	.256
L	0.50	0.70	.020	.028
N	SEE VARIATIONS		SEE VARIATIONS	
Y	2.85	3.15	.112	.124
α	0°	8°	0°	8°


JEDEC MO-153	N		VARIATIONS MILLIMETERS MIN.	MILLIMETERS MAX.	INCHES MIN.	INCHES MAX.
AB	14	D	4.90	5.10	.193	.201
AC	16	D	4.90	5.10	.193	.201
AC-EP	16	D	4.90	5.10	.193	.201
		X	2.85	3.15	.112	.124
AD	20	D	6.40	6.60	.252	.260
AD-EP	20	D	6.40	6.60	.252	.260
		X	4.00	4.34	.157	.171
AE	24	D	7.70	7.90	.303	.311
AF	28	D	9.60	9.80	.378	.386
AF-EP		D	9.60	9.80	.378	.386
		X	5.35	5.65	.211	.222

NOTES:
1. DIMENSIONS D AND E DO NOT INCLUDE FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15 mm PER SIDE.
3. CONTROLLING DIMENSION: MILLIMETER.
4. MEETS JEDEC OUTLINE MO-153 VARIATIONS AB, AC, AD, AE, AF.
5. DIMENSIONS X AND Y APPLY TO EXPOSED PAD (EP) VERSIONS ONLY.
6. EXPOSED PAD FLUSH WITH BOTTOM OF PACKAGE WITHIN .002".

MAXIM
PROPRIETARY INFORMATION
TITLE:
PACKAGE OUTLINE, TSSOP, 4.40mm BODY, 0.65mm PITCH
APPROVAL | DOCUMENT CONTROL NO. 21-0066 | REV C | 1/1

Package Information (continued)

SOICN.EPS

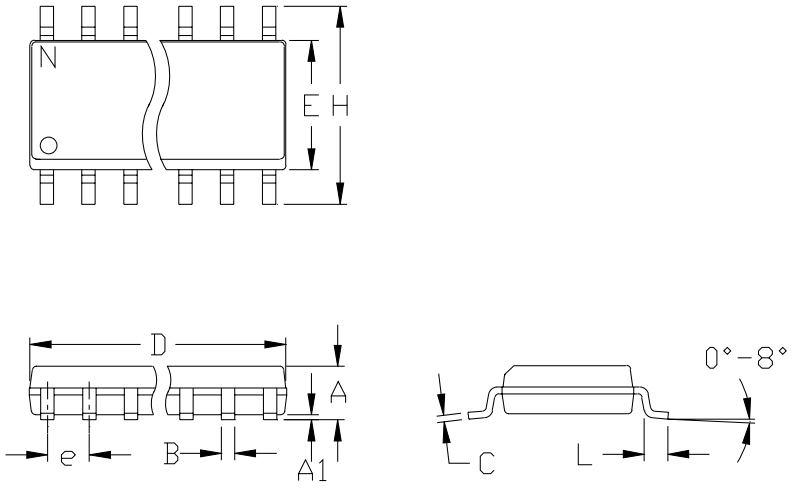

	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
e	0.050		1.27	
E	0.150	0.157	3.80	4.00
H	0.228	0.244	5.80	6.20
h	0.010	0.020	0.25	0.50
L	0.016	0.050	0.40	1.27


	INCHES		MILLIMETERS			
	MIN	MAX	MIN	MAX	N	MS012
D	0.189	0.197	4.80	5.00	8	A
D	0.337	0.344	8.55	8.75	14	B
D	0.386	0.394	9.80	10.00	16	C

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. LEADS TO BE COPLANAR WITHIN .102mm (.004")
4. CONTROLLING DIMENSION: MILLIMETER
5. MEETS JEDEC MS012-XX AS SHOWN IN ABOVE TABLE
6. N = NUMBER OF PINS

MAXIM	PACKAGE FAMILY OUTLINE: SOIC .150"	1/1	21-0041 A
120 SAN GABRIEL DR SUNNYVALE CA 94086 FAX (408) 737 7194 PROPRIETARY INFORMATION	TITLE		DOCUMENT CONTROL NUMBER REV


3V/5V, 4Ω, Wideband Quad 2:1 Analog Multiplexer

Package Information (continued)

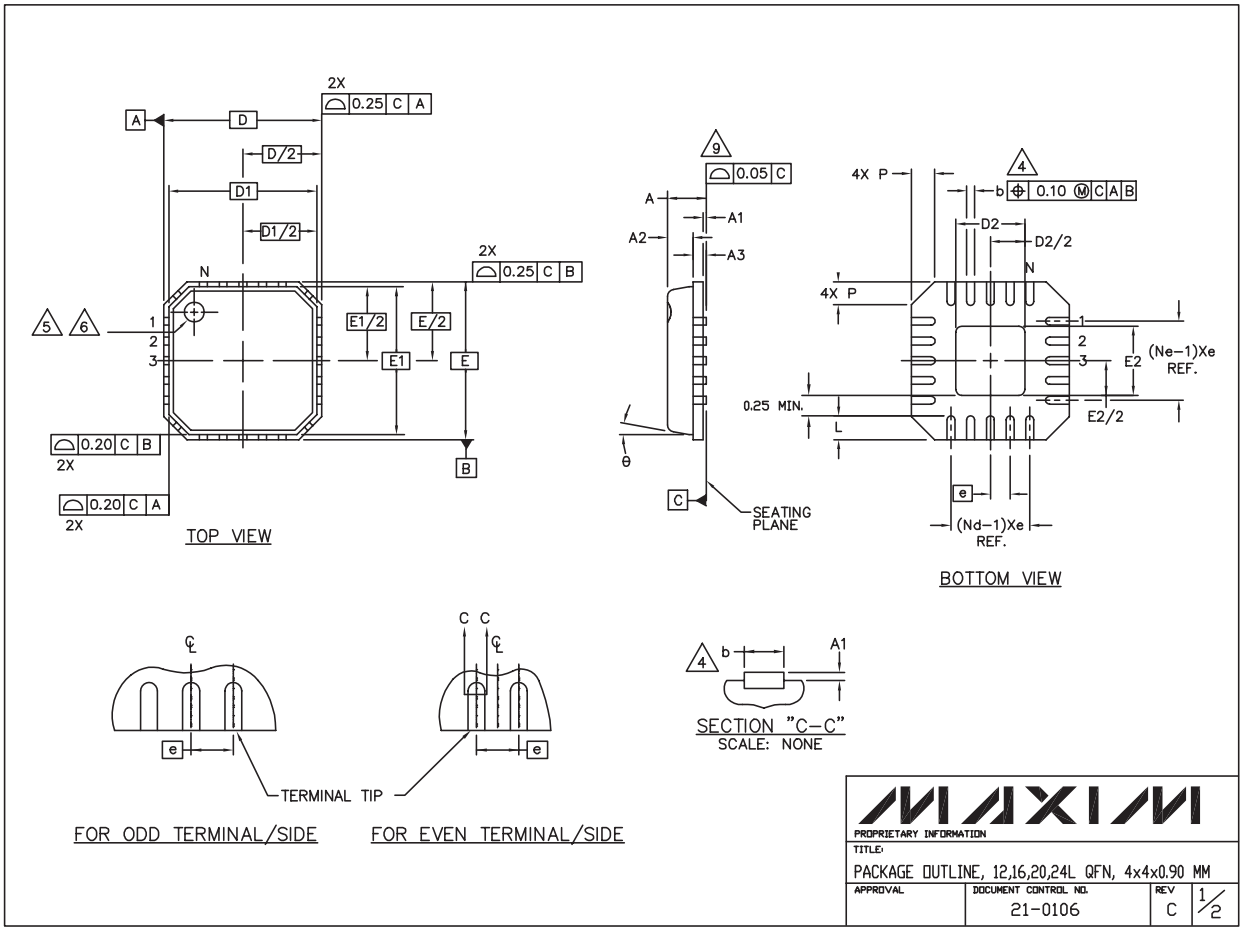

Package Information (continued)

12,16,20, 24L QFN.EPS

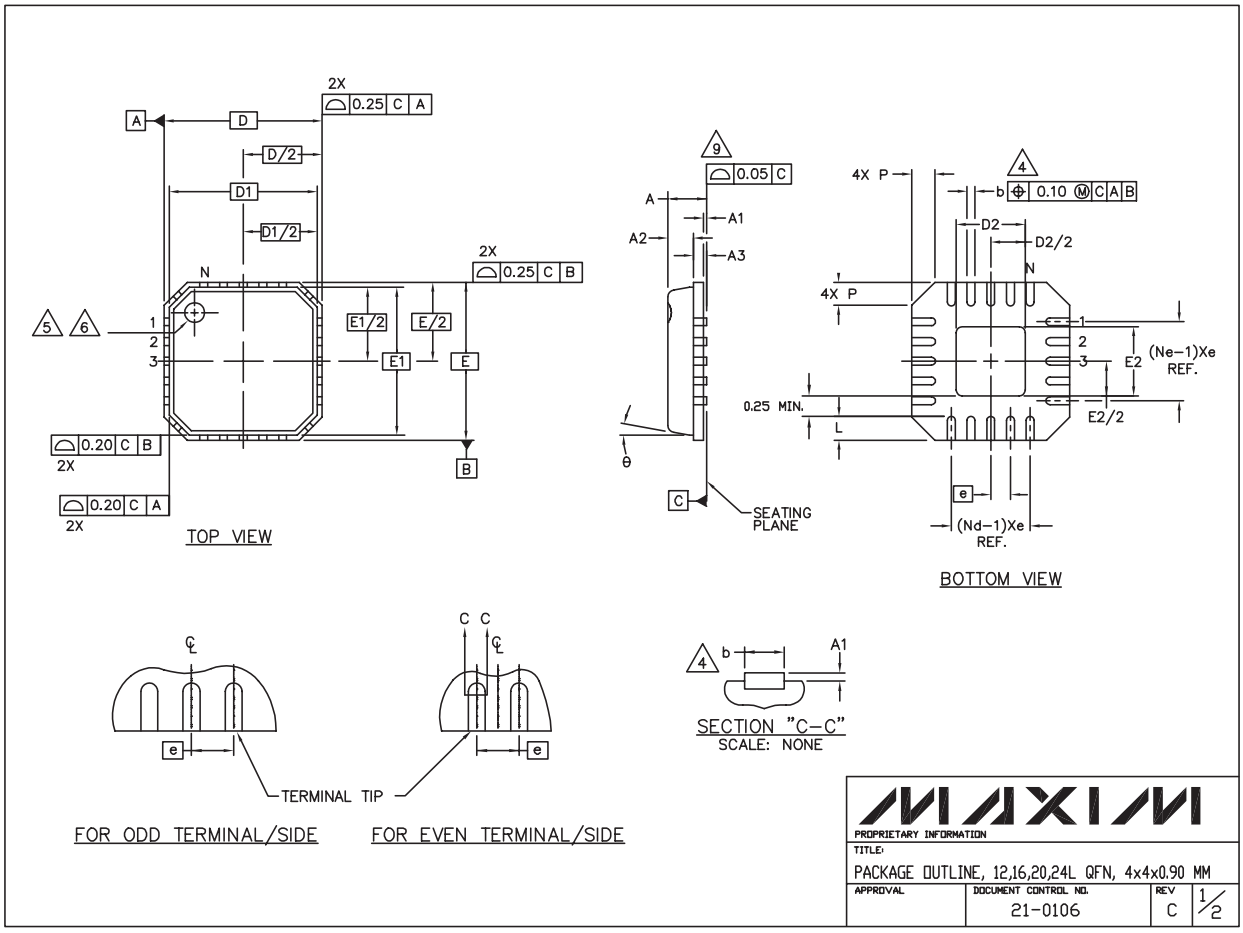

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2002 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.