





0283 SERIES

The 283 filter is a compact, single phase, high current device with very good common mode and differential mode insertion loss. It is very useful in power control systems where the ground coil will help eliminate system ground loop noise.

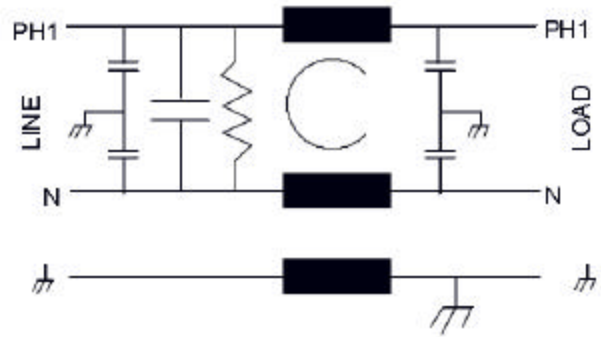

Operating voltage = 115/250 Vac
 Operating current = 20, 30 Amp
 Operating frequency = 50/60Hz
 Operating temperature = -20o to 50o C
 Diel. withstanding (line - case) = 1500 Vac
 Diel. withstanding (line - line) = 1500 Vdc
 Leakage current = 1.5 ma at 250 Vac, 60 Hz
 Max residual voltage after 1 sec. = 30 Volts
 Agency approvals = UL -- E60380
 CSA -- LR50822-3, -135, -136
 VDE -- 12819-4730-1014 A1G

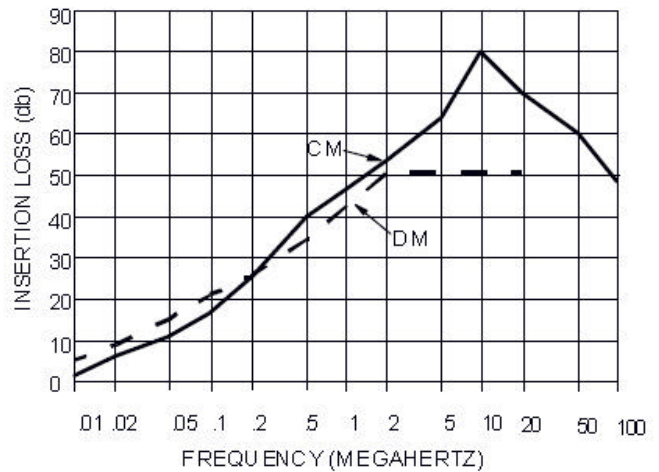

Ordering Information

20 AMPS KK-0283-20
 KK-0283-20M (METRIC)
 30 AMPS KK-0283-30
 KK-0283-30M (METRIC)

