




PCB Connectors

GSK 720 V/10

Terminal Block Vertical, Pin Spacing: 3.5 mm, 10 pole, Insulating Material: PBT, Voltage Rating: 130 V, Current Rating: 13.5 A, Cross-Section: 1.0 mm²

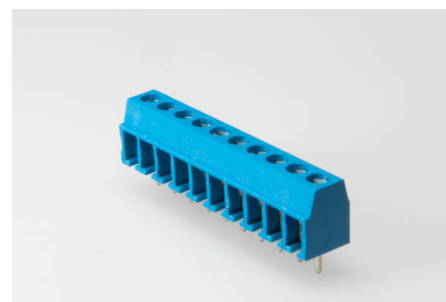

Order Info

Reference Number (ref. no.)	314010
Applications	Lighting, Electrical Appliances, Electronics
PU	250

Type

Type	Terminal Block Vertical
Number of poles	10 pole
Clamping Units per Pole	1
Colour	blue
Cross-Section	1.0 mm ²
Connection Type	Screw

Technical Data

Voltage Rating	130 V
Current Rating	13.5 A
Insulating Material	PBT
Contact Material	Brass
Core Cross-Section min.	0.5 mm ²
Core Cross-Section max.	1.5 mm ²
Flammability Rating	V-0
max. Ambient Temperature Operation	85 °C
Type of Conductor Solid	yes
Type of Conductor Flexible	yes
Type of Conductor Stranded	yes
Stripping Length	4.0-4.5 mm
Assembly Contact Screw	0.4x2.5 / ⌀ 0.2 Nm
Pin Spacing	3.5 mm
Approbation EN60998	GSK720_EN60998_20070920_VDE_40022168_web.pdf
Approbation UL	GSK720_19940608_19941222_UL_E63492_1-12_Description_web.p
Approbation CSA	GSK_GST_Printklemmen_Serie_20160404_CSA_70070893_Certificat