

SURFACE MOUNT UNIDIRECTIONAL AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS


REVERSE VOLTAGE - 5.0 to 440 Volts
POWER DISSIPATION - 600 Watts

FEATURES

- Rating to 440V VBR
- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL recognition 94V-0
- Typical IR less than 1 μ A above 10V
- Fast response time: typically less than 1.0ns for Uni-direction, less than 5.0ns for Bi-direction, from 0 Volts to BV min

MECHANICAL DATA

- Case : Molded Plastic
- Polarity: by cathode band denotes uni-directional device
none cathode band denotes bi-directional device
- Weight : 0.003 ounces, 0.093 grams

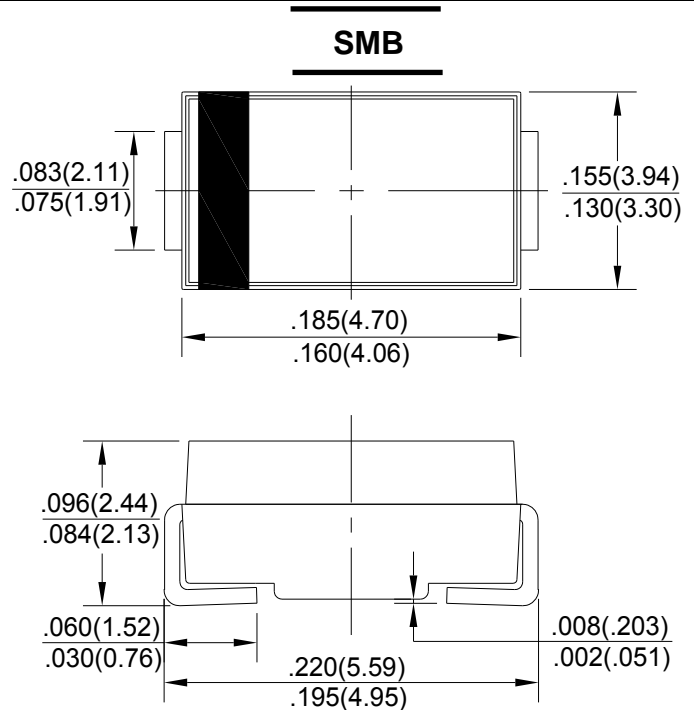

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Peak Power Dissipation at $T_A=25^{\circ}\text{C}$ by $10 \times 1000\mu\text{s}$ waveform (Note1,2)	P_{PPM}	600	W
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	100	A
Steady State Power Dissipation at $T_L=75^{\circ}\text{C}$	$P_{M(AV)}$	5.0	W
Maximum Instantaneous Forward Voltage at 50A for Unidirectional Devices Only (Note3)	V_F	3.5/5	V
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	20	$^{\circ}\text{C}/\text{W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100	$^{\circ}\text{C}/\text{W}$
Typical Junction Capacitance (Note4)	C_J	2000	pF
Operating Temperature Range	T_J	-55 to + 150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to + 150	$^{\circ}\text{C}$

NOTES:1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^{\circ}\text{C}$ per Fig. 1.

2. Thermal Resistance junction to Lead.

3. $V_F < 3.5\text{V}$ for $V_{BR} \leq 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} \geq 201\text{V}$

4. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

5. The typical data above is for reference only (典型值仅供参考).

FIG.1-PULSE DERATING CURVE

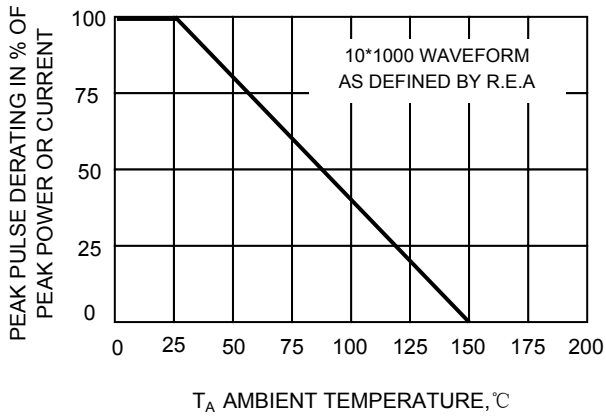


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

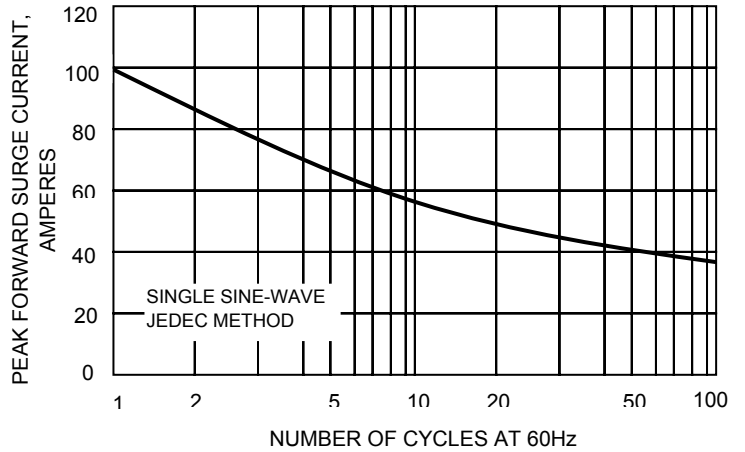


FIG.3-PULSE WAVEFORM

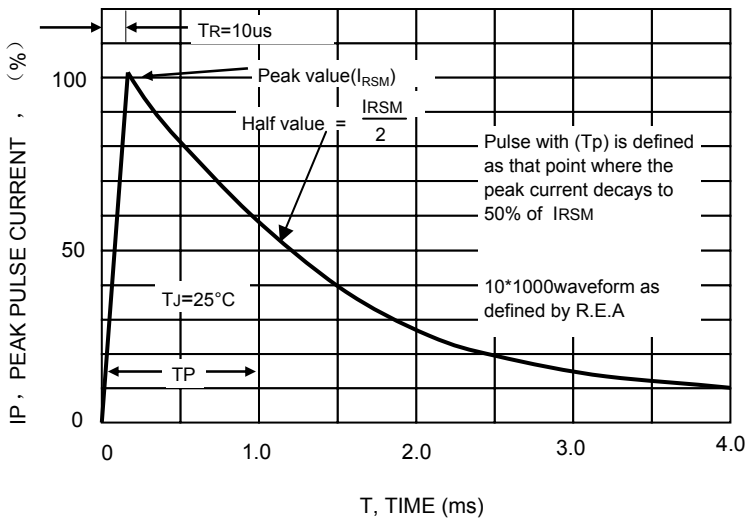


FIG.4-TYPICAL JUNCTION CAPACITANCE

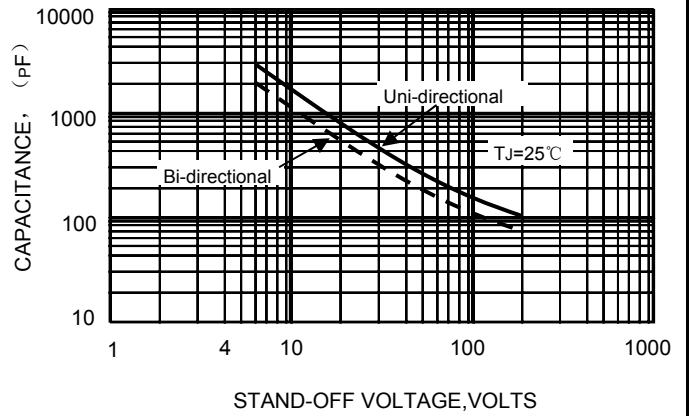


FIG.5-PULSE RATING CURVE


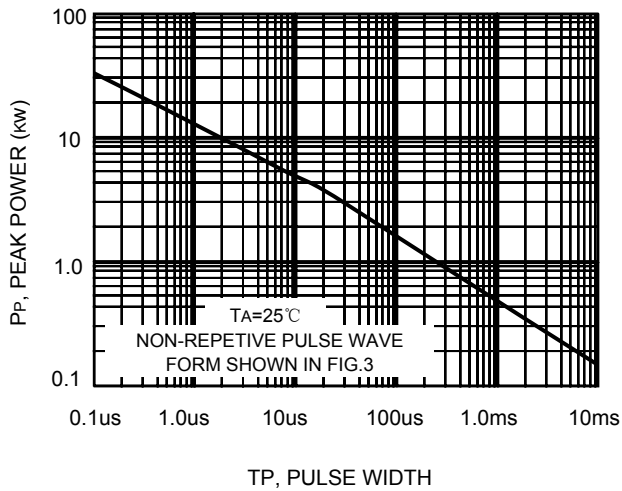


FIG.6-STEADY STATE POWER DERATING CURVE



The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

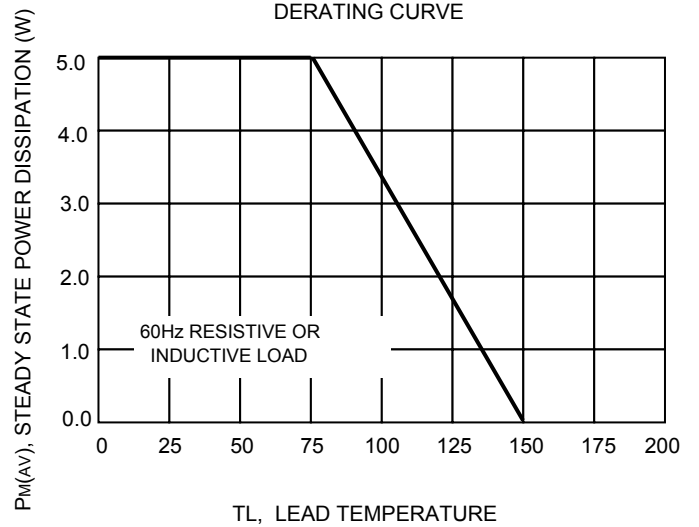

SMBJ SERIES

Part Number		Marking		Reverse Stand off Voltage	Breakdown Voltage VBR (Volts) _{@I_T}		Test Current I _T	Maximum Clamping Voltage VC _{@I_{PP}}	Maximum Reak Pulse Current	Maximum Reverse Leakage at VR
UNI	BI	UNI	BI	VR (V)	Min(V)	Max(V)	@ I _T (mA)	Vc (V)	IPP (A)	IR (μA)
SMBJ5.0A	SMBJ5.0CA	KE	AE	5.0	6.40	7.00	10	9.2	65.3	800
SMBJ6.0A	SMBJ6.0CA	KG	AG	6.0	6.67	7.37	10	10.3	58.3	800
SMBJ6.5A	SMBJ6.5CA	KK	AK	6.5	7.22	7.98	10	11.2	53.6	500
SMBJ7.0A	SMBJ7.0CA	KM	AM	7.0	7.78	8.60	10	12.0	50.0	200
SMBJ7.5A	SMBJ7.5CA	KP	AP	7.5	8.33	9.21	1.0	12.9	46.6	100
SMBJ8.0A	SMBJ8.0CA	KR	AR	8.0	8.89	9.83	1.0	13.6	44.2	50
SMBJ8.5A	SMBJ8.5CA	KT	AT	8.5	9.44	10.40	1.0	14.4	41.7	20
SMBJ9.0A	SMBJ9.0CA	KV	AV	9.0	10.00	11.10	1.0	15.4	39.0	10
SMBJ10A	SMBJ10CA	KX	AX	10.0	11.10	12.30	1.0	17.0	35.3	5.0
SMBJ11A	SMBJ11CA	KZ	AZ	11.0	12.20	13.50	1.0	18.2	33.0	1.0
SMBJ12A	SMBJ12CA	LE	BE	12.0	13.30	14.70	1.0	19.9	30.2	1.0
SMBJ13A	SMBJ13CA	LG	BG	13.0	14.40	15.90	1.0	21.5	28.0	1.0
SMBJ14A	SMBJ14CA	LK	BK	14.0	15.60	17.20	1.0	23.2	25.9	1.0
SMBJ15A	SMBJ15CA	LM	BM	15.0	16.70	18.50	1.0	24.4	24.6	1.0
SMBJ16A	SMBJ16CA	LP	BP	16.0	17.80	19.70	1.0	26.0	23.1	1.0
SMBJ17A	SMBJ17CA	LR	BR	17.0	18.90	20.90	1.0	27.6	21.8	1.0
SMBJ18A	SMBJ18CA	LT	BT	18.0	20.00	22.10	1.0	29.2	20.6	1.0
SMBJ20A	SMBJ20CA	LV	BV	20.0	22.20	24.50	1.0	32.4	18.6	1.0
SMBJ22A	SMBJ22CA	LX	BX	22.0	24.40	26.90	1.0	35.5	16.9	1.0
SMBJ24A	SMBJ24CA	LZ	BZ	24.0	26.70	29.50	1.0	38.9	15.5	1.0
SMBJ26A	SMBJ26CA	ME	CE	26.0	28.90	31.90	1.0	42.1	14.3	1.0
SMBJ28A	SMBJ28CA	MG	CG	28.0	31.10	34.40	1.0	45.4	13.3	1.0
SMBJ30A	SMBJ30CA	MK	CK	30.0	33.30	36.80	1.0	48.4	12.4	1.0
SMBJ33A	SMBJ33CA	MM	CM	33.0	36.70	40.60	1.0	53.3	11.3	1.0
SMBJ36A	SMBJ36CA	MP	CP	36.0	40.00	44.20	1.0	58.1	10.4	1.0
SMBJ40A	SMBJ40CA	MR	CR	40.0	44.40	49.10	1.0	64.5	9.3	1.0
SMBJ43A	SMBJ43CA	MT	CT	43.0	47.80	52.80	1.0	69.4	8.7	1.0
SMBJ45A	SMBJ45CA	MV	CV	45.0	50.00	55.30	1.0	72.7	8.3	1.0
SMBJ48A	SMBJ48CA	MX	CX	48.0	53.30	58.90	1.0	77.4	7.8	1.0
SMBJ51A	SMBJ51CA	MZ	CZ	51.0	56.70	62.70	1.0	82.4	7.3	1.0
SMBJ54A	SMBJ54CA	NE	DE	54.0	60.00	66.30	1.0	87.1	6.9	1.0
SMBJ58A	SMBJ58CA	NG	DG	58.0	64.40	71.20	1.0	93.6	6.5	1.0
SMBJ60A	SMBJ60CA	NK	DK	60.0	66.70	73.70	1.0	96.8	6.2	1.0
SMBJ64A	SMBJ64CA	NM	DM	64.0	71.10	78.60	1.0	103.0	5.9	1.0
SMBJ70A	SMBJ70CA	NP	DP	70.0	77.80	86.00	1.0	113.0	5.3	1.0
SMBJ75A	SMBJ75CA	NR	DR	75.0	83.30	92.10	1.0	121.0	5.0	1.0
SMBJ78A	SMBJ78CA	NT	DT	78.0	86.70	95.80	1.0	126.0	4.8	1.0
SMBJ85A	SMBJ85CA	NV	DV	85.0	94.40	104.00	1.0	137.0	4.4	1.0
SMBJ90A	SMBJ90CA	NX	DX	90.0	100.00	111.00	1.0	146.0	4.1	1.0
SMBJ100A	SMBJ100CA	NZ	DZ	100.0	111.00	123.00	1.0	162.0	3.7	1.0
SMBJ110A	SMBJ110CA	PE	EE	110.0	122.00	135.00	1.0	177.0	3.4	1.0
SMBJ120A	SMBJ120CA	PG	EG	120.0	133.00	147.00	1.0	193.0	3.1	1.0
SMBJ130A	SMBJ130CA	PK	EK	130.0	144.00	159.00	1.0	209.0	2.9	1.0
SMBJ150A	SMBJ150CA	PM	EM	150.0	167.00	185.00	1.0	243.0	2.5	1.0
SMBJ160A	SMBJ160CA	PP	EP	160.0	178.00	197.00	1.0	259.0	2.3	1.0
SMBJ170A	SMBJ170CA	PR	ER	170.0	189.00	209.00	1.0	275.0	2.2	1.0
SMBJ180A	SMBJ180CA	PT	ET	180.0	201.00	222.00	1.0	292.0	2.1	1.0
SMBJ200A	SMBJ200CA	PV	EV	200.0	224.00	247.00	1.0	324.0	1.9	1.0
SMBJ220A	SMBJ220CA	PX	EX	220.0	246.00	272.00	1.0	356.0	1.7	1.0
SMBJ250A	SMBJ250CA	PZ	EZ	250.0	279.00	309.00	1.0	405.0	1.5	1.0
SMBJ300A	SMBJ300CA	QE	FE	300.0	335.00	371.00	1.0	486.0	1.3	1.0
SMBJ350A	SMBJ350CA	QG	FG	350.0	391.00	432.00	1.0	567.0	1.1	1.0
SMBJ400A	SMBJ400CA	QK	FK	400.0	447.00	494.00	1.0	648.0	0.9	1.0
SMBJ440A	SMBJ440CA	QM	FM	440.0	492.00	543.00	1.0	713.0	0.9	1.0

Note: For bidirectional type having V_{RWM} of 10 volts and less, the IR limit is double.



Disclaimer

ALL specifications and data are subject to be changed without notice to improve reliability function or design or other reasons.

HY makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, HY disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on HY's knowledge of typical requirements that are often placed on HY products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify HY's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, HY products are not designed for use in medical, life-saving, or life-sustaining applications or for any other applications in which the failure of the HY product could result in personal injury or death. Customers using or selling HY products not expressly indicated for use in such applications do so at their own risk. Please contact authorized HY personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of HY. Product names and markings noted herein may be trademarks of their respective owners.

声明

所有的规格及数据如因改进可靠性、功能、设计或其他原因发生变更，恕不另行通知。

HY 对产品特定用途的适用性或任何产品的连续生产不做担保、陈述或保证。在可适用法律允许的最大程度上，HY 不承担 (i) 因应用或使用任何产品产生的任何及全部责任，(ii) 包括但不限于特定、连带或附带损害产生的任何及全部责任，(iii) 不做任何形式默认担保，包括不保证特定用途的使用性、非侵权及商业适销性。

关于产品适用于某类应用的声明以 HY 掌握的 HY 产品一般应用环境下的典型要求为准。此类声明与产品特定应用的适用性声明不存在任何关联。客户自行负责根据产品技术规格的说明认证特定产品是否适用于特定的应用。数据手册和技术规格中提供的参数可能因不同的应用而异，而且性能可能随时间而变化。所有工作参数，包括电型参数，必须有客户的技术专家根据每一个客户应用环境确认。产品技术规格不扩展或不以其他方式修改 HY 的采购条款与条件或不以其他方式修改 HY 的采购条款与条件，包括但不限于规定的质保条件。

除非书面注明，否则 HY 产品不用于医疗、救护或生命维护，或其他因 HY 产品发生故障有可能导致人身伤亡的应用场合。客户使用或销售未明确指示可在上诉应用中使用的 HY 产品风险自负。如欲获得有关指定用于上诉应用的产品的书面条款及条件，请与 HY 授权人员联系。

本档或任何 HY 的行为不以禁止反言或其他方式授予任何知识产权的许可，无论显示还是暗示。本文提到的产品名称和标识可能为各自所有者的商标。