# Schottky Rectifier, 100 A



PowerTab™




## FEATURES

- 125 °C $T_J$ operation ($V_R$ < 5 V)
- Optimized for OR-ing applications
- High frequency operation
- Ultralow forward voltage drop
- Continuous high current operation
- Guard ring for enhanced ruggedness and long term reliability
- PowerTab™ package
- Lead (Pb)-free plating

Pb-free

RoHS COMPLIANT

| PRODUCT SUMMARY | |
|---|---|
| $I_{F(AV)}$ | 100 A |
| $V_F$ at 100 A at 25 °C | 0.52 V |
| $I_R$ at 100 °C | 870 mA |
| $V_R$ | 15 V |

## DESCRIPTION

The 100BGQ015 Schottky rectifier has been optimized for ultralow forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125 °C junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems..

| MAJOR RATINGS AND CHARACTERISTICS | | | |
|---|---|---|---|
| SYMBOL | CHARACTERISTICS | VALUES | UNITS |
| $I_{F(AV)}$ | Rectangular waveform | 100 | A |
| | $T_C$ | 88 | °C |
| $V_{RRM}$ | | 15 | V |
| $I_{FSM}$ | $t_p$ = 5 µs sine | 5000 | A |
| $V_F$ | 100 Apk (typical) | 0.39 | V |
| | $T_J$ | 125 | °C |
| $T_J$ | Range | - 55 to 125 | °C |

| VOLTAGE RATINGS | | | | |
|---|---|---|---|---|
| PARAMETER | SYMBOL | TEST CONDITIONS | 100BGQ015 | UNITS |
| Maximum DC reverse voltage | $V_R$ | $T_J$ = 100 °C | 15 | V |
| | | $T_J$ = 125 °C | 5 | |

| ABSOLUTE MAXIMUM RATINGS | | | | | |
|---|---|---|---|---|---|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum average forward current | $I_{F(AV)}$ | 50 % duty cycle at $T_C$ = 88 °C, rectangular waveform | | 100 | A |
| Maximum peak one cycle non-repetitive surge current | $I_{FSM}$ | 5 µs sine or 3 µs rect. pulse | Following any rated load condition and with rated $V_{RRM}$ applied | 5000 | A |
| | | 10 ms sine or 6 ms rect. pulse | | 1000 | |
| Non-repetitive avalanche energy | $E_{AS}$ | $T_J$ = 25 °C, $I_{AS}$ = 2 A, L = 4.5 mH | | 9 | mJ |
| Repetitive avalanche current | $I_{AR}$ | Current decaying linearly to zero in 1 µs<br>Frequency limited by $T_J$ maximum $V_A$ = 3 x $V_R$ typical | | 2 | A |

## ELECTRICAL SPECIFICATIONS

| PARAMETER | SYMBOL | TEST CONDITIONS | | TYP. | MAX. | UNITS |
|---|---|---|---|---|---|---|
| Forward voltage drop | $V_{FM}$ (1) | 50 A | $T_J$ = 25 °C | 0.36 | 0.4 | V |
| | | 100 A | | 0.45 | 0.52 | |
| | | 50 A | $T_J$ = 125 °C | 0.27 | 0.31 | |
| | | 100 A | | 0.39 | 0.45 | |
| Maximum reverse leakage current | $I_{RM}$ (1) | $T_J$ = 100 °C, $V_R$ = 12 V | | 480 | 700 | mA |
| | | $T_J$ = 125 °C, $V_R$ = 5 V | | 1 | 1.2 | A |
| | | $T_J$ = 25 °C | $V_R$ = Rated $V_R$ | 7 | 18 | mA |
| | | $T_J$ = 100 °C | | 580 | 870 | |
| Maximum junction capacitance | $C_T$ | $V_R$ = 5 $V_{DC}$, (test signal range 100 kHz to 1 MHz) 25 °C | | 3800 | | pF |
| Typical series inductance | $L_S$ | Measured from tab to mounting plane | | 3.5 | | nH |
| Maximum voltage rate of change | dV/dt | Rated $V_R$ | | 10 000 | | V/µs |

**Note**

(1) Pulse width < 300 µs, duty cycle < 2 %

## THERMAL - MECHANICAL SPECIFICATIONS

| PARAMETER | | SYMBOL | TEST CONDITIONS | VALUES | UNITS |
|---|---|---|---|---|---|
| Maximum junction temperature range | | $T_J$ | | - 55 to 125 | °C |
| Maximum storage temperature range | | $T_{Stg}$ | | - 55 to 150 | |
| Maximum thermal resistance, junction to case | | $R_{thJC}$ | DC operation | 0.50 | °C/W |
| Maximum thermal resistance, case to heatsink | | $R_{thCS}$ | Mounting surface, smooth and greased | 0.30 | |
| Approximate weight | | | | 5 | g |
| | | | | 0.18 | oz. |
| Mounting torque | minimum | | | 1.2 (10) | N · m (lbf · in) |
| | maximum | | | 2.4 (20) | |
| Marking device | | | Case style PowerTab™ | 100BGQ015 | |

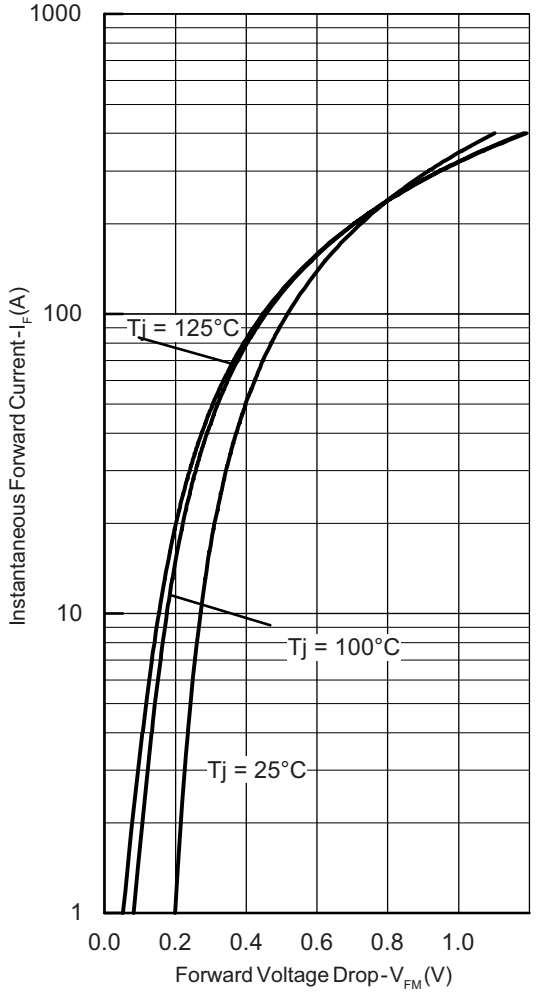



Fig. 1 - Maximum Forward Voltage Drop Characteristics

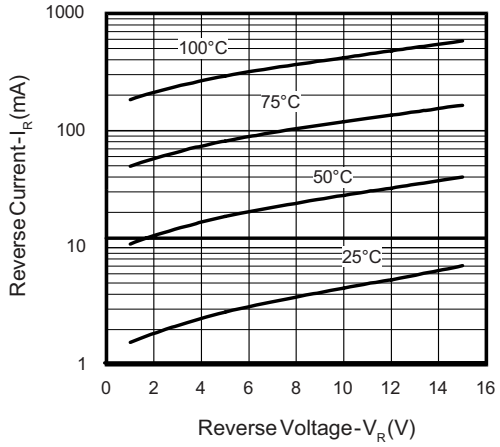



Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

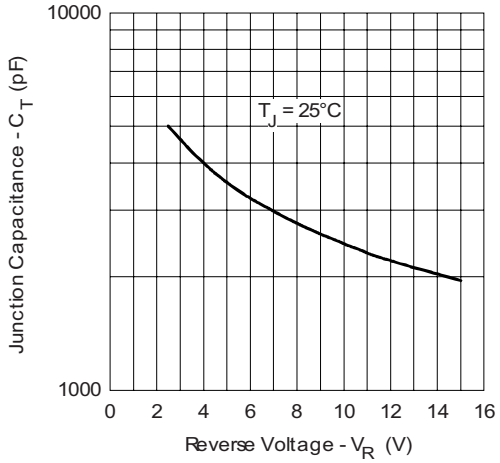



Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

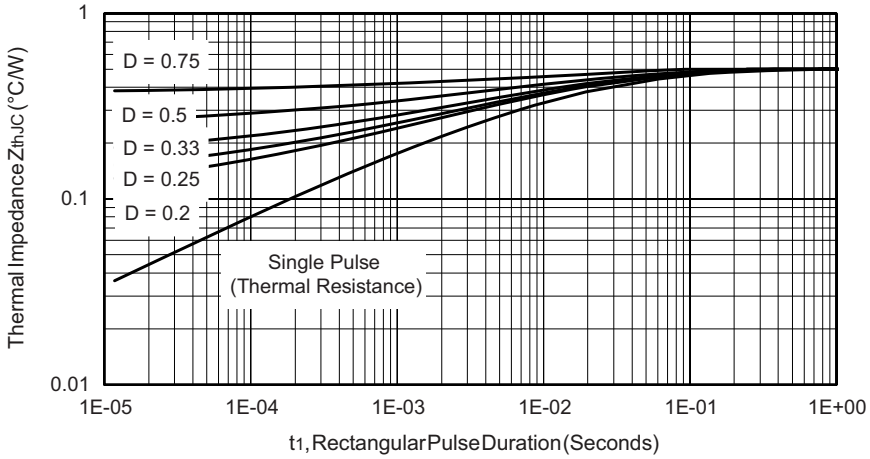



Fig. 4 - Maximum Thermal Impedance $Z_{thJC}$ Characteristics

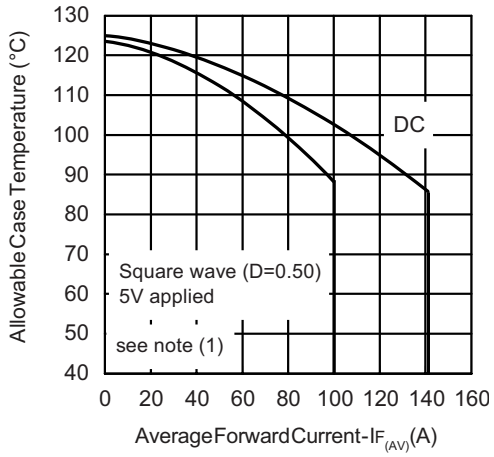



Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

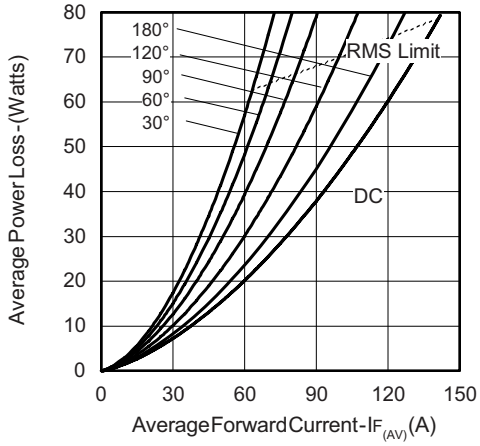



Fig. 6 - Forward Power Loss Characteristics

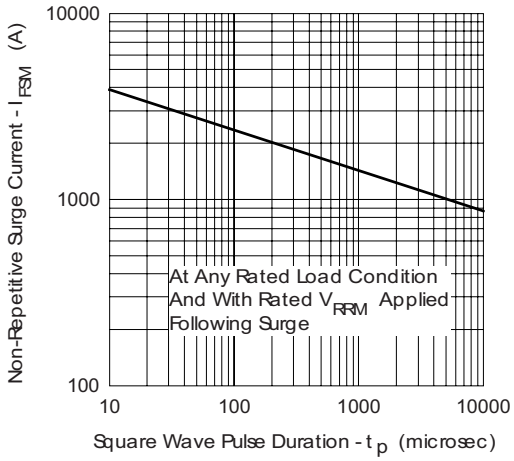



Fig. 7 - Maximum Non-Repetitive Surge Current

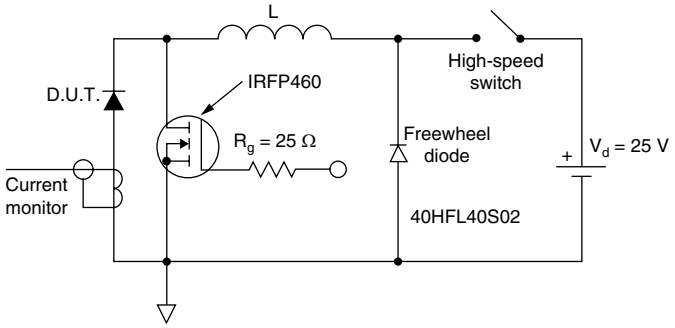




Fig. 8 - Unclamped Inductive Test Circuit

**Note**

(1) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward power loss = $I_{F(AV)} \times V_{FM}$ at ($I_{F(AV)}$/D) (see fig. 6);
$Pd_{REV}$ = Inverse power loss = $V_{R1} \times I_R$ (1 - D); $I_R$ at $V_{R1}$ = 5 V

## ORDERING INFORMATION TABLE

**Device code**




1 - Current rating
2 - Essential part number
3 - Voltage code = $V_{RRM}$

| LINKS TO RELATED DOCUMENTS | |
|---|---|
| Dimensions | http://www.vishay.com/doc?95240 |
| Part marking information | http://www.vishay.com/doc?95370 |

# Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.