


SHEET 1 OF 1

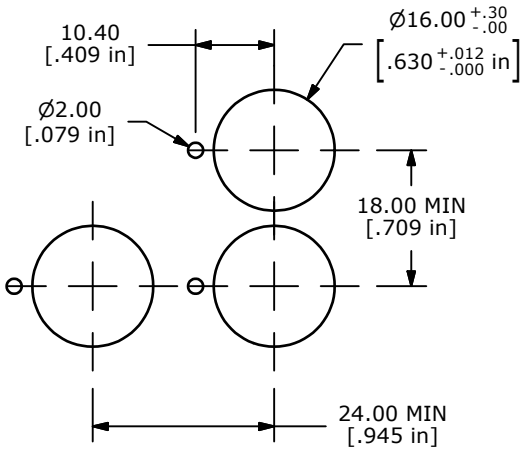



PANEL MOUNTING




SPDT
CONTACT CONFIGURATION

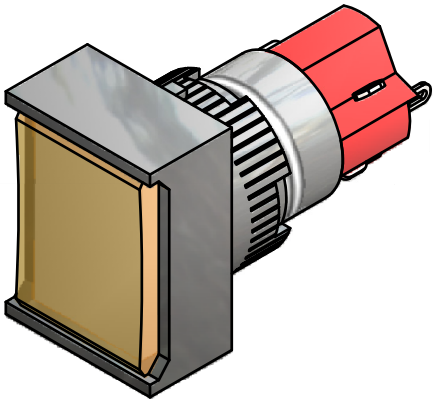

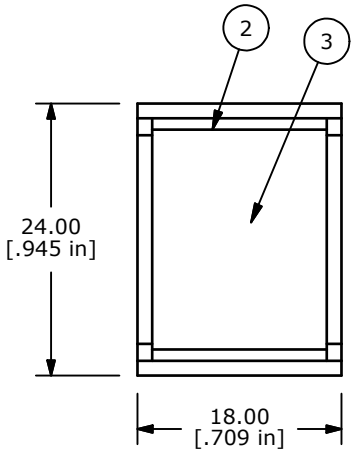

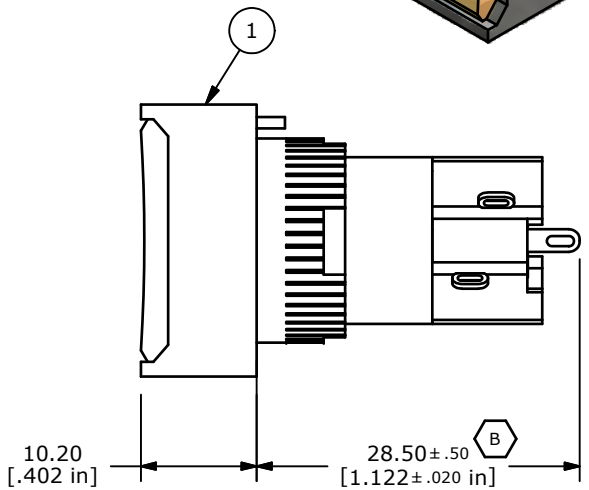



NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. MECHANICAL LIFE: 100,000 CYCLES
5. ELECTRICAL LIFE: 50,000 CYCLES
6. INSULATION RESISTANCE: 1,000 MILLI-OHM MIN.
7. OPERATING TEMPERATURE: -25°C to 55°C
▲8. LAMP VOLTAGE: 14V AC/DC, 80mA
9. ▲ DENOTES CRITICAL PARAMETER.
▲10. CONTACT RATING: 5A@250VAC, 8A@125VAC, 6A@24VDC
11. ACTUATION FORCE: 300g/POLE
12. 2002/95/EC (ROHS) COMPLIANT

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040037	D16OAT21
2	1	F050203	50-002-03 TRANSPARENT ORANGE LENS
3	1	F050404	50-004-04 LAMP INCANDESCENT 14V AC/DC, 80mA

REV	PCR NO	DESCRIPTION	DATE	BY
B	19759	DRAWING UPDATE / CLEAN-UP	3/15/11	BGL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE D16OAT21BORG

SCALE	DATE	DR	DWG	REV
1.5:1	3/15/2011	BGL	XF0065P	B