

## FEATURES

- Ideal for transmitter applications
- Quartz stability
- Ultra miniature SMD package

## PART NUMBERING GUIDE "EXAMPLE"


PART NUMBER	FREQUENCY ABBREVIATION (315.000 MHZ)	TAPE & REEL (1K/REEL)
ECS - 3150 - TR		

Sample Part Number: ECS-DR1-3150-TR

## OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-SDR1-3150			ECS-SDR1-4180			ECS-SDR1-4339			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
CENTER FREQUENCY (fo)		314.925	315.000	315.075	418.925	418.000	418.075	433.845	433.920	433.995	MHz
FREQUENCY TOLERANCE				± 75			± 75			± 75	KHz
INSERTION LOSS			1.5	2.2		1.6	2.0		1.5	2.5	dB
QUALITY FACTOR	Unloaded		12,200			12,100			11,000		Q
	50Ω Unloaded		1,500			2,000			2,000		Q
TEMPERATURE STABILITY	Temperature Coefficient		0.032			0.032			0.032		ppm/°C
FREQUENCY AGING			<± 10			<± 10			<± 10		ppm/Yr
DC INSULATION RESISTANCE		1.0			1.0			1.0			MΩ
MOTIONAL RESISTANCE	R <sub>1</sub>		14	25		20	26		18	26	Ω
MOTIONAL INDUCTANCE	L <sub>1</sub>		86			91			86		pH
MOTIONAL CAPACITANCE	C <sub>1</sub>		2.95			1.6			1.56		fF
SHUNT CAPACITANCE	C <sub>0</sub>		2.4	2.7		2.0	2.3		2.0	2.3	pF
OPERATING TEMPERATURE		-40		+85	-40		+85	-40		+85	°C
STORAGE TEMPERATURE		-40		+85	-40		+85	-40		+85	°C

## PACKAGE DIMENSIONS (mm)

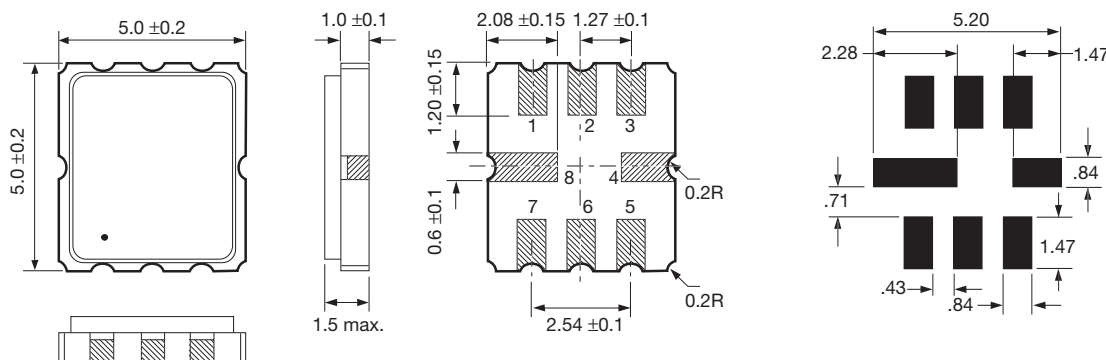

PIN CONNECTIONS	
#1	NO Connect
#2	Input
#3	NO Connect
#4	Ground
#5	NO Connect
#6	Output
#7	No Connect
#8	Ground