

DATASHEET

UF3SC065030B7S

650V-27mΩ SiC FET

Rev. A, December 2020



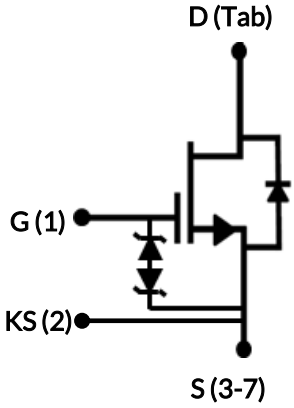

Part Number	Package	Marking
UF3SC065030B7S	D^2PAK-7L	UF3SC065030B7S

Description

This SiC FET device is based on a unique 'cascode' circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device's standard gate-drive characteristics allows for a true "drop-in replacement" to Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the D^2PAK-7L package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads , and any application requiring standard gate drive.

Features

- On-resistance $R_{DS(on)}$: 27mΩ (typ)
- Operating temperature: 175°C (max)
- Excellent reverse recovery: Q_{rr} = 425nC
- Low body diode V_{FSD}: 1.3V
- Low gate charge: Q_G = 43nC
- Threshold voltage $V_{G(th)}$: 5V (typ) allowing 0 to 15V drive
- Package creepage and clearance distance > 6.1mm
- Kelvin source pin for optimized switching performance
- ESD protected, HBM class 2

Typical applications

Any controlled environment such as

- Telecom and Server Power
- Industrial power supplies
- Power factor correction modules
- Motor drives
- Induction heating

Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		650	V
Gate-source voltage	V_{GS}	DC	-25 to +25	V
Continuous drain current [1]	I_D	T_C = 25°C	62	A
		T_C = 100°C	44	A
Pulsed drain current [2]	I_{DM}	T_C = 25°C	230	A
Single pulsed avalanche energy [3]	E_{AS}	L=15mH, I_{AS} =4A	120	mJ
Power dissipation	P_{tot}	T_C = 25°C	214	W
Maximum junction temperature	$T_{J,max}$		175	°C
Operating and storage temperature	T_J, T_{STG}		-55 to 175	°C
Reflow soldering temperature	T_{solder}	reflow MSL 3	260	°C

1. Limited by $T_{J,max}$
2. Pulse width t_p limited by $T_{J,max}$
3. Starting T_J = 25°C

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case	$R_{\theta JC}$			0.54	0.7	°C/W

Electrical Characteristics (T_J = +25°C unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	BV_{DS}	V_{GS}=0V, I_D=1mA	650			V
Total drain leakage current	I_{DSS}	V_{DS}=650V, V_{GS}=0V, T_J=25°C		6	150	µA
		V_{DS}=650V, V_{GS}=0V, T_J=175°C		30		
Total gate leakage current	I_{GSS}	V_{DS}=0V, T_J=25°C, V_{GS}=-20V / +20V		6	± 20	µA
Drain-source on-resistance	$R_{DS(on)}$	V_{GS}=12V, I_D=40A, T_J=25°C		27	35	mΩ
		V_{GS}=12V, I_D=40A, T_J=125°C		36		
		V_{GS}=12V, I_D=40A, T_J=175°C		43		
Gate threshold voltage	$V_{G(th)}$	V_{DS}=5V, I_D=10mA	4	5	6	V
Gate resistance	R_G	f=1MHz, open drain		4.5		Ω

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current [1]	I_S	T_C=25°C			62	A
Diode pulse current [2]	$I_{S,pulse}$	T_C=25°C			230	A
Forward voltage	V_{FSD}	V_{GS}=0V, I_F=20A, T_J=25°C		1.3	1.4	V
		V_{GS}=0V, I_F=20A, T_J=175°C		1.35		
Reverse recovery charge	Q_{rr}	V_R=400V, I_F=50A, V_{GS}=-5V, R_{G_EXT}=10Ω di/dt=2650A/µs, T_J=25°C		425		nC
Reverse recovery time	t_{rr}			25		ns
Reverse recovery charge	Q_{rr}	V_R=400V, I_F=50A, V_{GS}=-5V, R_{G_EXT}=10Ω di/dt=2650A/µs, T_J=150°C		280		nC
Reverse recovery time	t_{rr}			20		ns

Typical Performance - Dynamic

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	C_{iss}	V_{DS}=100V, V_{GS}=0V f=100kHz		1500		pF
Output capacitance	C_{oss}			320		
Reverse transfer capacitance	C_{rss}			2.3		
Effective output capacitance, energy related	$C_{oss(er)}$	V_{DS}=0V to 400V, V_{GS}=0V		230		pF
Effective output capacitance, time related	$C_{oss(tr)}$	V_{DS}=0V to 400V, V_{GS}=0V		520		pF
C_{OSS} stored energy	E_{oss}	V_{DS}=400V, V_{GS}=0V		18.5		µJ
Total gate charge	Q_G	V_{DS}=400V, I_D=40A, V_{GS} = -5V to 12V		43		nC
Gate-drain charge	Q_{GD}			11		
Gate-source charge	Q_{GS}			19		
Turn-on delay time	$t_{d(on)}$	V_{DS}=400V, I_D=40A, Gate Driver =-5V to +12V, Turn-on $R_{G,EXT}$=8.5Ω, Turn-off $R_{G,EXT}$=22Ω Inductive Load, FWD: same device with V_{GS} = -5V, R_G = 22Ω, T_J=25°C		25		ns
Rise time	t_r			28		
Turn-off delay time	$t_{d(off)}$			45		
Fall time	t_f			11		
Turn-on energy	E_{ON}			334		µJ
Turn-off energy	E_{OFF}			90		
Total switching energy	E_{TOTAL}			424		
Turn-on delay time	$t_{d(on)}$	V_{DS}=400V, I_D=40A, Gate Driver =-5V to +12V, Turn-on $R_{G,EXT}$=8.5Ω, Turn-off $R_{G,EXT}$=22Ω Inductive Load, FWD: same device with V_{GS} = -5V, R_G = 22Ω, T_J=150°C		23		ns
Rise time	t_r			26		
Turn-off delay time	$t_{d(off)}$			46		
Fall time	t_f			9		
Turn-on energy	E_{ON}			308		µJ
Turn-off energy	E_{OFF}			75		
Total switching energy	E_{TOTAL}			383		

Typical Performance Diagrams

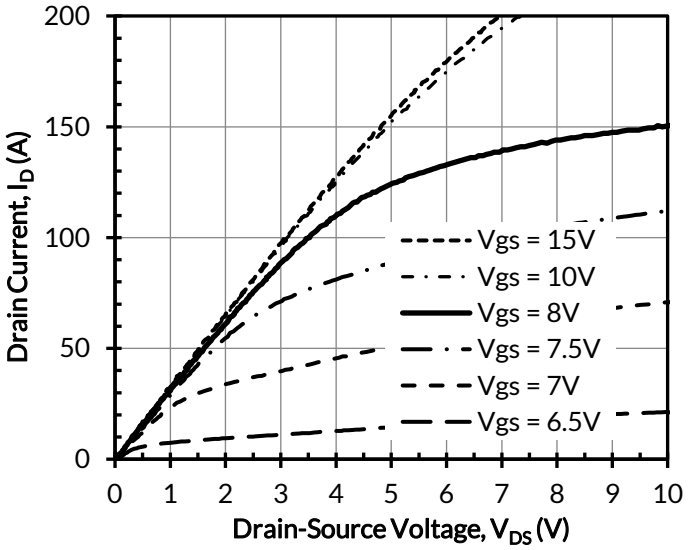


Figure 1. Typical output characteristics at T_J = - 55°C, tp < 250µs

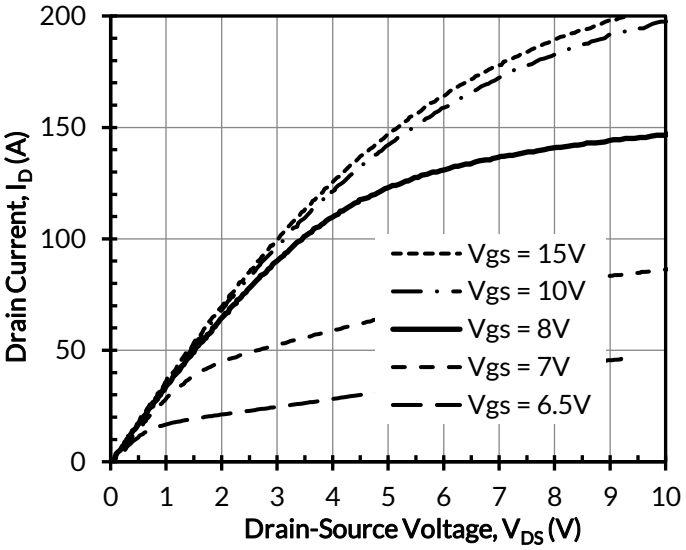


Figure 2. Typical output characteristics at T_J = 25°C, tp < 250µs

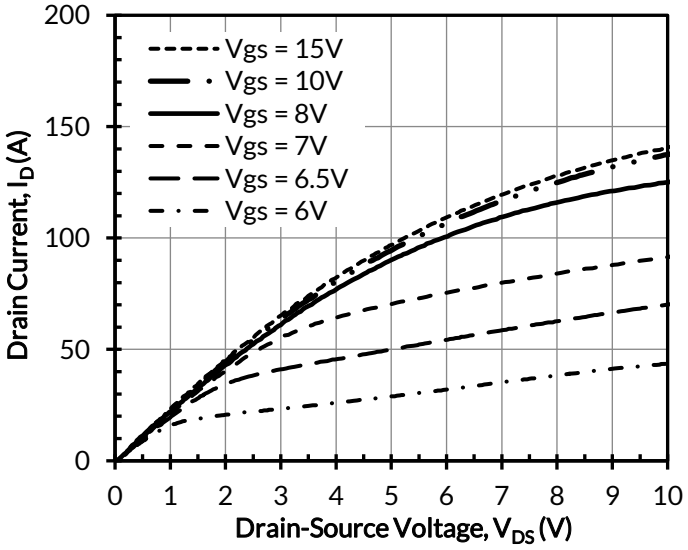


Figure 3. Typical output characteristics at T_J = 175°C, tp < 250µs

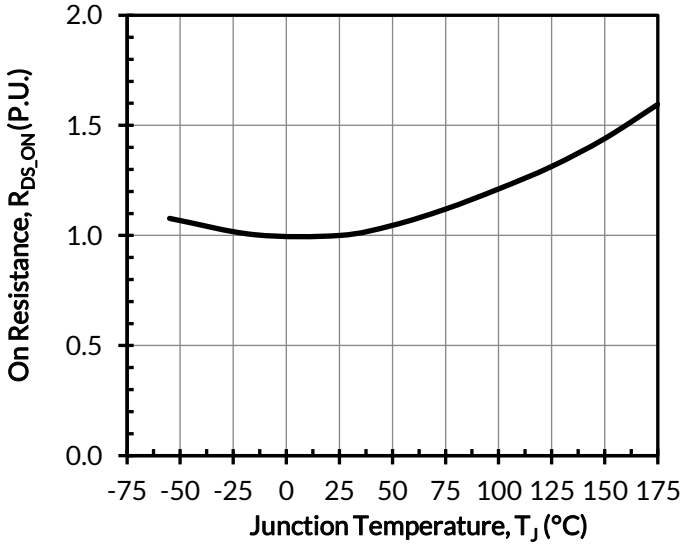


Figure 4. Normalized on-resistance vs. temperature at V_{GS} = 12V and I_D = 40A

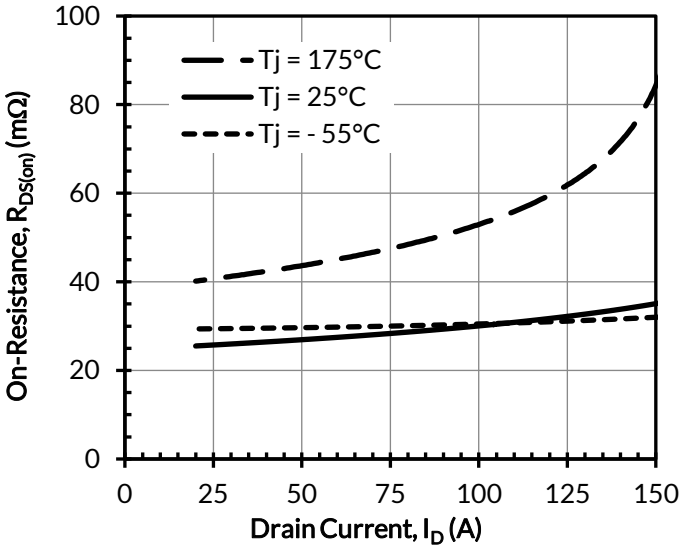


Figure 5. Typical drain-source on-resistances at V_{GS} = 12V

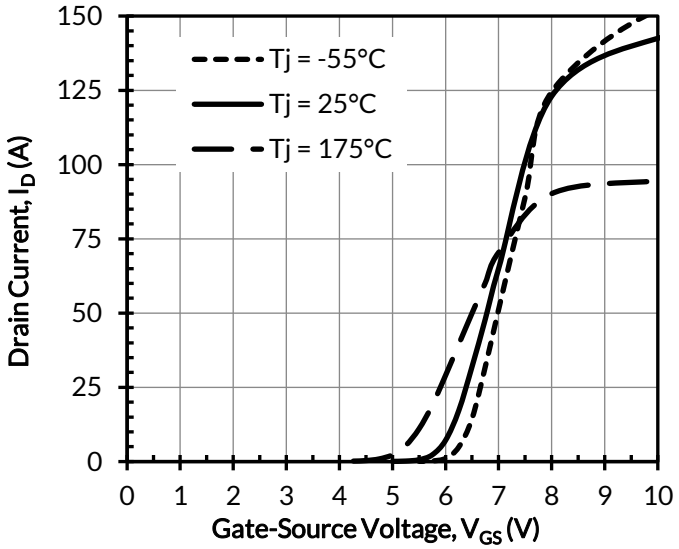


Figure 6. Typical transfer characteristics at V_{DS} = 5V

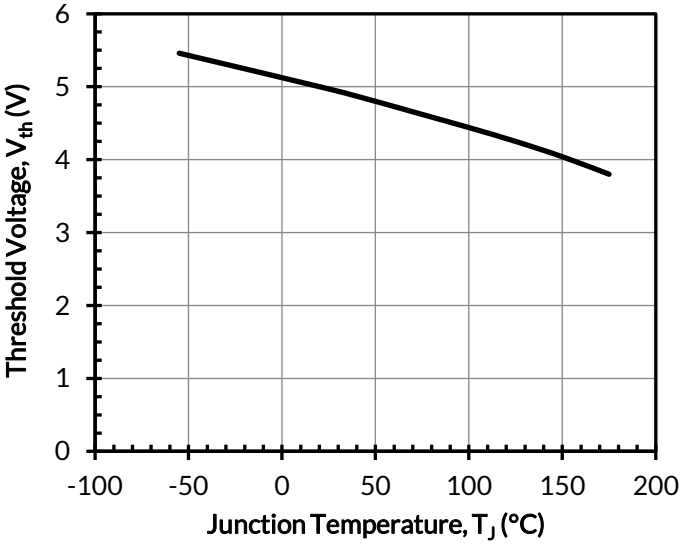


Figure 7. Threshold voltage vs. junction temperature at V_{DS} = 5V and I_D = 10mA

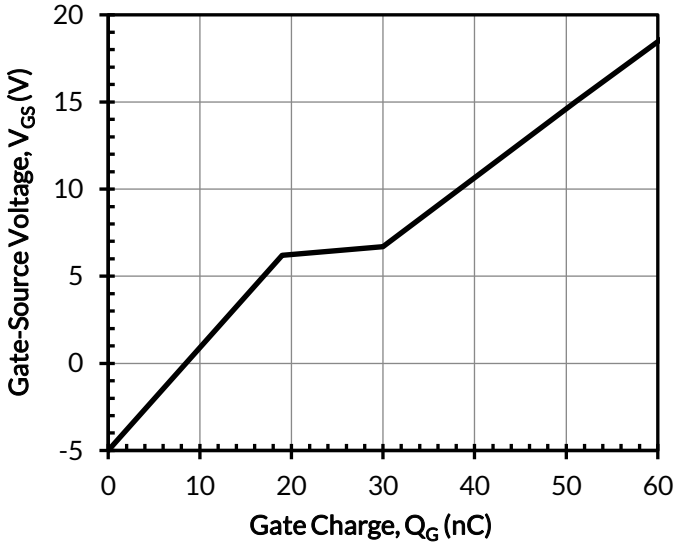


Figure 8. Typical gate charge at V_{DS} = 400V and I_D = 40A

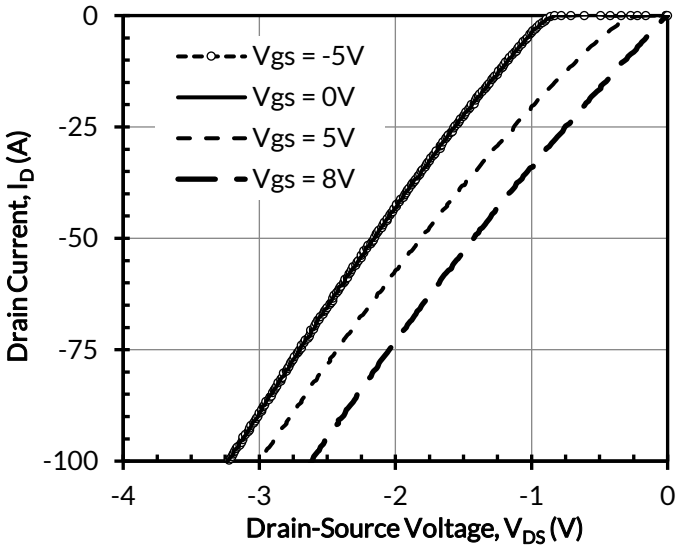


Figure 9. 3rd quadrant characteristics at T_J = -55°C

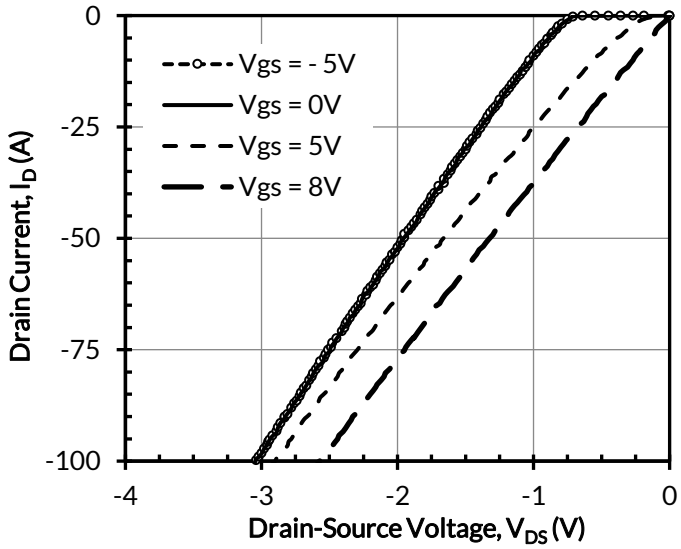


Figure 10. 3rd quadrant characteristics at T_J = 25°C

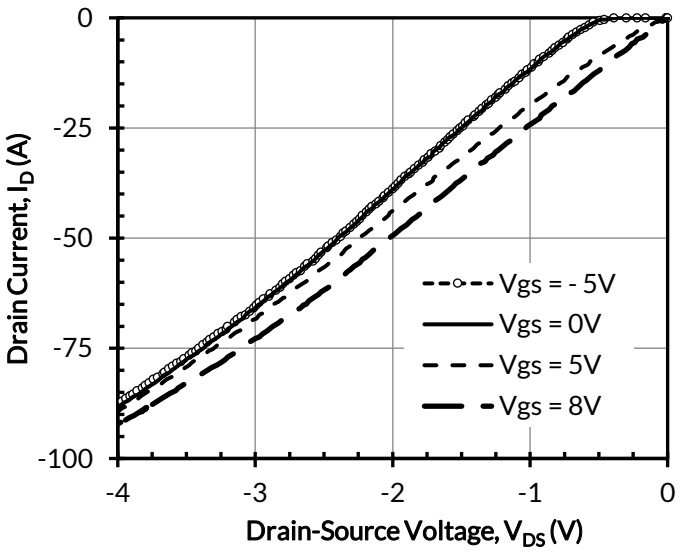


Figure 11. 3rd quadrant characteristics at T_J = 175°C

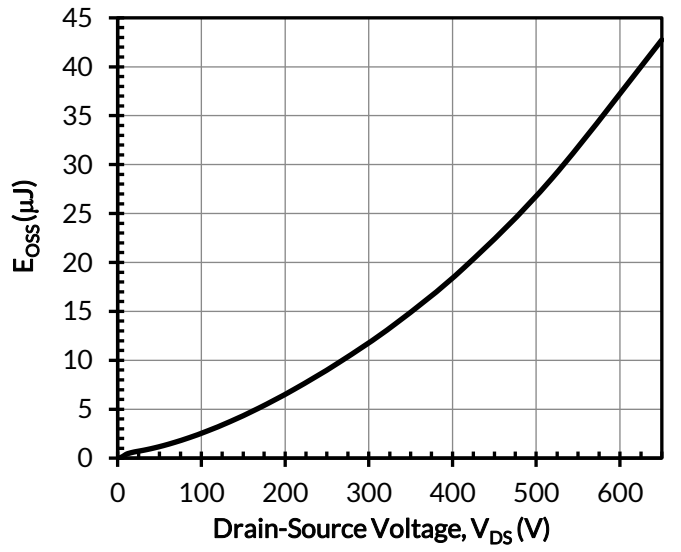


Figure 12. Typical stored energy in C_{OSS} at V_{GS} = 0V

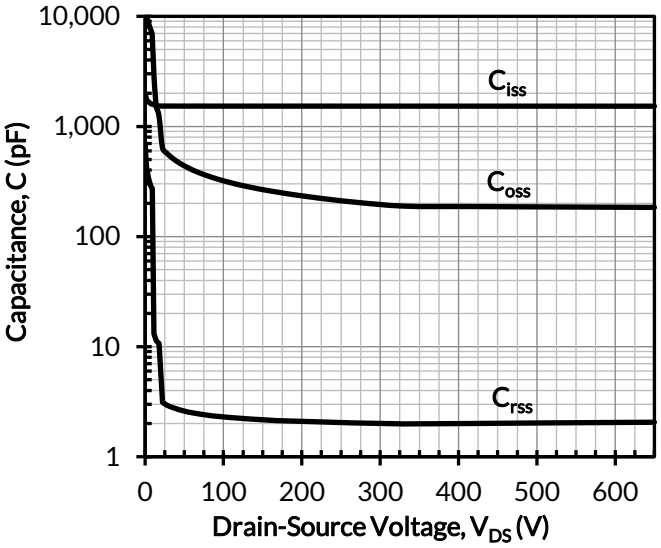


Figure 13. Typical capacitances at f = 100kHz and V_{GS} = 0V

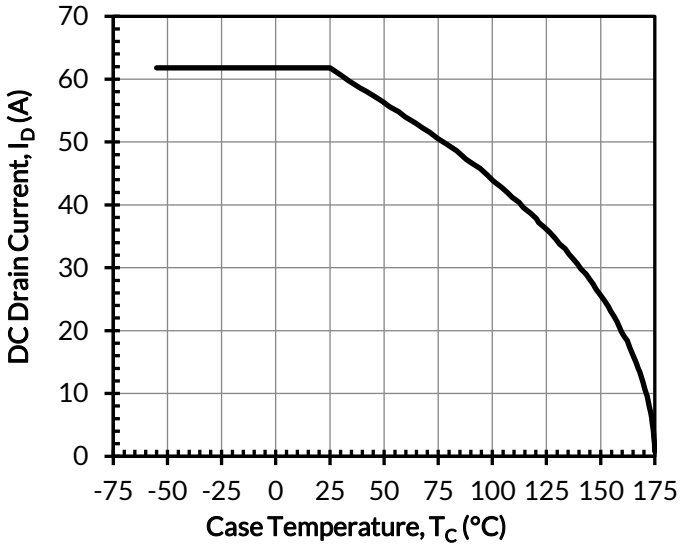


Figure 14. DC drain current derating

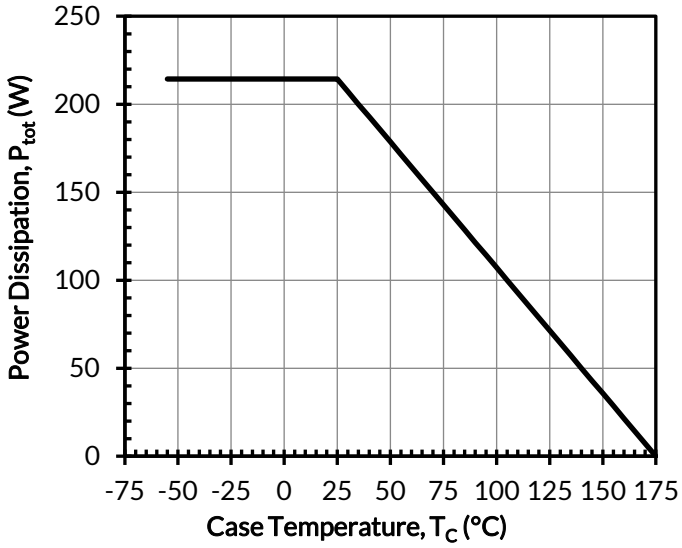


Figure 15. Total power dissipation

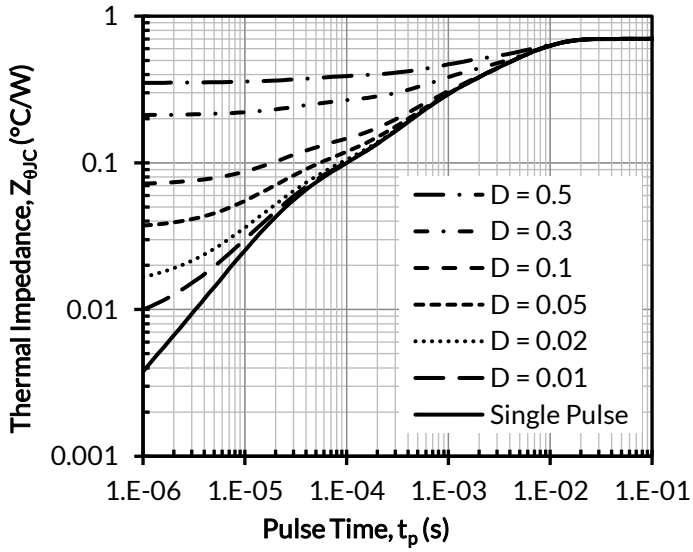


Figure 16. Maximum transient thermal impedance

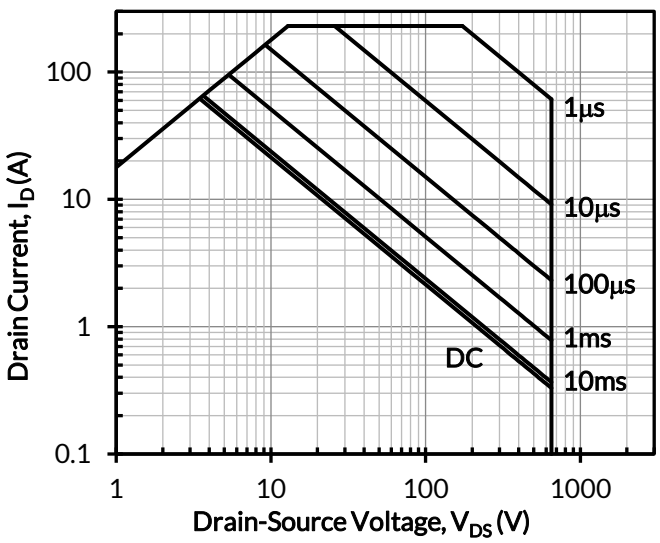


Figure 17. Safe operation area at T_C = 25°C, D = 0, Parameter t_p

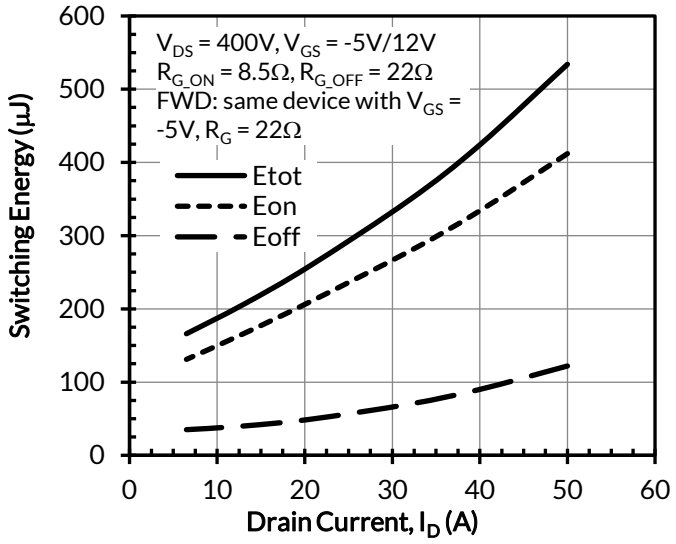


Figure 18. Clamped inductive switching energy vs. drain current at T_J = 25°C

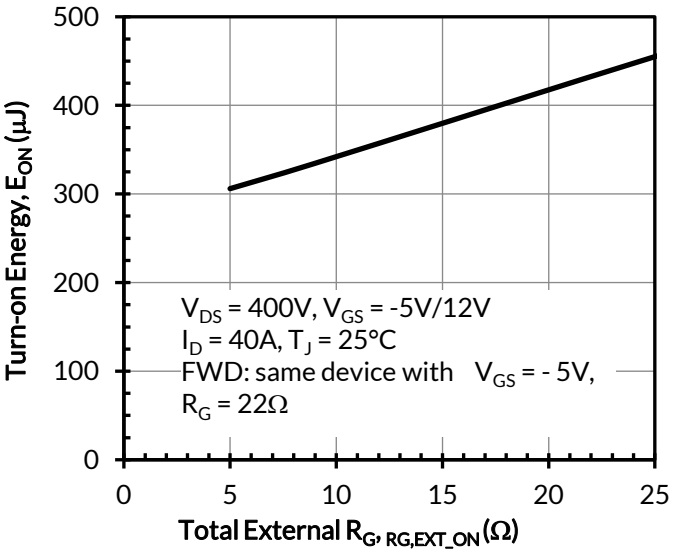


Figure 19. Clamped inductive switching turn-on energy vs. R_{G,EXT_ON}

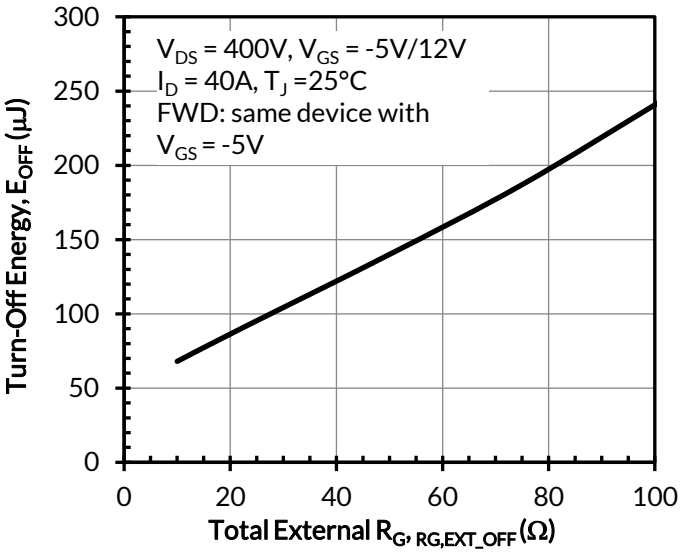


Figure 20. Clamped inductive switching turn-off energy vs. R_{G,EXT_OFF}

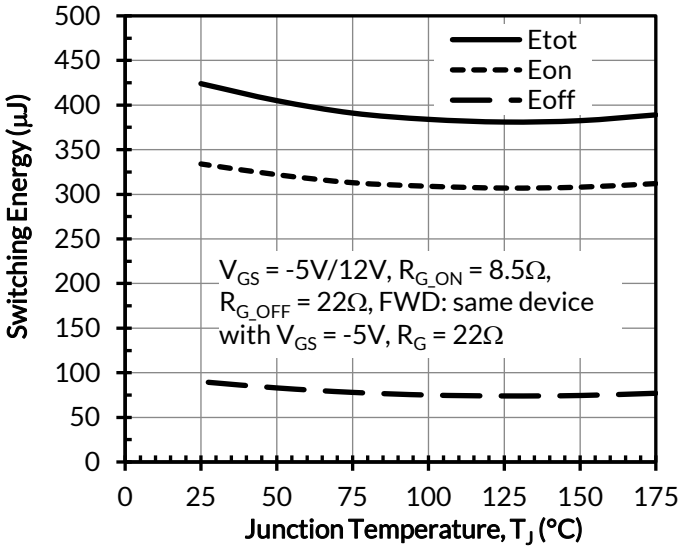


Figure 21. Clamped inductive switching energy vs. junction temperature at V_{DS} = 400V and I_D = 40A

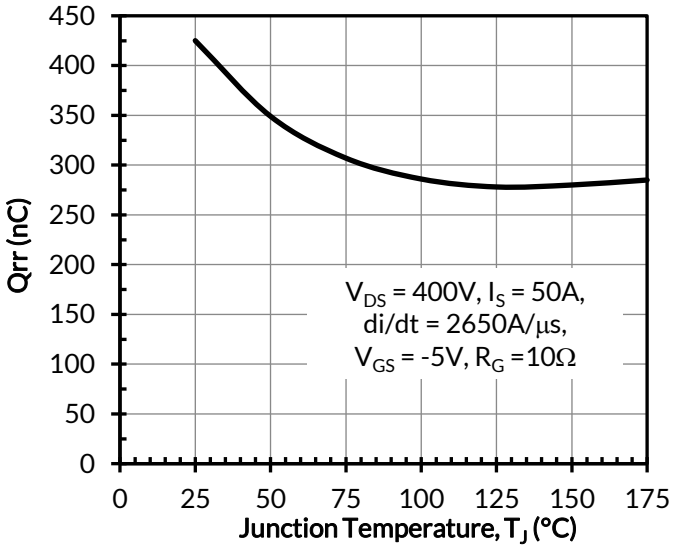


Figure 22. Reverse recovery charge Qrr vs. junction temperature

Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Qrr) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see www.unitedsic.com.

Disclaimer

UnitedSiC reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. UnitedSiC assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

UnitedSiC assumes no liability whatsoever relating to the choice, selection or use of the UnitedSiC products and services described herein.